




CVR-2 Dual Industrial tachometers

Designed for industrial use, this instrument packs two Tachometers with a wide range (440 Krpm to 0.001 rpm), high resolution (better than 1 in 15.000), null latency (one high resolution measurement per input pulse), standard computer interface (RS485, half-duplex), for fast delivery of formatted values of the measurements.

Easy to configure, each channel has a programmable front-end filter. Standard mount in DIN Rail.

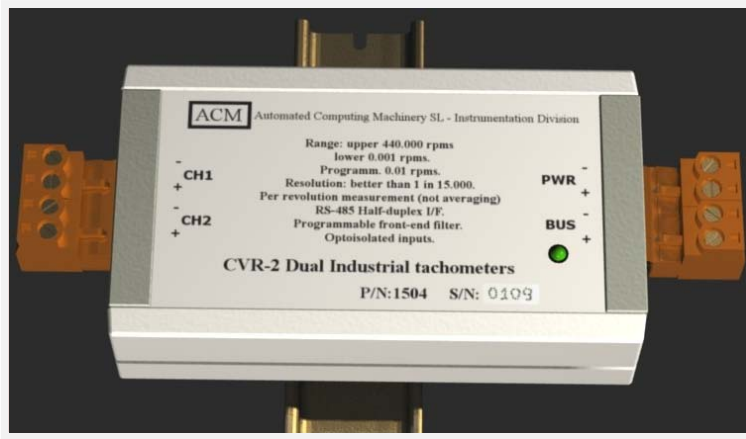

Performance: able to report small rpms changes (i.e. jump from 1499.9 -motoring- to 1500.1 - production-) in real time (a measurement each turn of the axis), so it can also be use in control loops that need fast response time (i.e. connection to the grid in a cogeneration installation).

Typical applications:

- Measurement in real time of generator rpms and blades rpms in a windmill or any other installation of turning machines.
- In the feedback loop of a control system.
- In ATE (Automatic Test Equipments).

Characteristics:

Range: from 0.001 rpm to 440 K rpms.

Definition of 0 rpms: programmable

Programmable input filter: 5 ranges

Optoisolated input: one pulse per turn.

Communications: RS485 half duplex, 38400 bauds.

Output: ASCII fixed format

Commands set:

Set Address: `%(OldAddr)(NewAddr)(Checksum)<CR>`

Answers: OK: `!(OldAddr)(Checksum)<CR>` With error: `?(OldAddr)(Checksum)<CR>`

Query RPM value: `#(Addr)(CounterNo)D(Checksum)<CR>`

Answers: OK: `>(Data)(Checksum)<CR>` [(Data) made up of 10 dígits]

With error `?(Addr)(Checksum)<CR>`

Set Filter value: `$(Addr)4(CounterNo)(Filter)<CR>` [Filter es one dígito between 0 and 4, see below]

Answers: OK `!(Addr)(Checksum)<CR>` With error: `?(Addr)(Checksum)<CR>`

Reading actual filter value: `$(Addr)4(CounterNo)<CR>`

Answers: OK: `!(Addr)(Filter)(Checksum)<CR>` With error `?(Addr)(Checksum)<CR>`

Values for the front-end filter:

0: no filter

1: up to 440000 rpms (aprox 7300 Hz)

2: up to 120000 rpms (aprox 2000 Hz)

3: up to 9500 rpms (aprox 160 Hz)

4: up to 900 rpms (aprox 15 Hz)