



pure device: $\alpha = (d^2I/dV^2)/(2K_0)$, original and denoised. Lines: solid confirmed, dashed single-half (+V), dotted tentative (+V)


pure 11_12 L = 2.00 mm, $K_0 = 2.77\text{e-}05 \text{ A V}^{-2}$

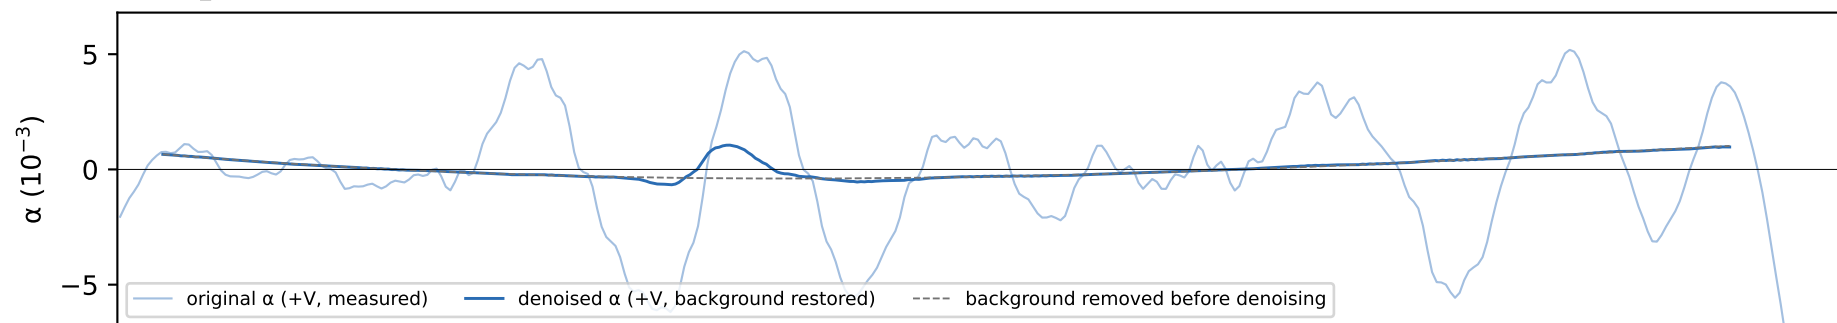


pure 11_21 L = 2.00 mm, $K_0 = 2.77\text{e-}05 \text{ A V}^{-2}$

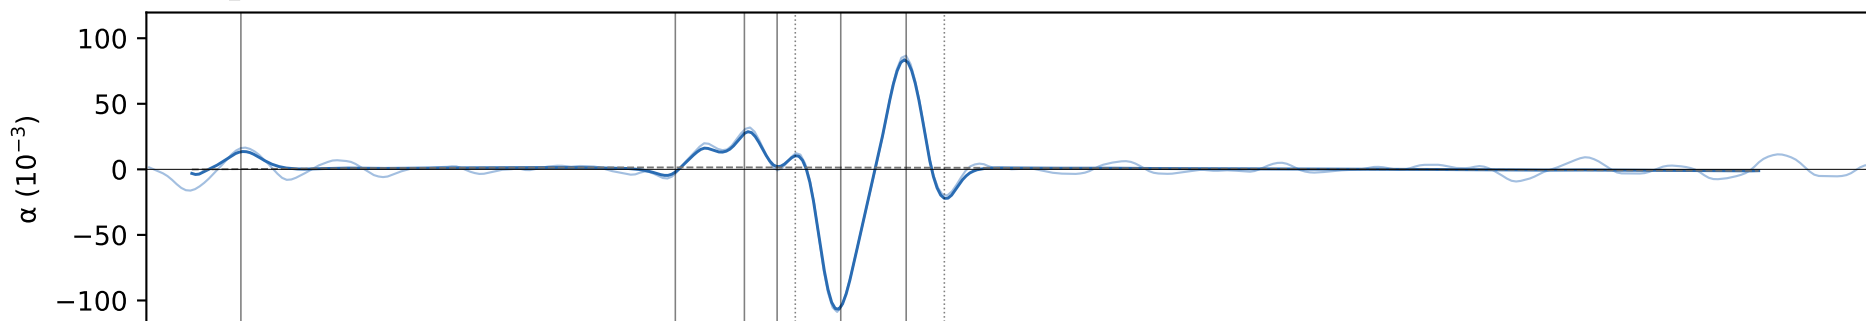


pure 11_22 L = 2.83 mm, $K_0 = 1.96\text{e-}05 \text{ A V}^{-2}$

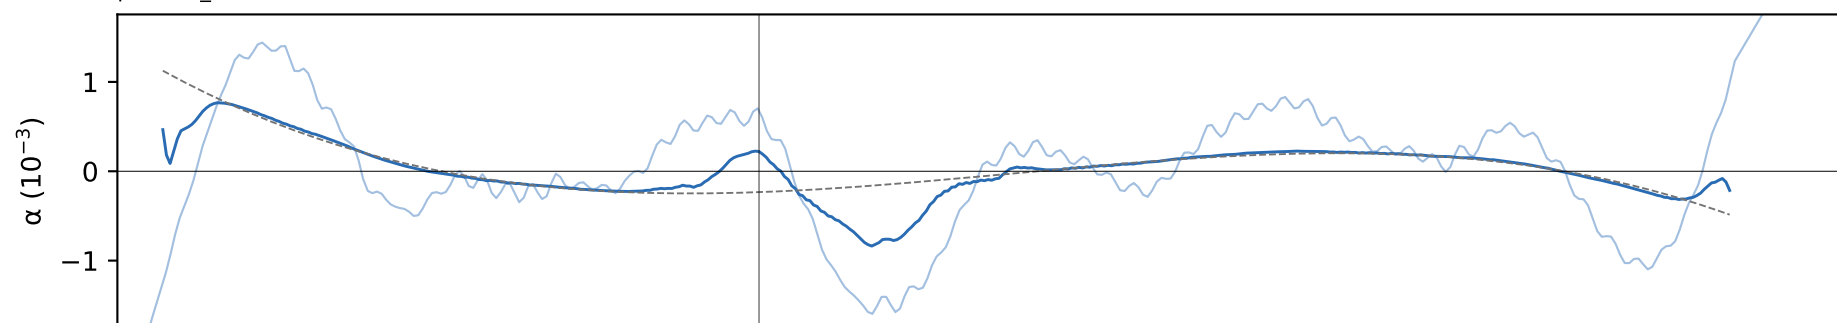


pure 12_13 L = 2.00 mm, $K_0 = 2.77\text{e-}05 \text{ A V}^{-2}$

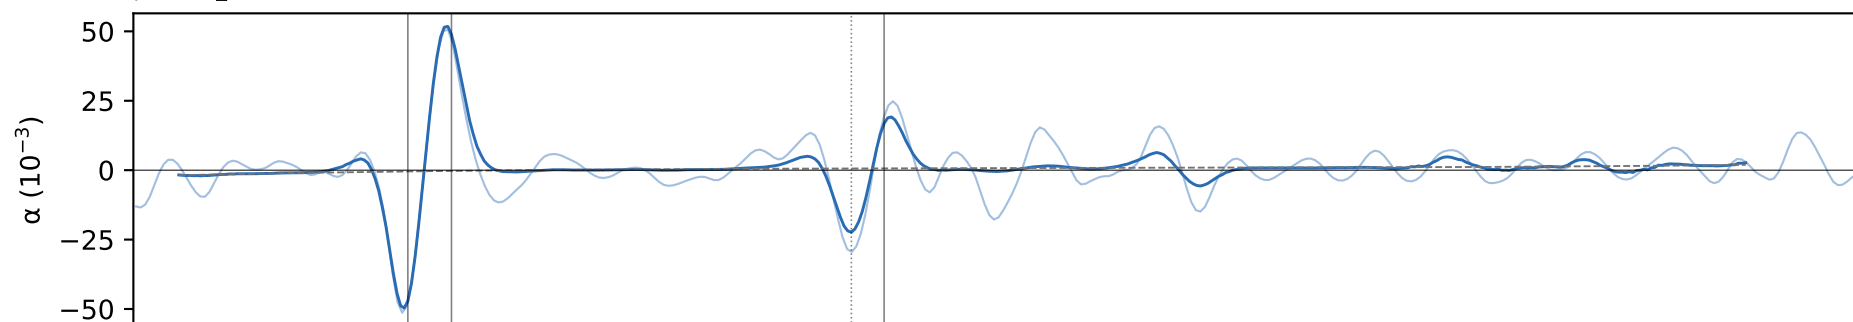

pure 12_21 L = 2.83 mm, $K_0 = 1.96\text{e-}05 \text{ A V}^{-2}$

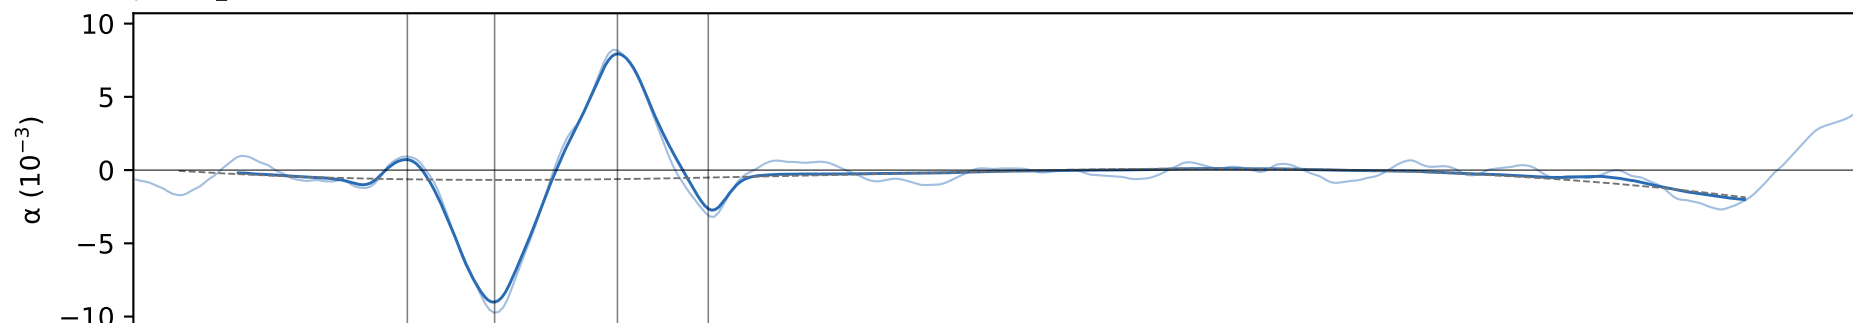


pure 12_22 L = 2.00 mm, $K_0 = 2.77\text{e-}05 \text{ A V}^{-2}$

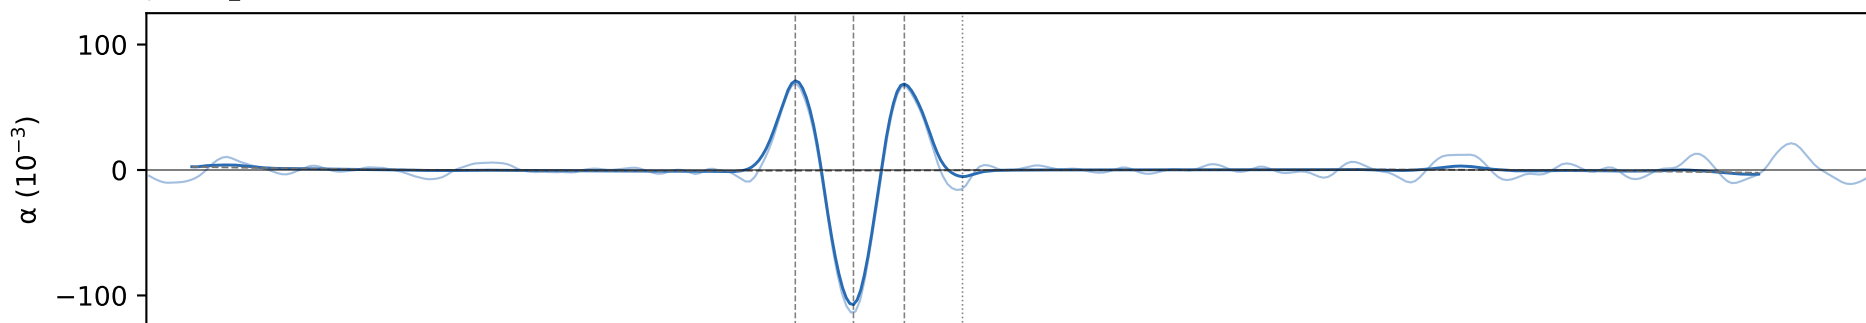


wavenumber, +V axis (cm^{-1})

pure device: $\alpha = (d^2I/dV^2)/(2K_0)$, original and denoised. Lines: solid confirmed, dashed single-half (+V), dotted tentative (+V)


pure 12_23 L = 2.83 mm, $K_0 = 1.96e-05 \text{ A V}^{-2}$

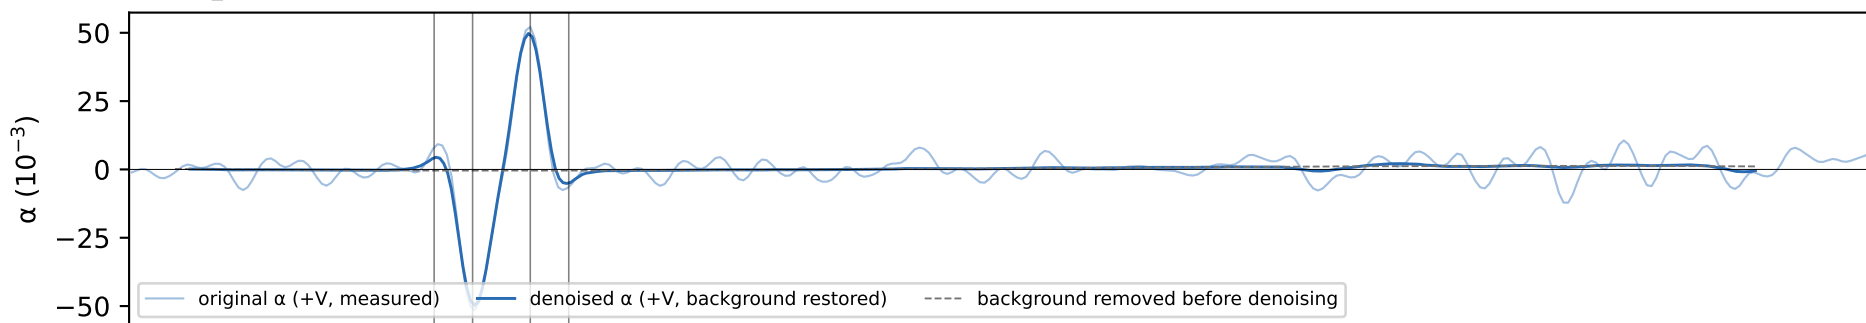


pure 13_14 L = 2.00 mm, $K_0 = 2.77e-05 \text{ A V}^{-2}$

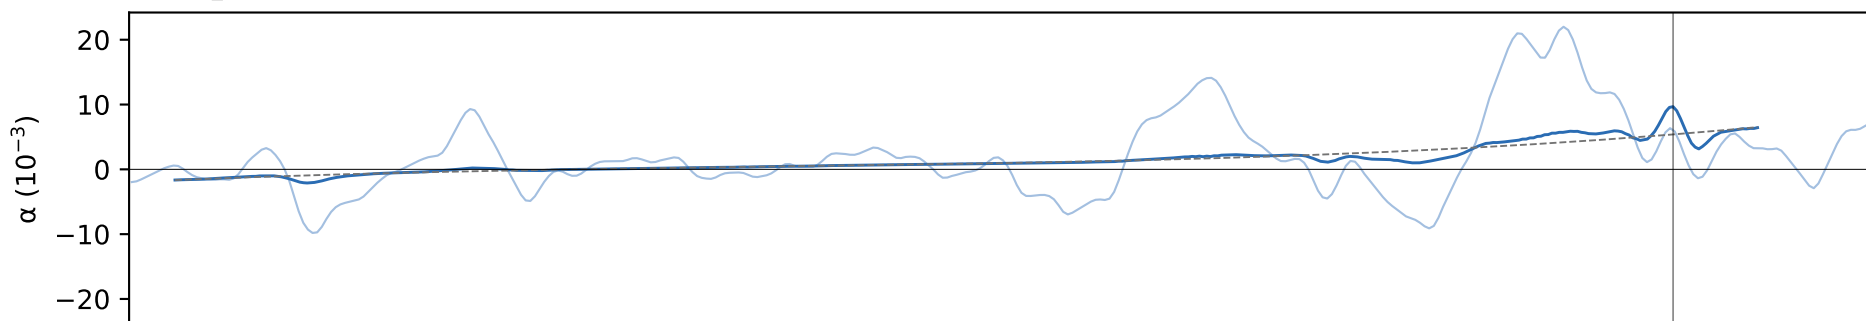


pure 13_22 L = 2.83 mm, $K_0 = 1.96e-05 \text{ A V}^{-2}$

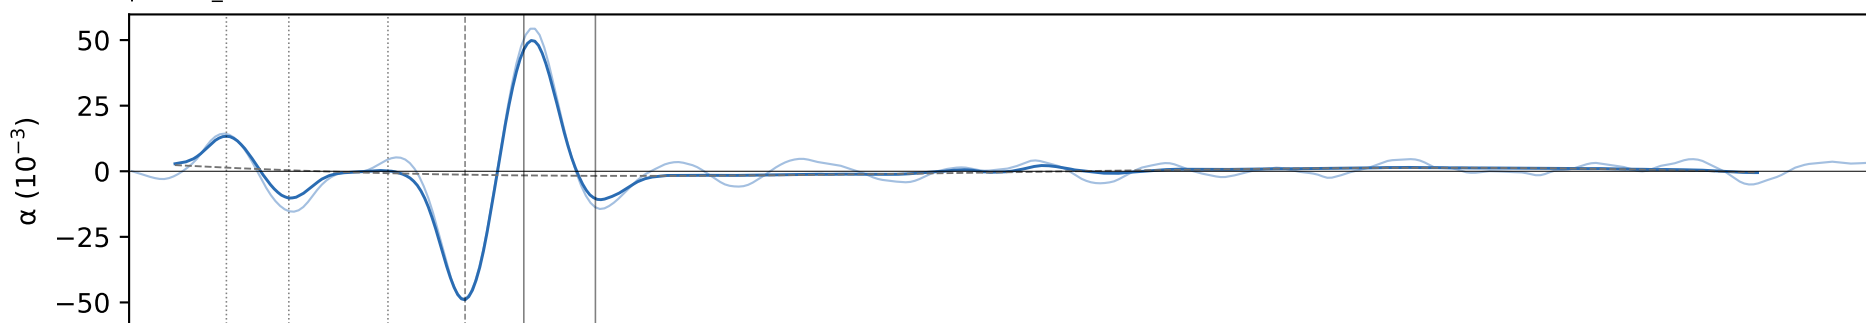


pure 13_23 L = 2.00 mm, $K_0 = 2.77e-05 \text{ A V}^{-2}$

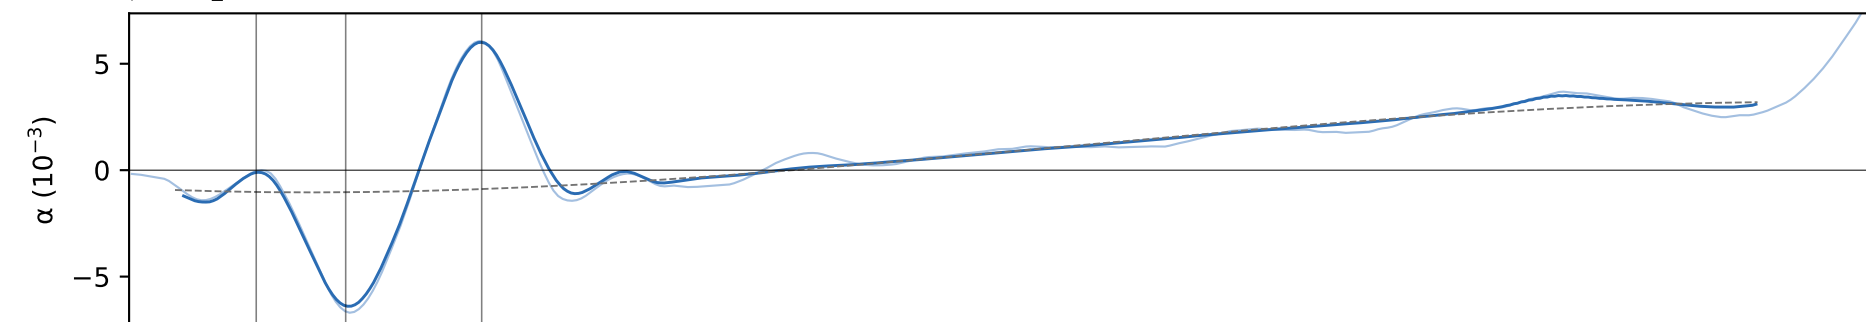

pure 13_24 L = 2.83 mm, $K_0 = 1.96e-05 \text{ A V}^{-2}$

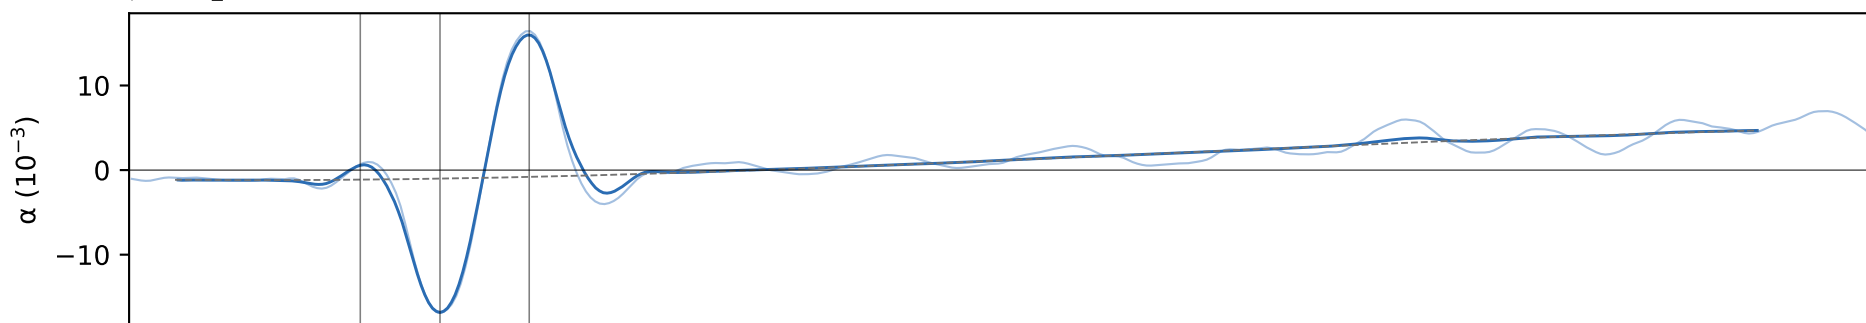


pure 14_23 L = 2.83 mm, $K_0 = 1.96e-05 \text{ A V}^{-2}$

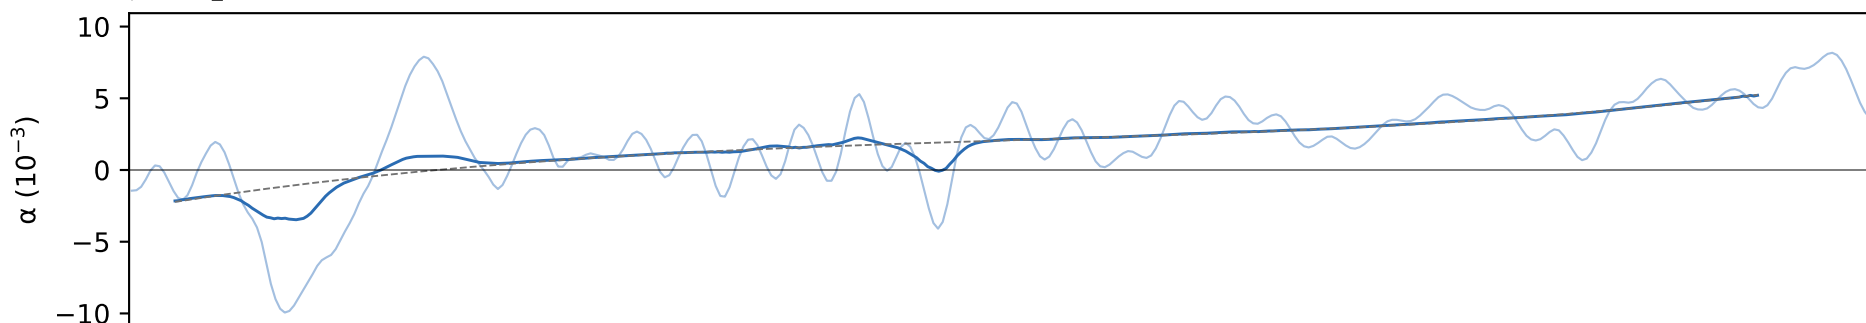


wavenumber, +V axis (cm^{-1})

pure device: $\alpha = (d^2I/dV^2)/(2K_0)$, original and denoised. Lines: solid confirmed, dashed single-half (+V), dotted tentative (+V)


pure 14_24 L = 2.00 mm, K0 = 2.77e-05 A V⁻²

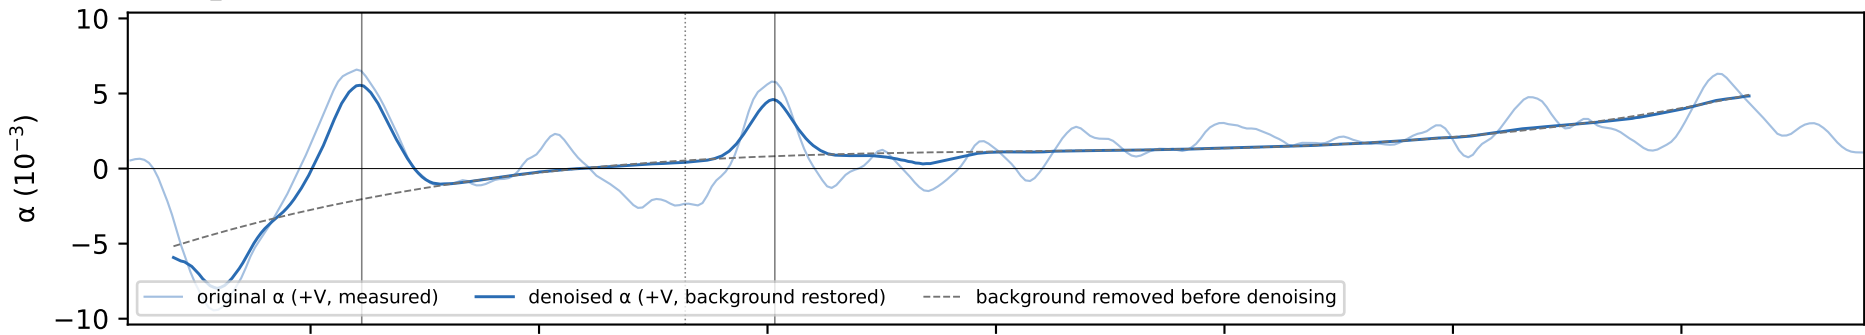


pure 21_22 L = 2.00 mm, K0 = 2.77e-05 A V⁻²

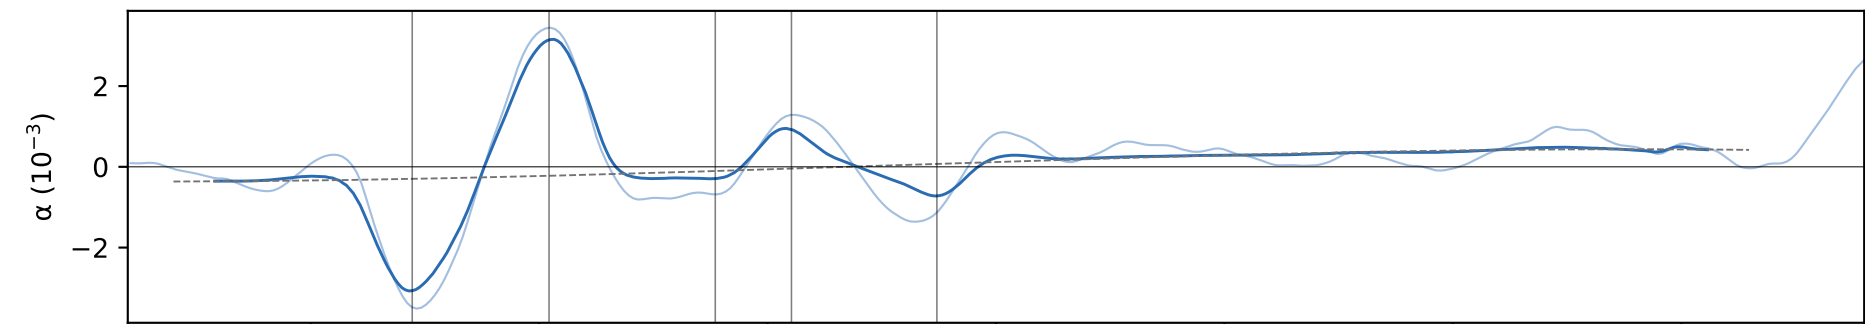


pure 21_31 L = 2.00 mm, K0 = 2.77e-05 A V⁻²

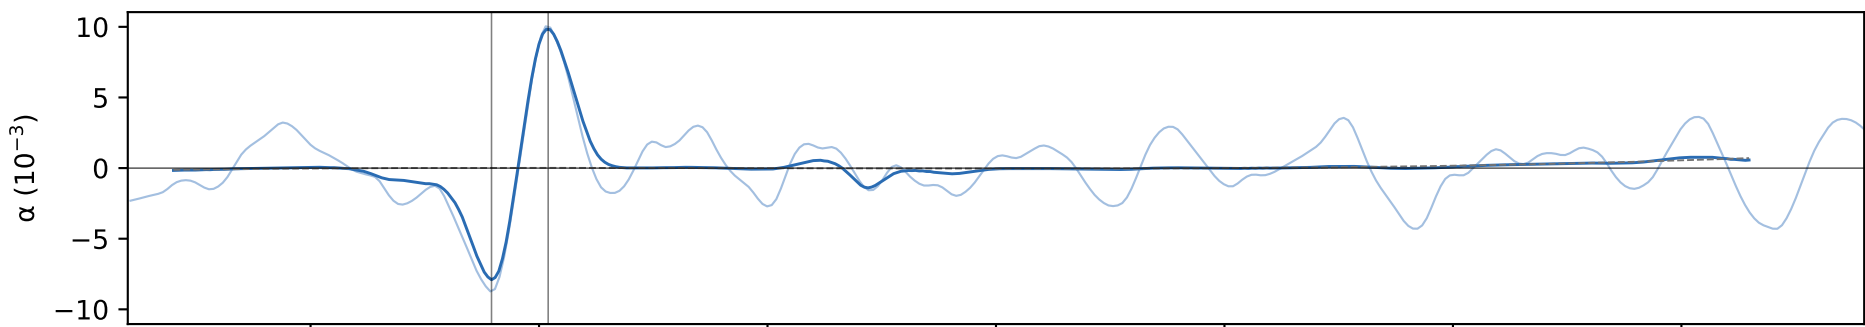


pure 21_32 L = 2.83 mm, K0 = 1.96e-05 A V⁻²

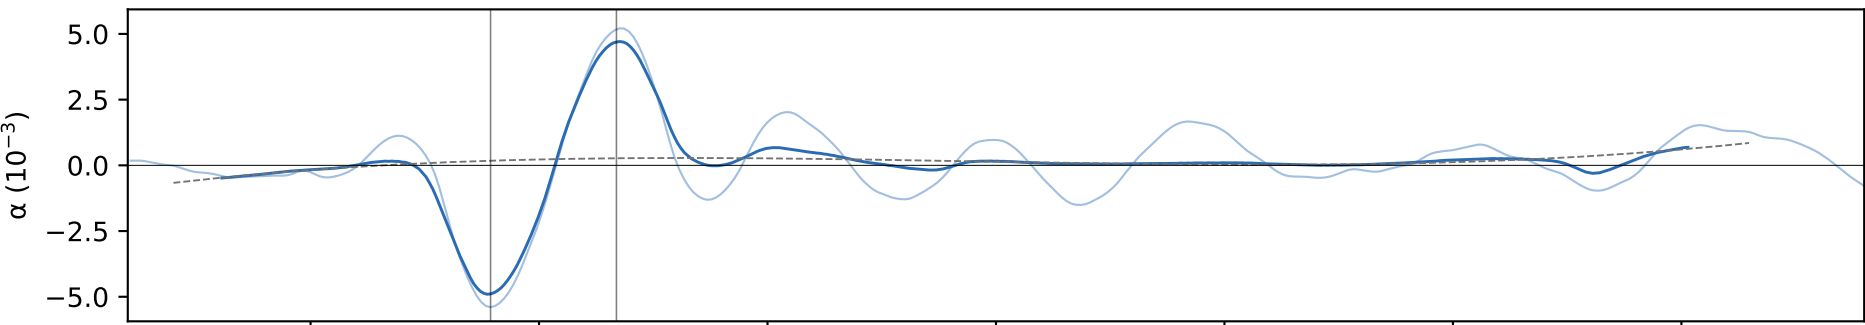

pure 22_23 L = 2.00 mm, K0 = 2.77e-05 A V⁻²

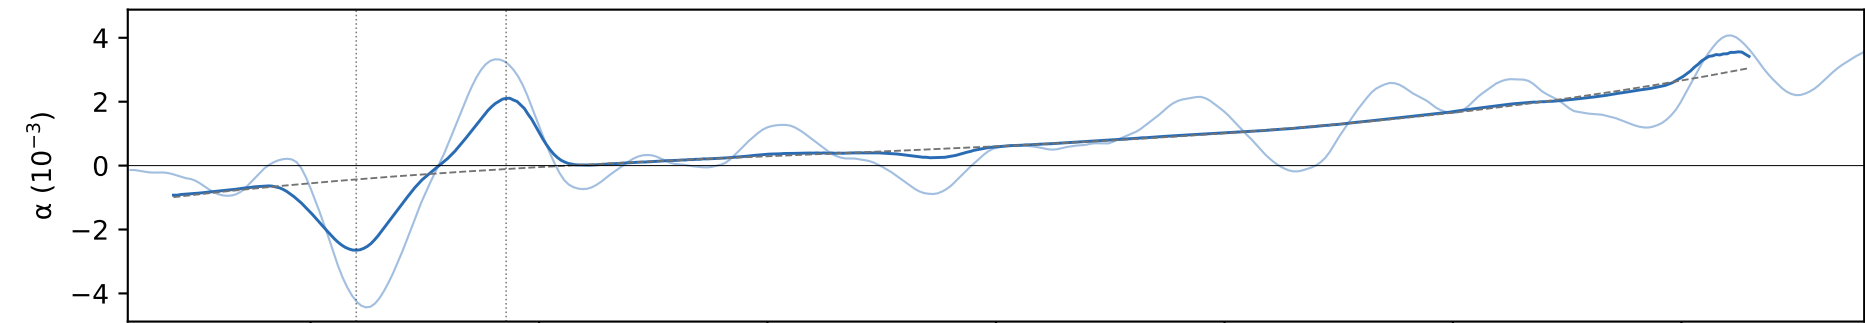


pure 22_31 L = 2.83 mm, K0 = 1.96e-05 A V⁻²

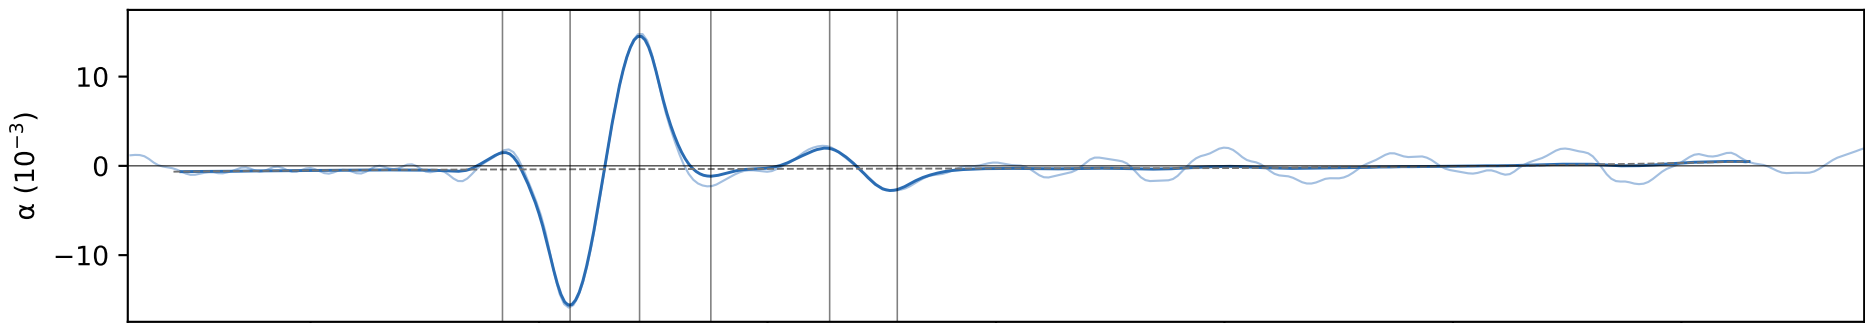


wavenumber, +V axis (cm⁻¹)

pure device: $\alpha = (d^2I/dV^2)/(2K_0)$, original and denoised. Lines: solid confirmed, dashed single-half (+V), dotted tentative (+V)


pure 22_32 L = 2.00 mm, $K_0 = 2.77\text{e-}05 \text{ A V}^{-2}$

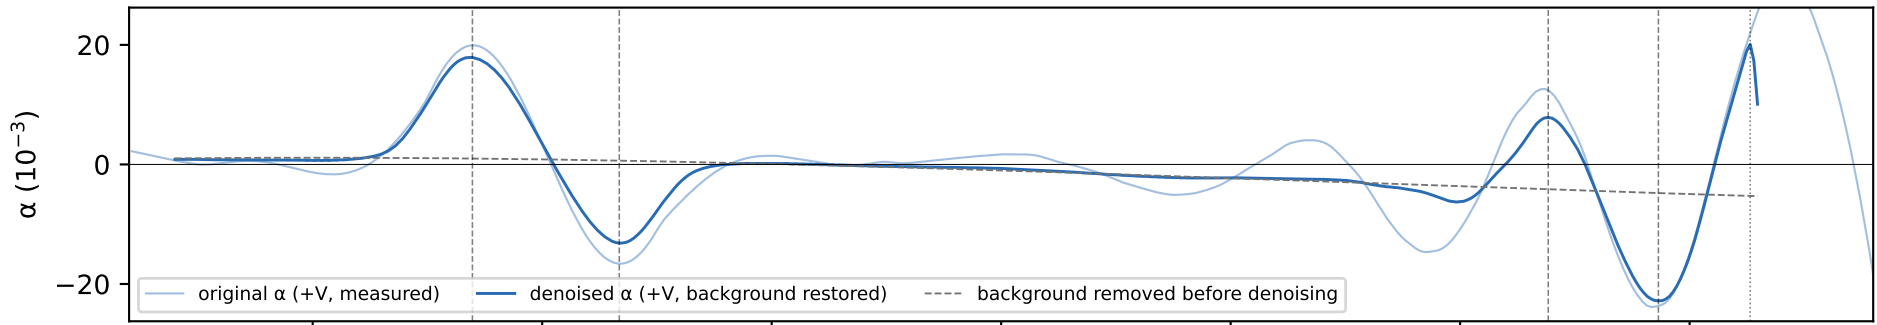


pure 22_33 L = 2.83 mm, $K_0 = 1.96\text{e-}05 \text{ A V}^{-2}$

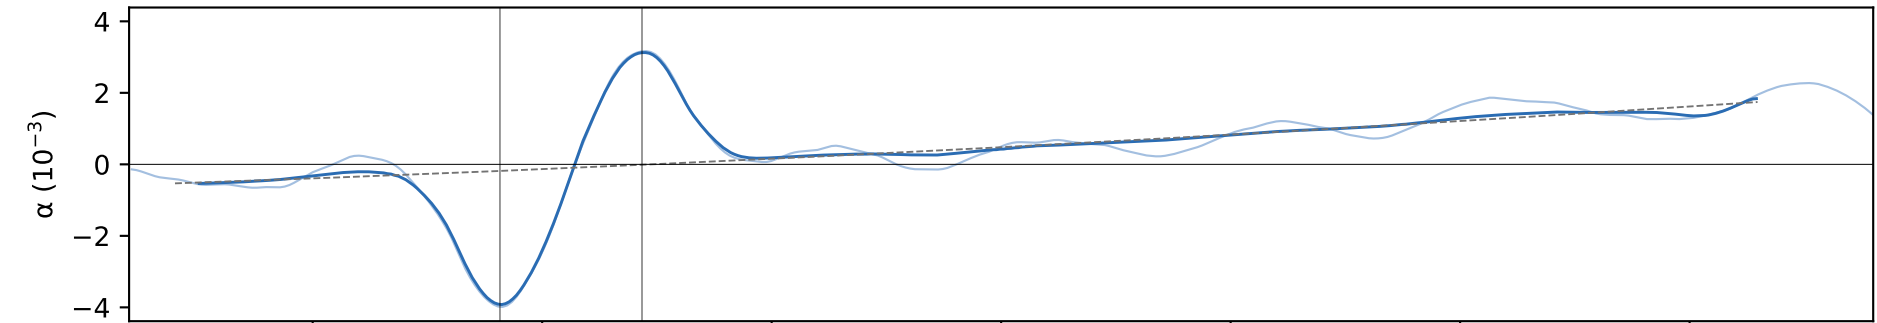


pure 23_24 L = 2.00 mm, $K_0 = 2.77\text{e-}05 \text{ A V}^{-2}$

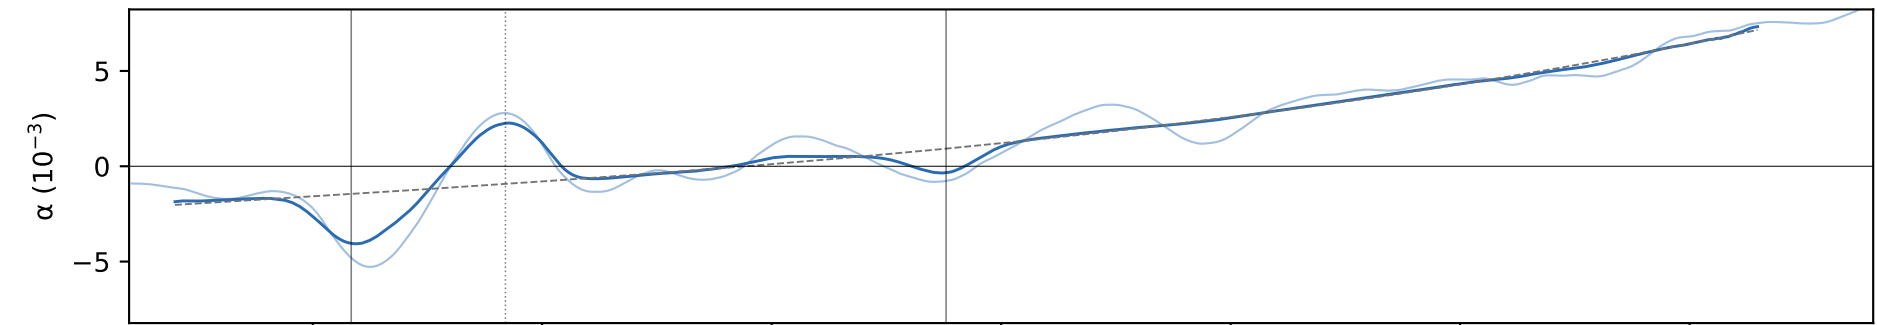


pure 23_32 L = 2.83 mm, $K_0 = 1.96\text{e-}05 \text{ A V}^{-2}$

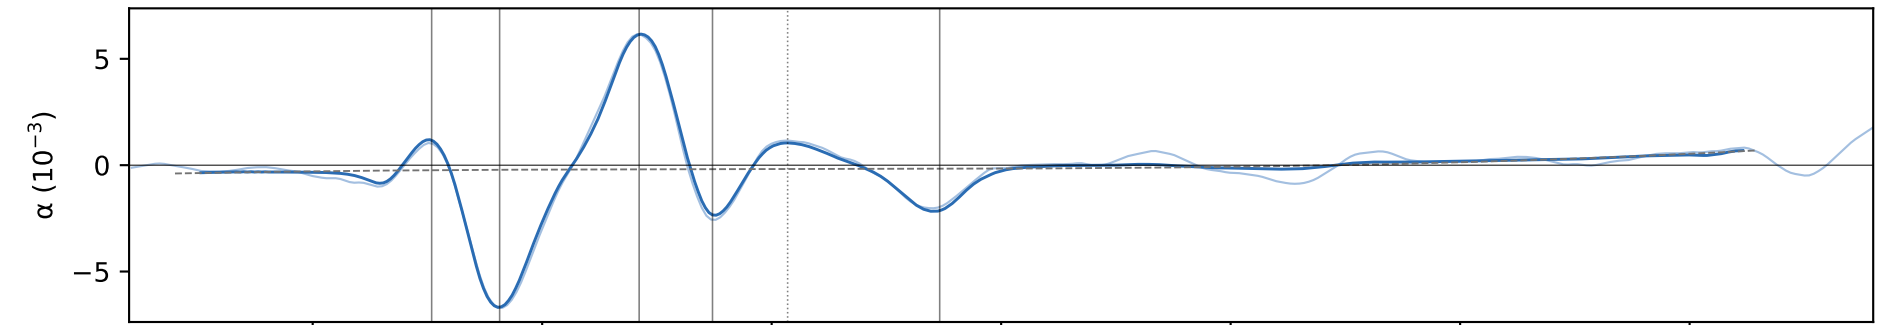

pure 23_33 L = 2.00 mm, $K_0 = 2.77\text{e-}05 \text{ A V}^{-2}$

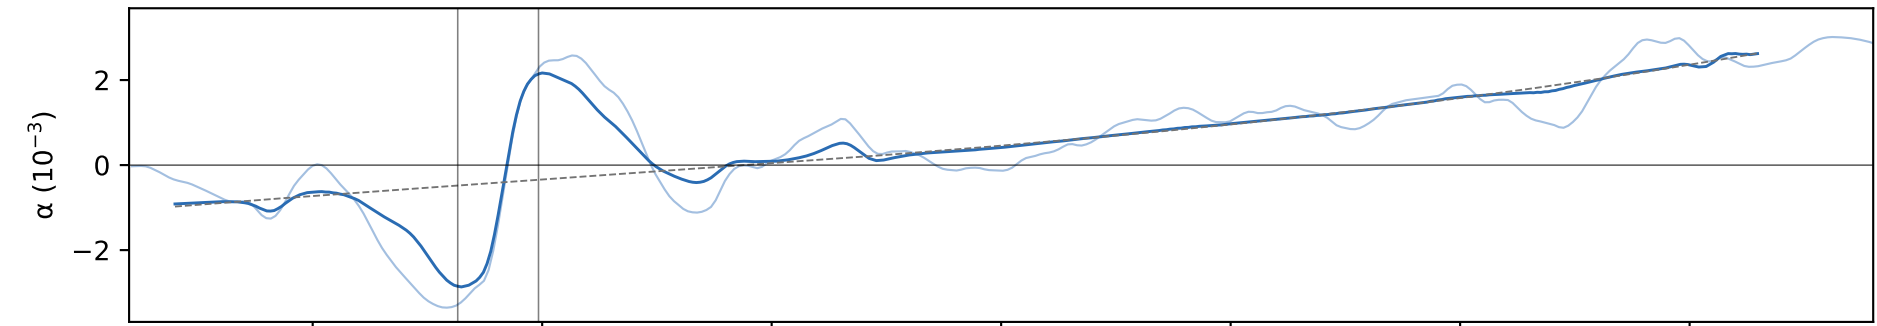


pure 23_34 L = 2.83 mm, $K_0 = 1.96\text{e-}05 \text{ A V}^{-2}$

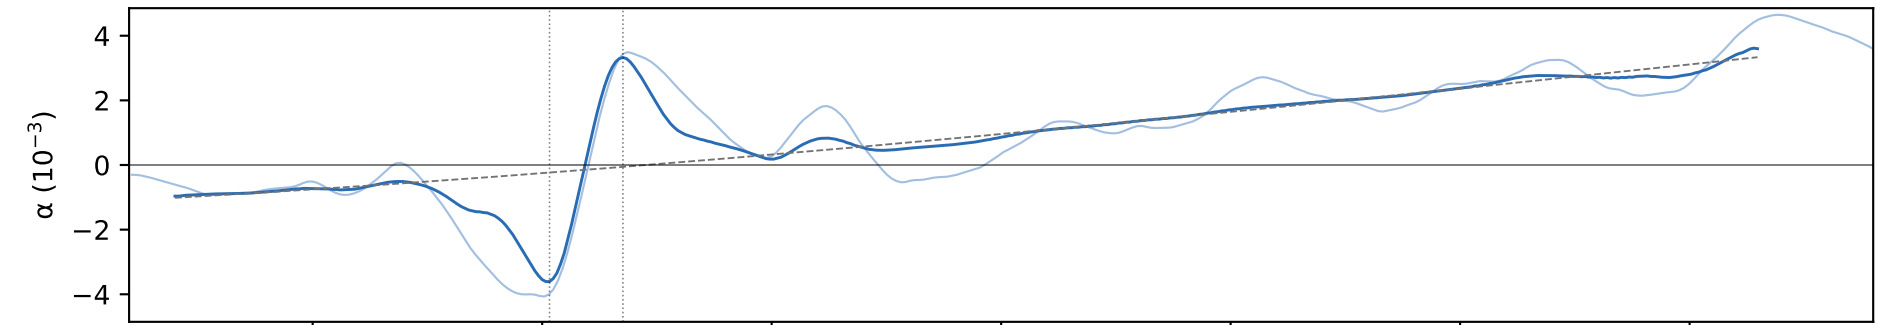


wavenumber, +V axis (cm^{-1})

pure device: $\alpha = (d^2I/dV^2)/(2K_0)$, original and denoised. Lines: solid confirmed, dashed single-half (+V), dotted tentative (+V)


pure 24_33 L = 2.83 mm, K0 = 1.96e-05 A V⁻²

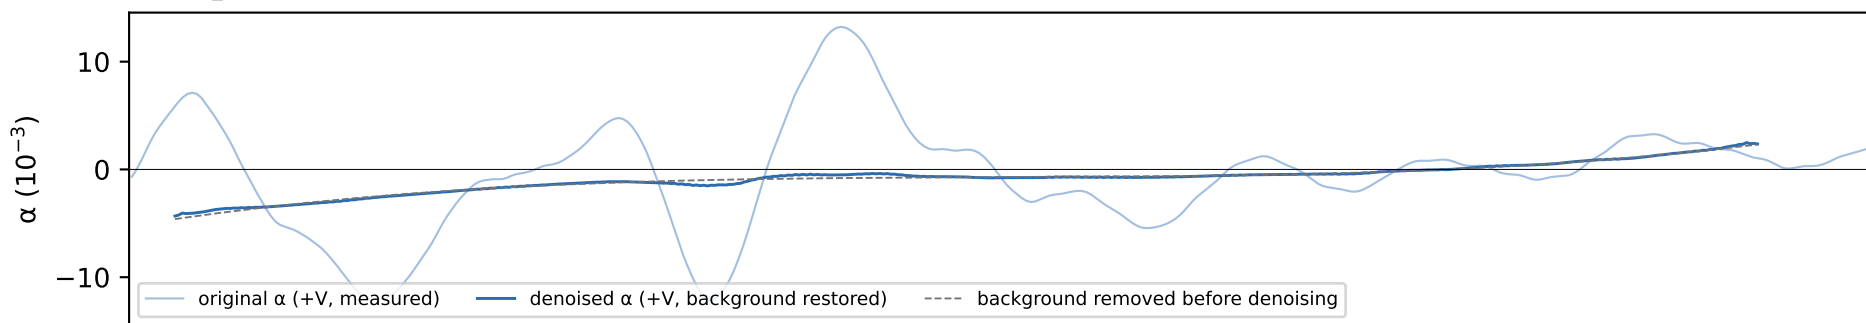


pure 24_34 L = 2.00 mm, K0 = 2.77e-05 A V⁻²

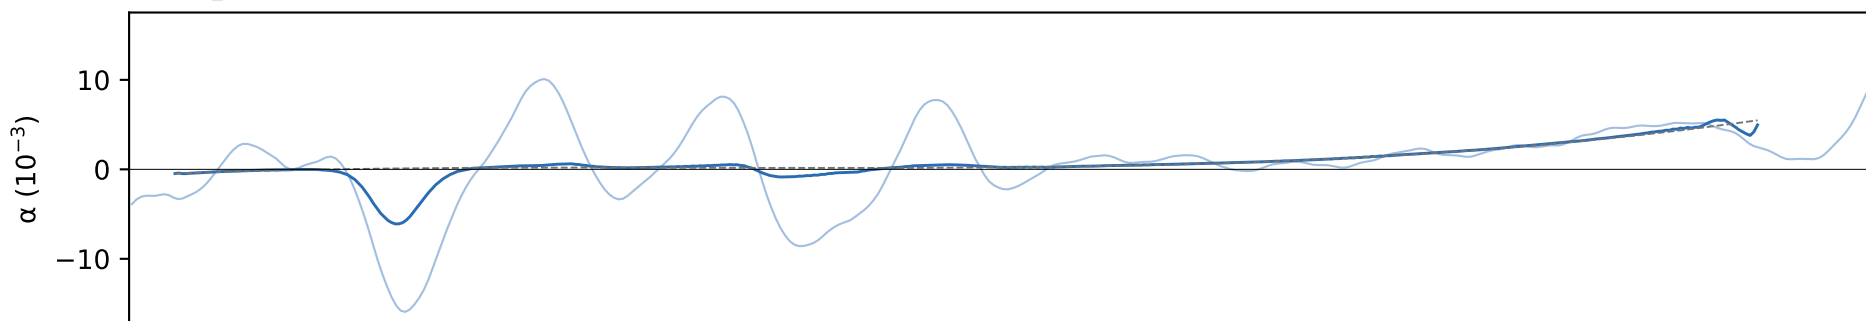


pure 31_32 L = 2.00 mm, K0 = 2.77e-05 A V⁻²

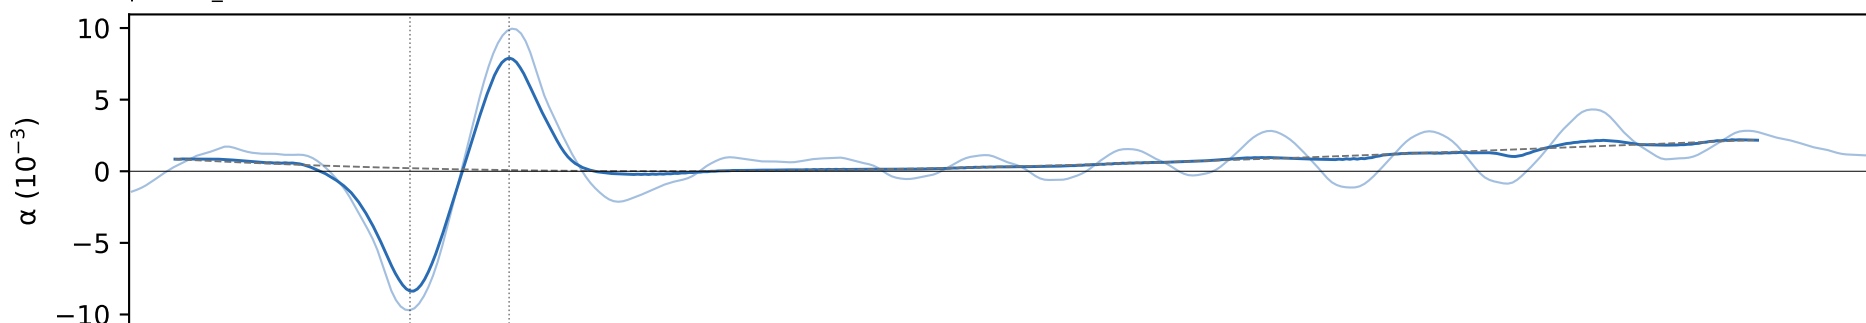


pure 31_41 L = 2.00 mm, K0 = 2.77e-05 A V⁻²

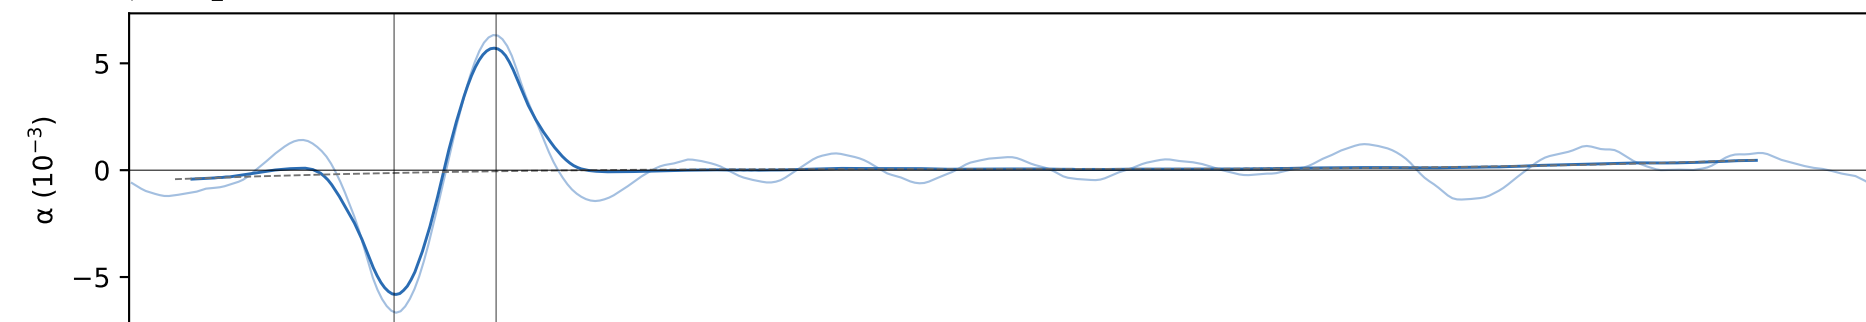

pure 31_42 L = 2.83 mm, K0 = 1.96e-05 A V⁻²

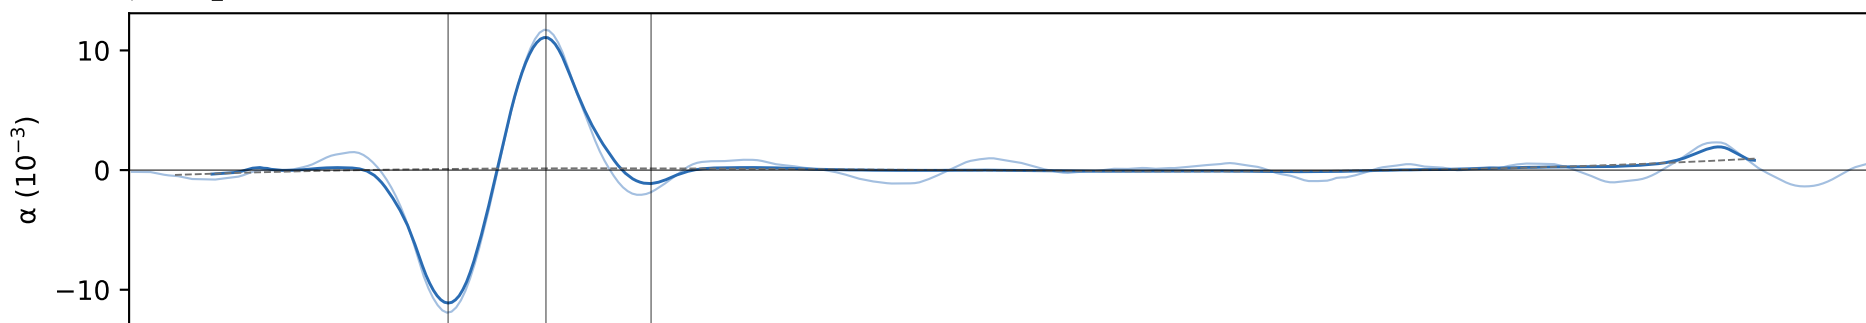


pure 32_33 L = 2.00 mm, K0 = 2.77e-05 A V⁻²

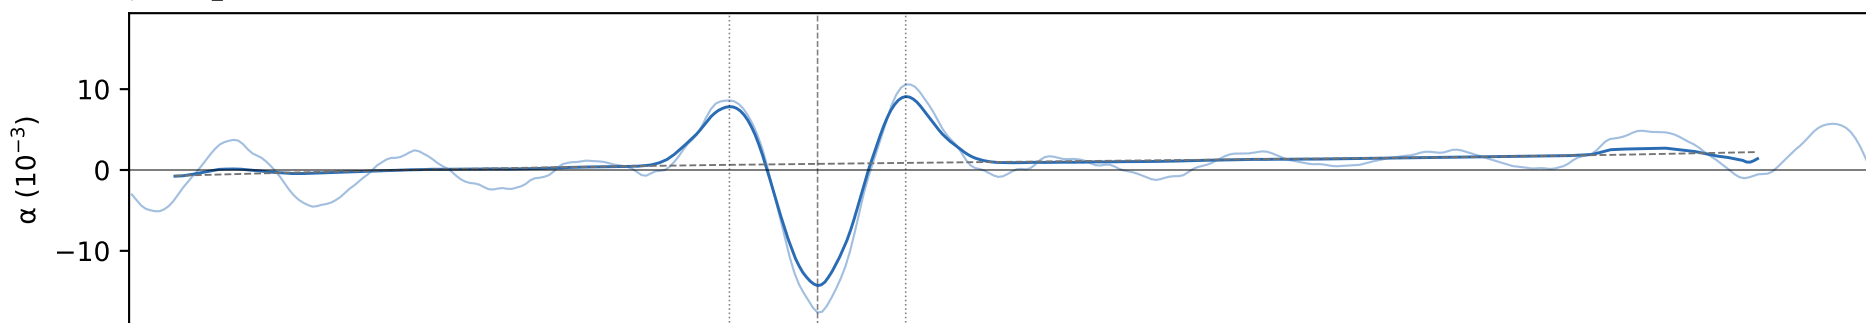


wavenumber, +V axis (cm^{-1})

pure device: $\alpha = (d^2I/dV^2)/(2K_0)$, original and denoised. Lines: solid confirmed, dashed single-half (+V), dotted tentative (+V)


pure 32_41 L = 2.83 mm, $K_0 = 1.96\text{e-}05 \text{ A V}^{-2}$

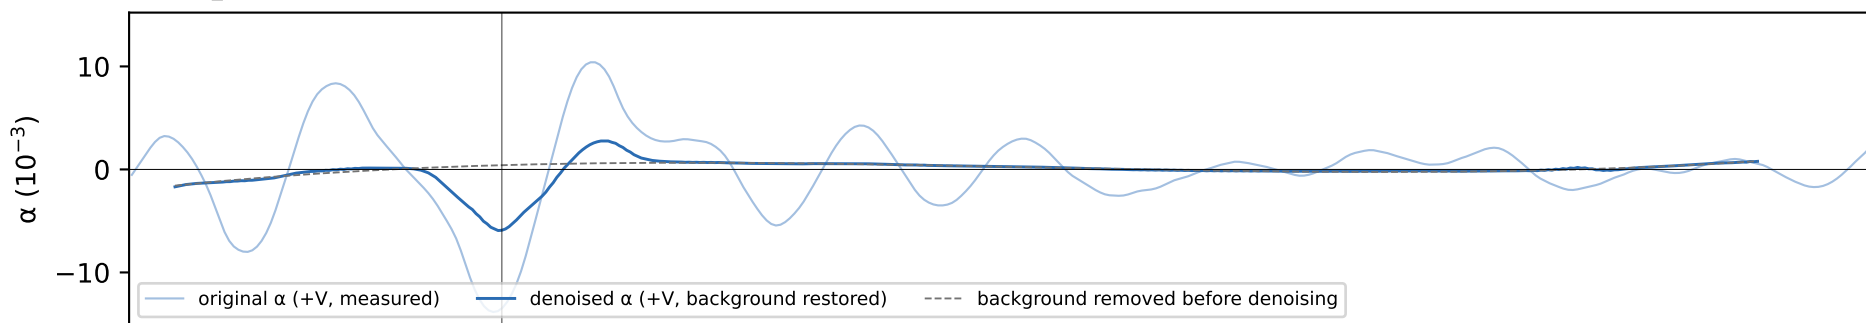


pure 32_42 L = 2.00 mm, $K_0 = 2.77\text{e-}05 \text{ A V}^{-2}$

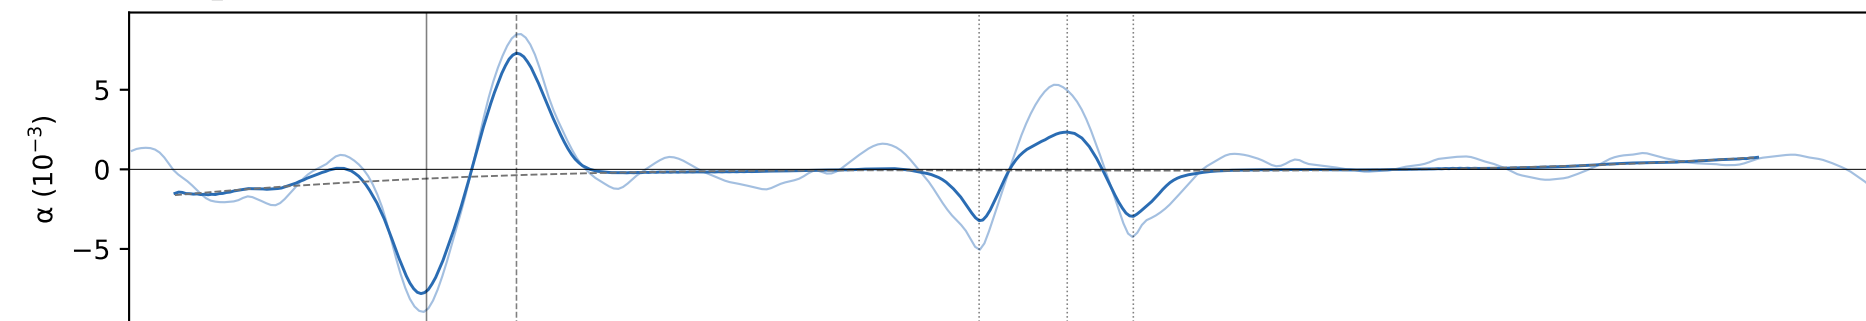


pure 32_43 L = 2.83 mm, $K_0 = 1.96\text{e-}05 \text{ A V}^{-2}$

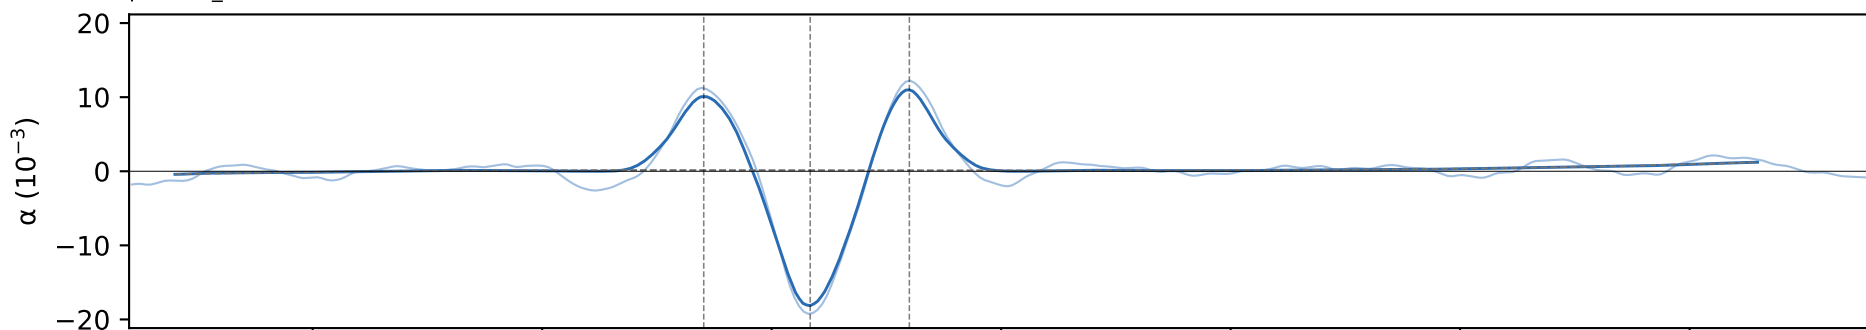


pure 33_34 L = 2.00 mm, $K_0 = 2.77\text{e-}05 \text{ A V}^{-2}$

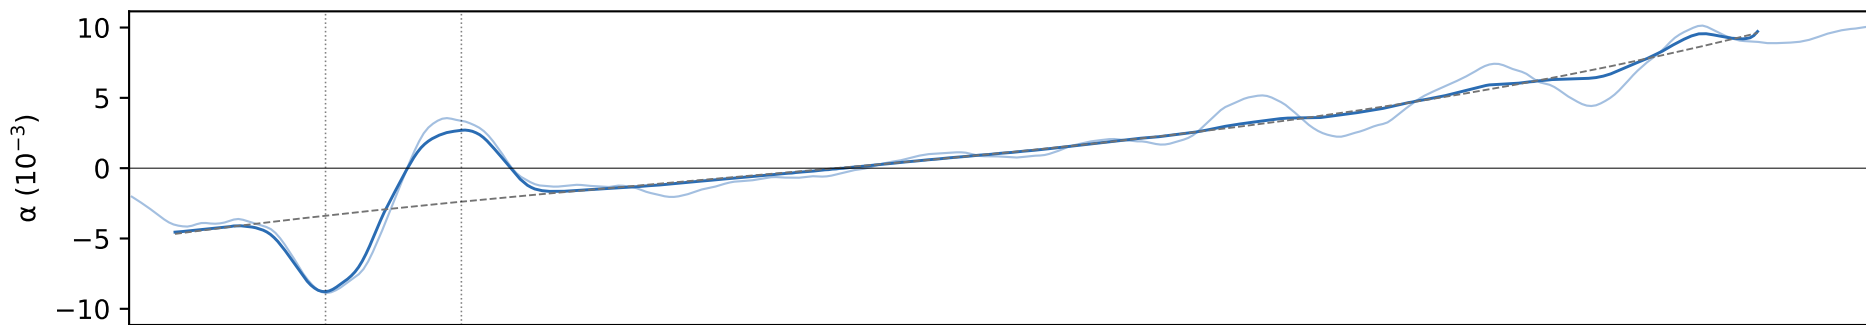

pure 33_42 L = 2.83 mm, $K_0 = 1.96\text{e-}05 \text{ A V}^{-2}$

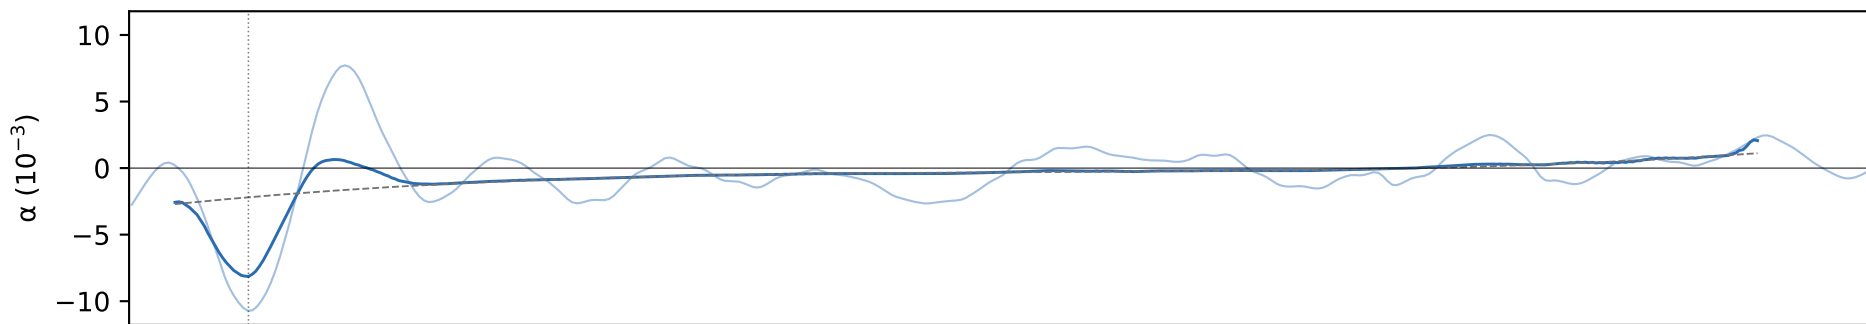


pure 33_43 L = 2.00 mm, $K_0 = 2.77\text{e-}05 \text{ A V}^{-2}$

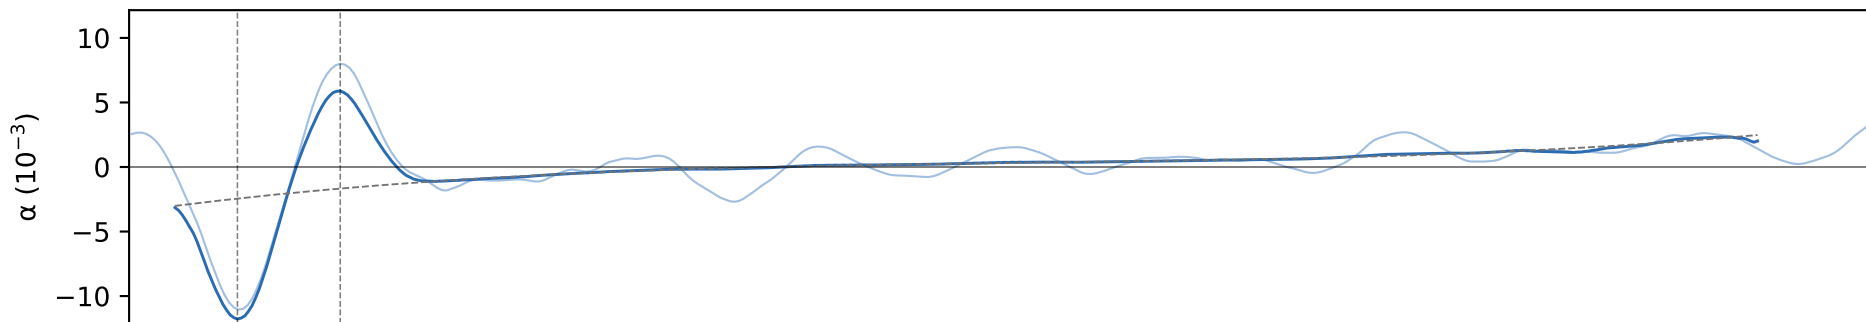


wavenumber, +V axis (cm^{-1})

pure device: $\alpha = (d^2I/dV^2)/(2K_0)$, original and denoised. Lines: solid confirmed, dashed single-half (+V), dotted tentative (+V)


pure 33_44 L = 2.83 mm, $K_0 = 1.96e-05 \text{ A V}^{-2}$

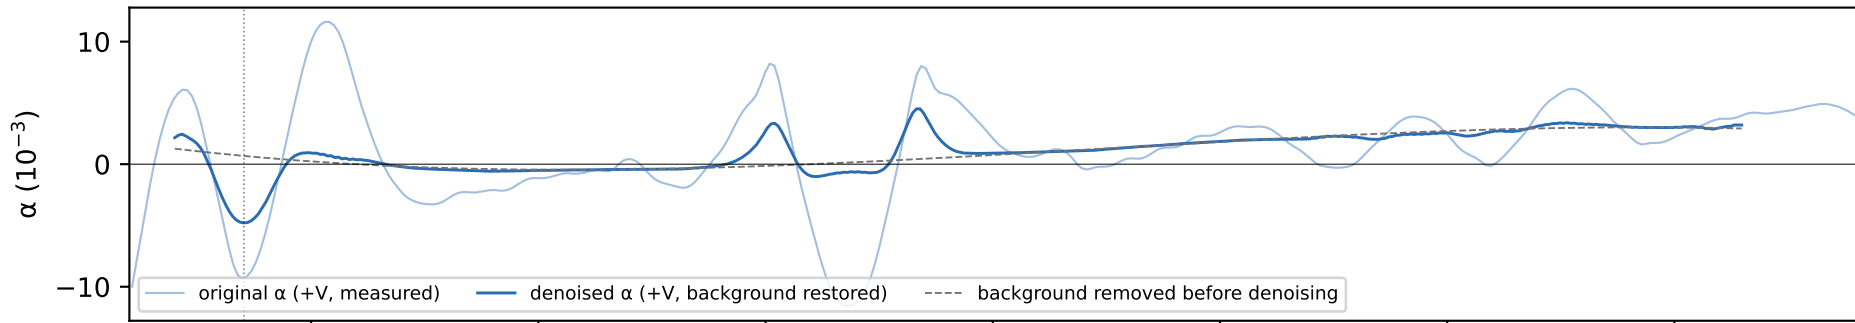


pure 34_43 L = 2.83 mm, $K_0 = 1.96e-05 \text{ A V}^{-2}$

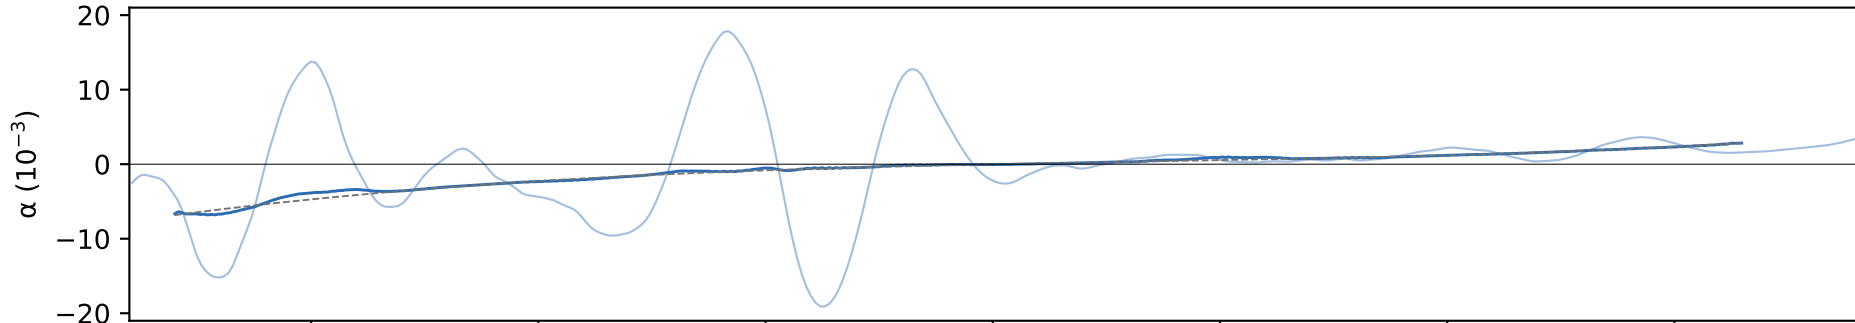


pure 34_44 L = 2.00 mm, $K_0 = 2.77e-05 \text{ A V}^{-2}$

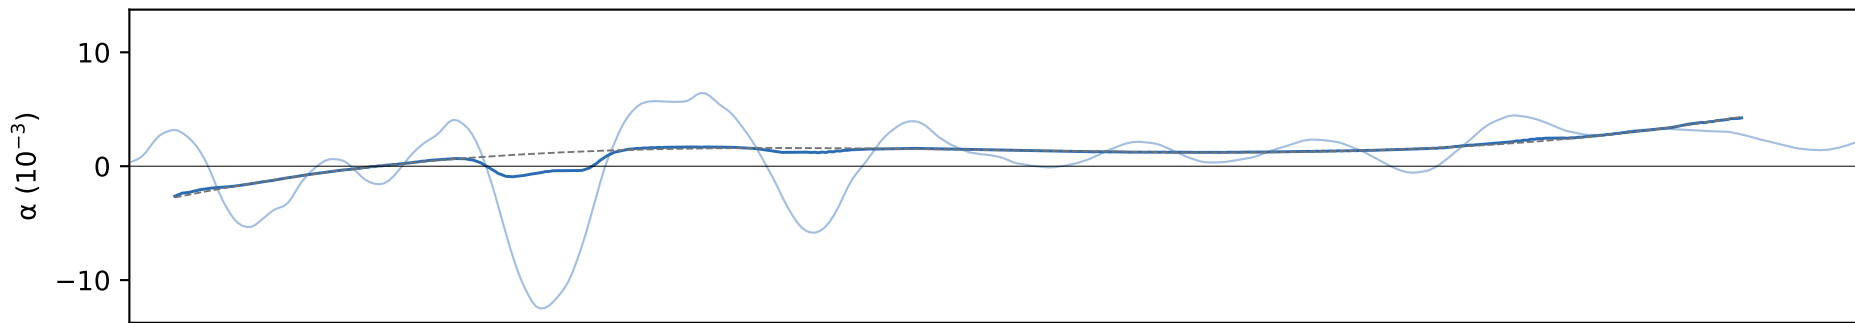


pure 41_42 L = 2.00 mm, $K_0 = 2.77e-05 \text{ A V}^{-2}$

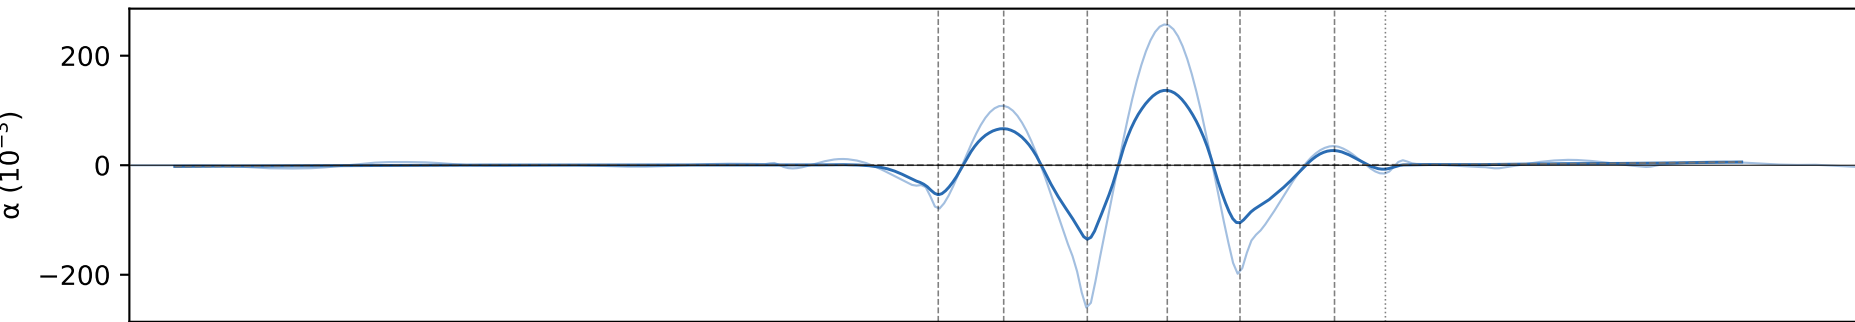

pure 41_51 L = 2.00 mm, $K_0 = 2.77e-05 \text{ A V}^{-2}$

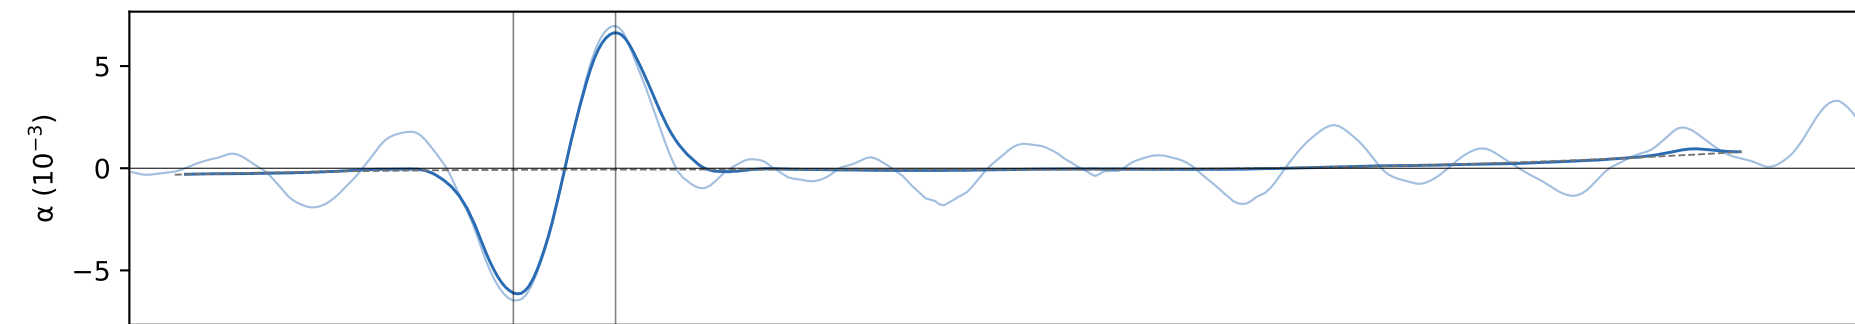


pure 41_52 L = 2.83 mm, $K_0 = 1.96e-05 \text{ A V}^{-2}$

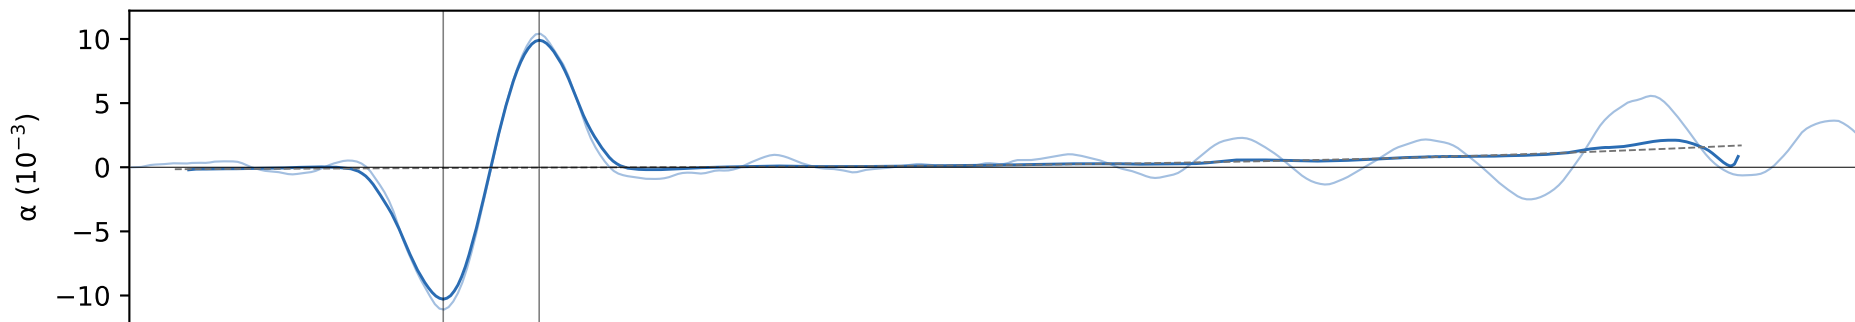


wavenumber, +V axis (cm^{-1})

pure device: $\alpha = (d^2I/dV^2)/(2K_0)$, original and denoised. Lines: solid confirmed, dashed single-half (+V), dotted tentative (+V)


pure 42_43 L = 2.00 mm, $K_0 = 2.77\text{e-}05 \text{ A V}^{-2}$

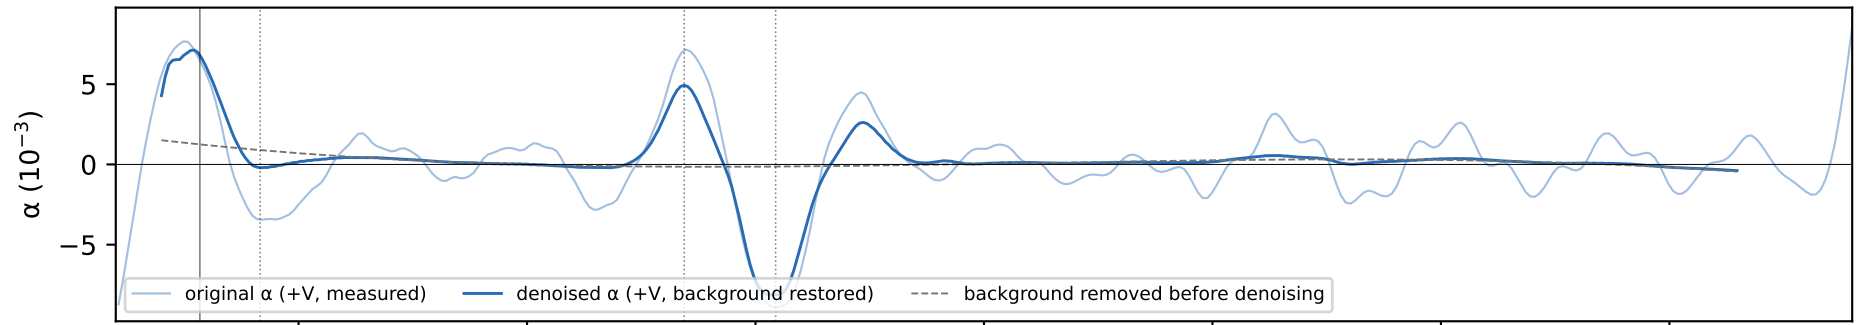


pure 42_51 L = 2.83 mm, $K_0 = 1.96\text{e-}05 \text{ A V}^{-2}$

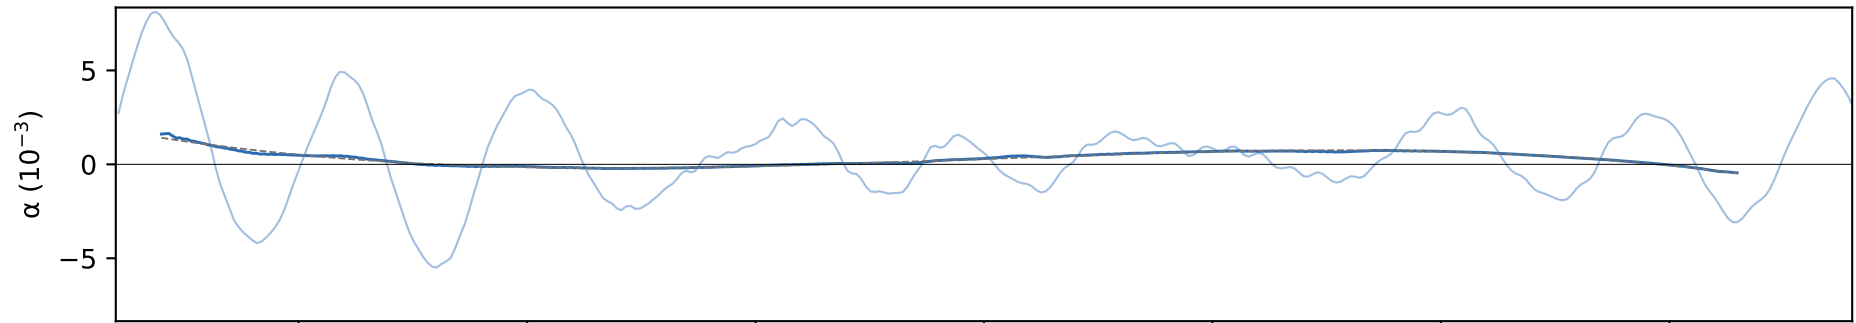


pure 42_52 L = 2.00 mm, $K_0 = 2.77\text{e-}05 \text{ A V}^{-2}$

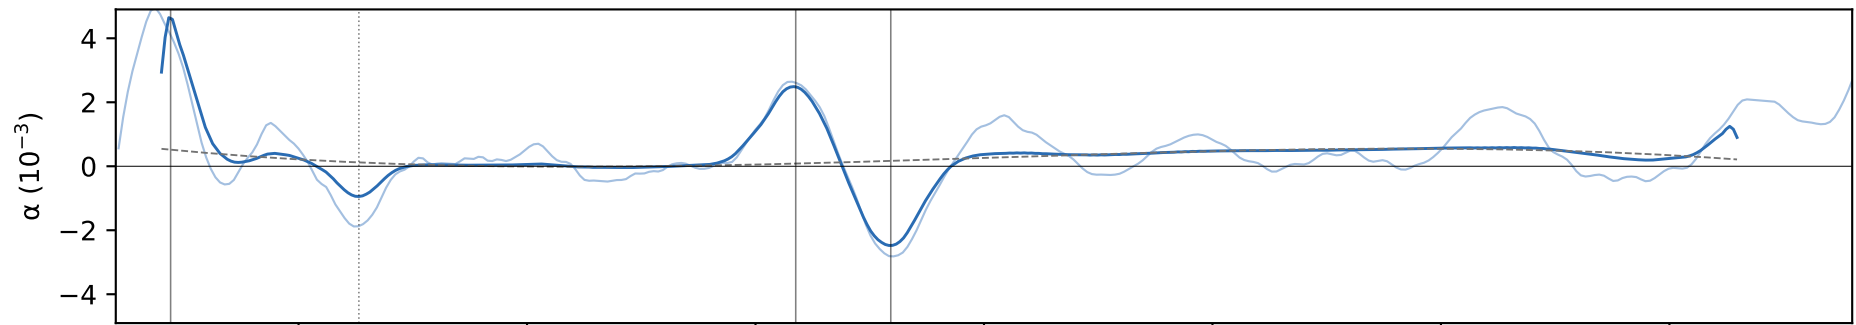


pure 42_53 L = 2.83 mm, $K_0 = 1.96\text{e-}05 \text{ A V}^{-2}$

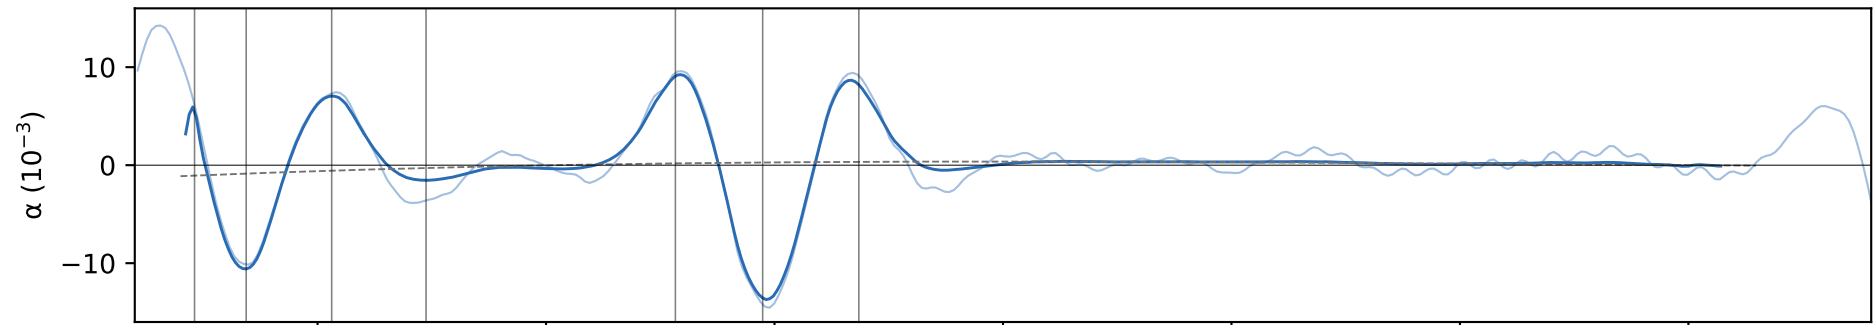

pure 43_44 L = 2.00 mm, $K_0 = 2.77\text{e-}05 \text{ A V}^{-2}$

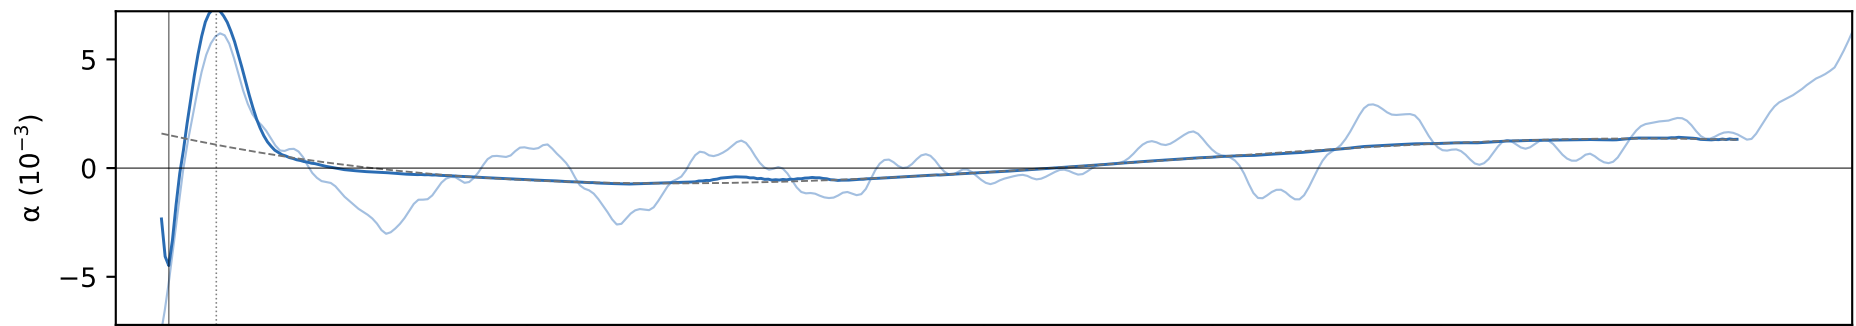


pure 43_52 L = 2.83 mm, $K_0 = 1.96\text{e-}05 \text{ A V}^{-2}$

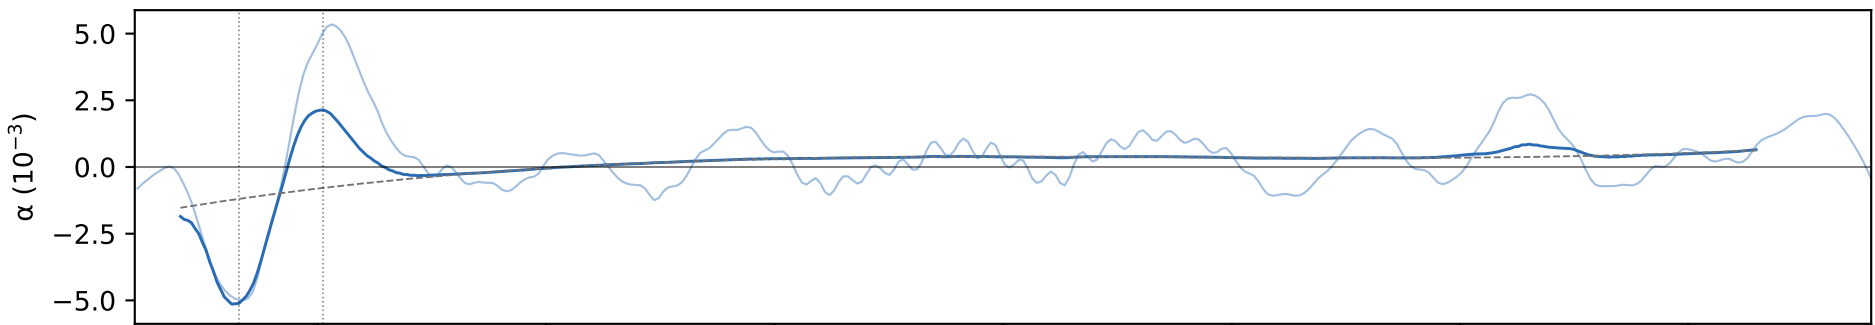


wavenumber, +V axis (cm^{-1})

pure device: $\alpha = (d^2I/dV^2)/(2K_0)$, original and denoised. Lines: solid confirmed, dashed single-half (+V), dotted tentative (+V)


pure 43_53 L = 2.00 mm, K0 = 2.77e-05 A V⁻²

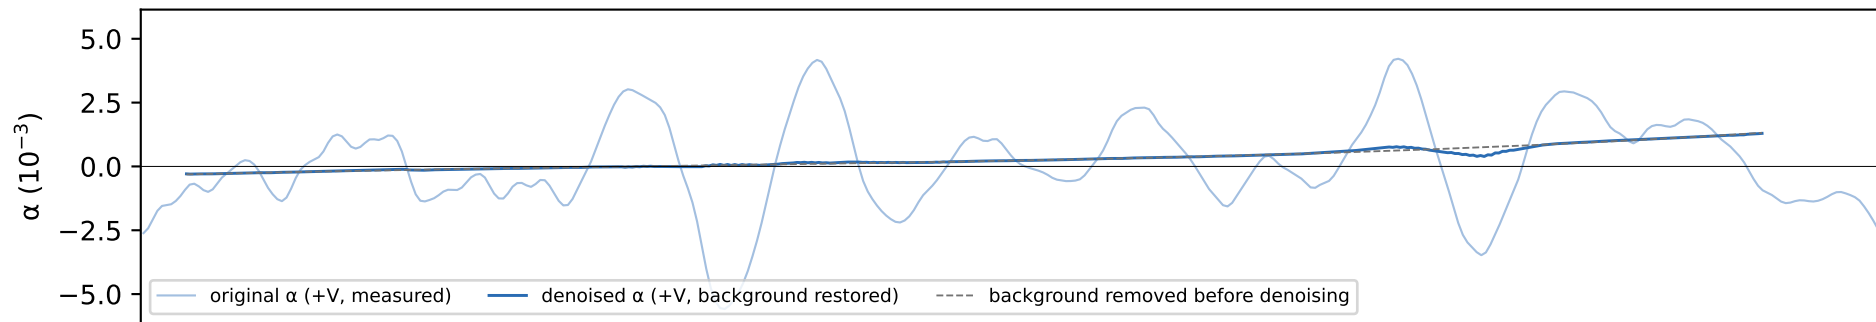


pure 43_54 L = 2.83 mm, K0 = 1.96e-05 A V⁻²

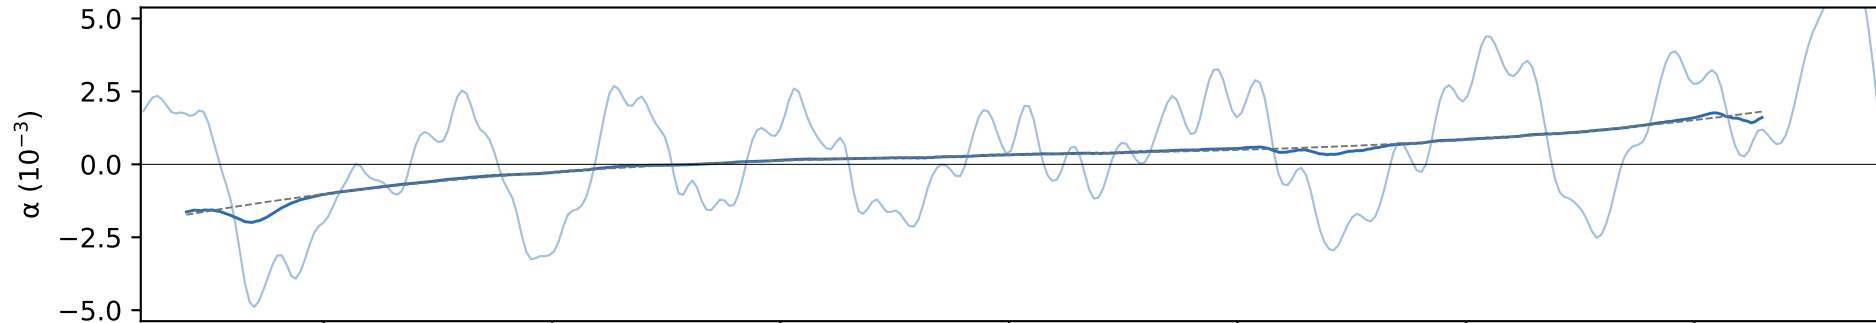


pure 44_53 L = 2.83 mm, K0 = 1.96e-05 A V⁻²

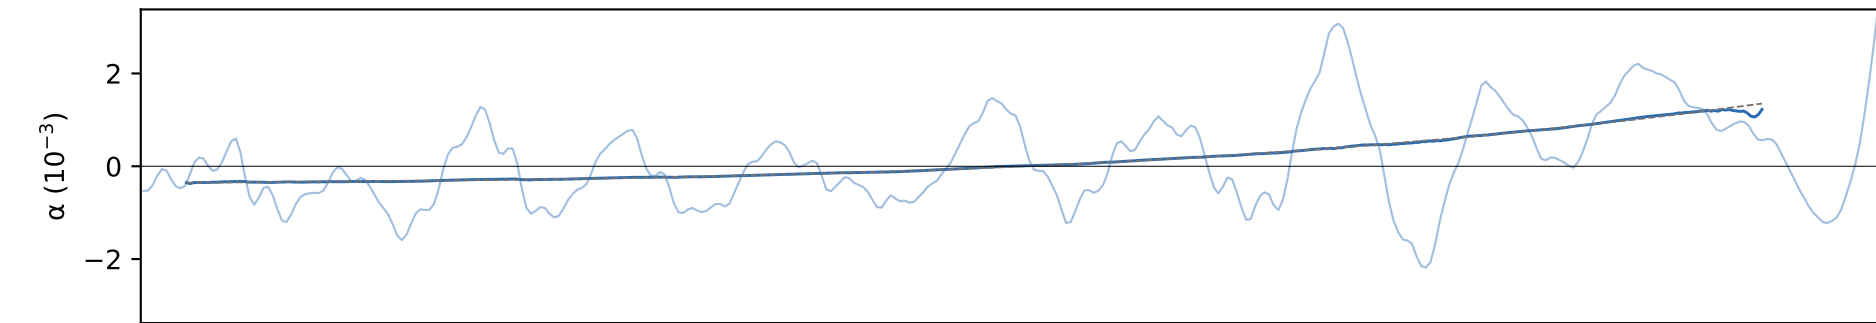


pure 44_54 L = 2.00 mm, K0 = 2.77e-05 A V⁻²

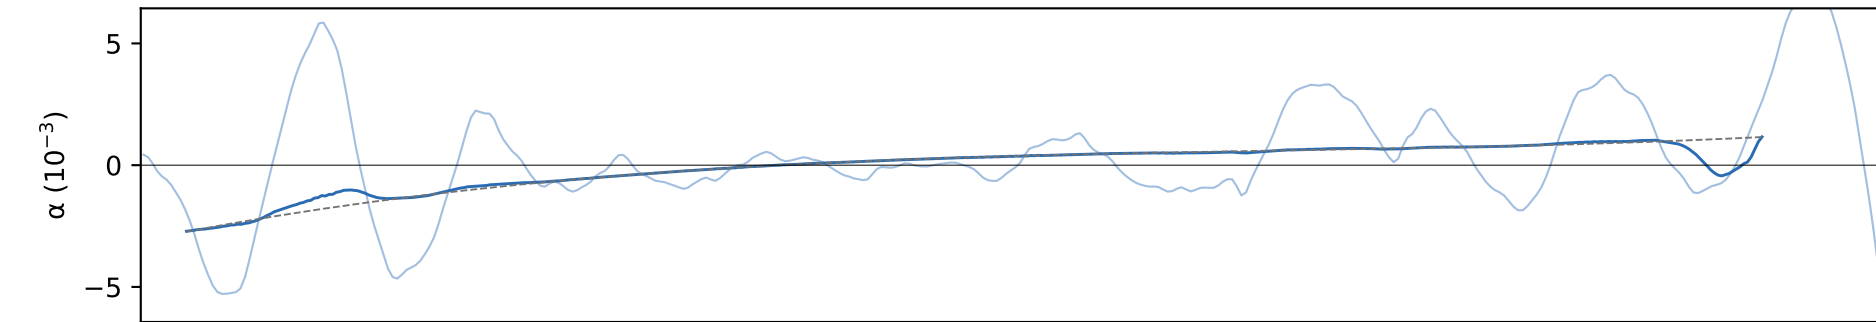

pure 51_52 L = 2.00 mm, K0 = 2.77e-05 A V⁻²

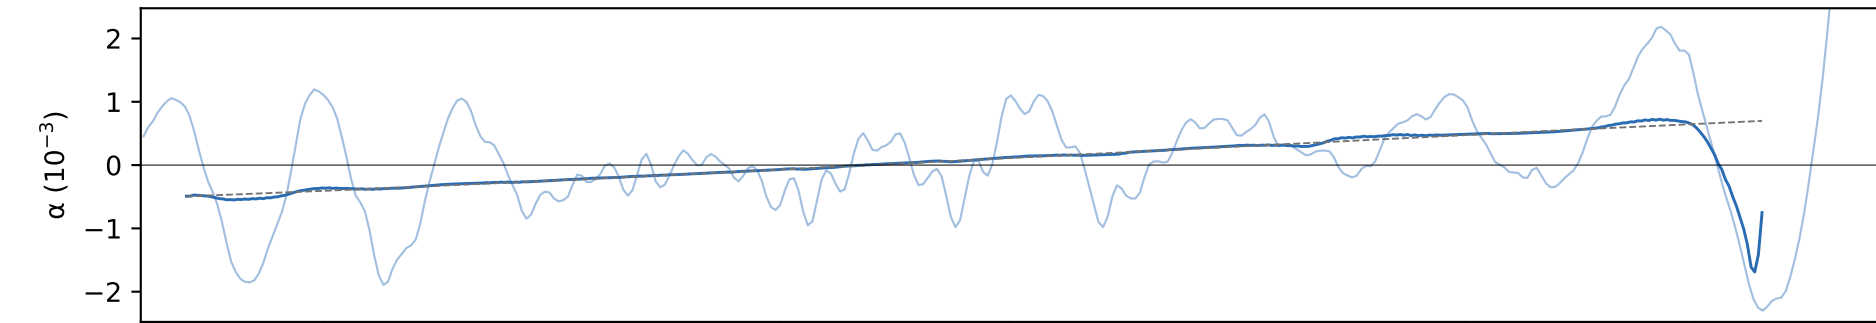

pure 52_53 L = 2.00 mm, K0 = 2.77e-05 A V⁻²

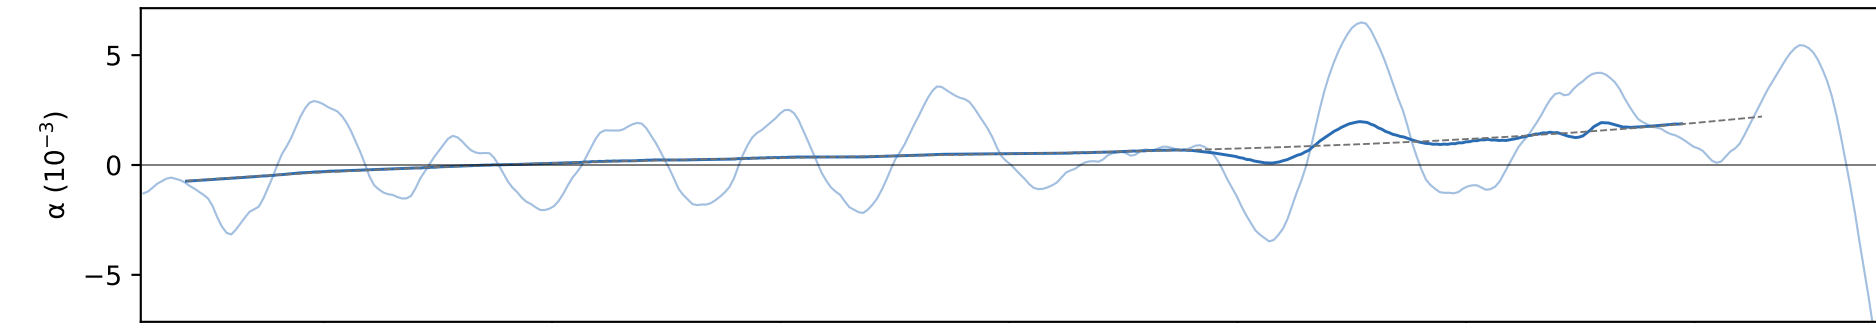

wavenumber, +V axis (cm⁻¹)

pure device: $\alpha = (d^2I/dV^2)/(2K_0)$, original and denoised. Lines: solid confirmed, dashed single-half (+V), dotted tentative (+V)

pure 53_54 L = 2.00 mm, K0 = 2.77e-05 A V⁻²

