



xarvio®
Digital Farming
Solutions

powered by BASF



xarvio®
CONNECT 2.0

SCAN CODE
TO ACCESS
KNOWLEDGE
BASE



xarvio® CONNECT 2.0

01 Quick Start Manual



13 Schnellstartanleitung



26 Manuel d'utilisation



39 Manual de Inicio Rápido



52 クイック・スタート・マニュアル




65 Manual de início Rápido



78 Lorem ipsum



Quick Start Manual

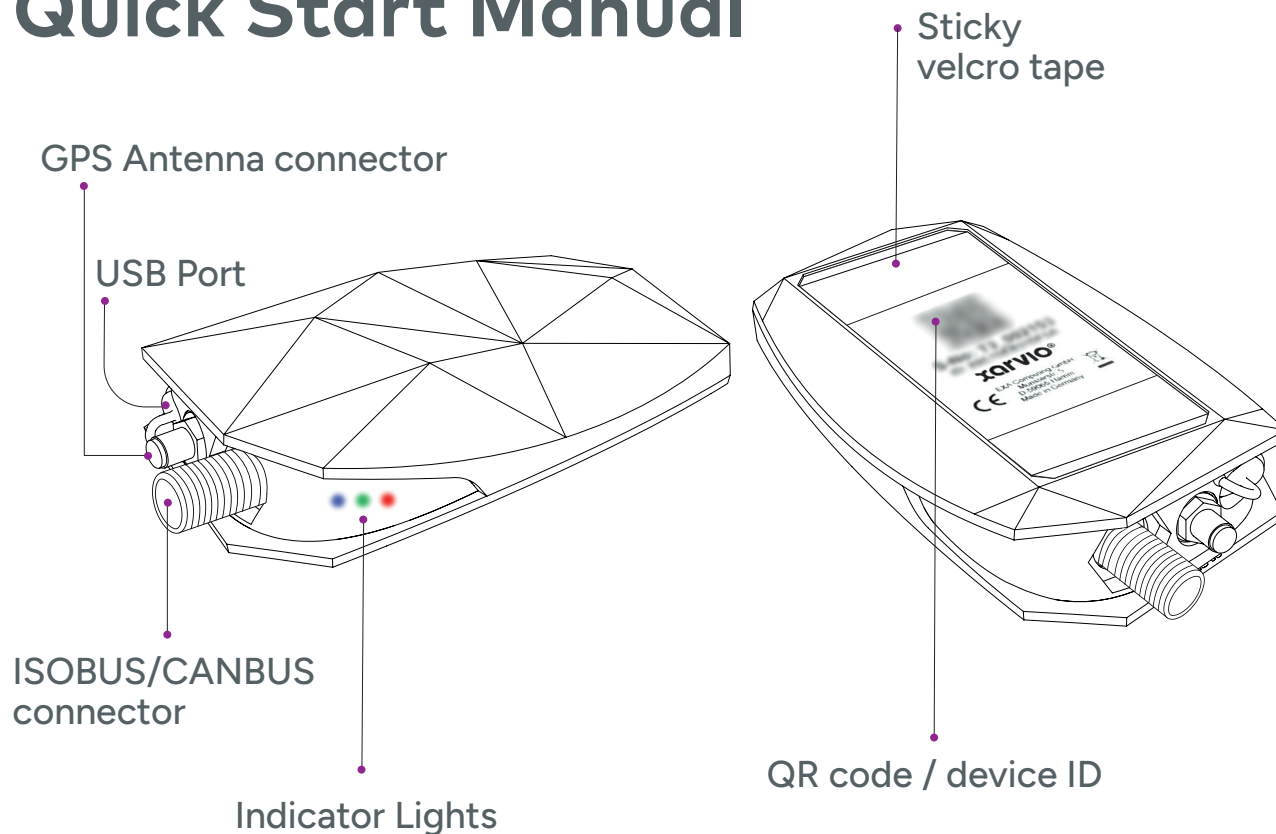


xarvio® CONNECT 2.0

- **GPS ANTENNA CONNECTOR:** Screw the GPS antenna onto the antenna connector on the device. The GPS Antenna is used as a backup when there is no GPS signal on the ISOBUS/CANBUS.
- **USB port:** The USB port is used for data exchange with the terminal.
- **ISOBUS/CANBUS connector:** The ISOBUS/CANBUS connection is used to capture agronomical (application/seeding rates, yield) and non- agronomical (location, fuel consumption, driving speed) data from the machines. The ISOBUS/CANBUS cable is also used to power the device.
- **Indicator lights:** The indicator lights give information about the status of the device (see page 11).
- **QR code / device id:** Use the device ID to register the device to your xarvio® FIELD MANAGER account.
- **sticky velcro tape:** You can use the sticky velcro tape to secure the device in the cabin.


Register xarvio® CONNECT 2.0 in your xarvio® FIELD MANAGER account

1. Log into your xarvio® FIELD MANAGER account.
2. Go to user settings.
3. Go to the xarvio® CONNECT section.
4. Enter the device ID and click on “Add device”. You can find the device ID on the back of your xarvio® CONNECT 2.0 device. The device ID consists of 13 characters and starts with an X.
5. Enter a name for your device.
6. Enter the details of the machine on which you want to use your xarvio® CONNECT 2.0: Type, Manufacturer, Model. You can later change the machine details if you want to use xarvio® CONNECT 2.0 on a different machine.

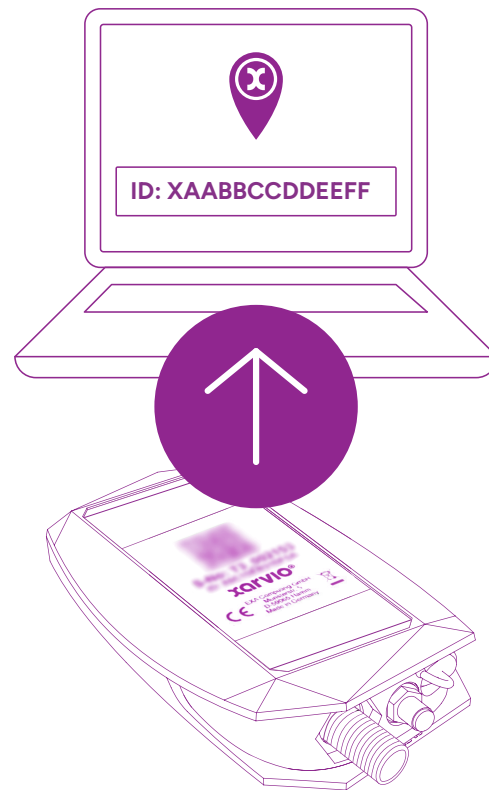


Install xarvio® CONNECT 2.0 on your machine

1. Screw the GPS antenna onto the antenna connector on the xarvio® CONNECT 2.0.
2. Screw the ISOBUS/CANBUS cable onto ISOBUS/CANBUS connector on the xarvio® CONNECT 2.0.
3. Plug the Mirco-USB plug of the USB cable in the xarvio® CONNECT 2.0.
4. Connect the ISOBUS/CANBUS cable to the ISOBUS/CANBUS connector on your machine. Each brand and model of machine may require a different type of cable. If your cable does not match your machine please contact xarvio® customer support.
5. Connect the USB cable to the USB plug on your terminal.
6. Use the velcro stickers or zip ties to secure your xarvio® CONNECT 2.0 inside the cabin.

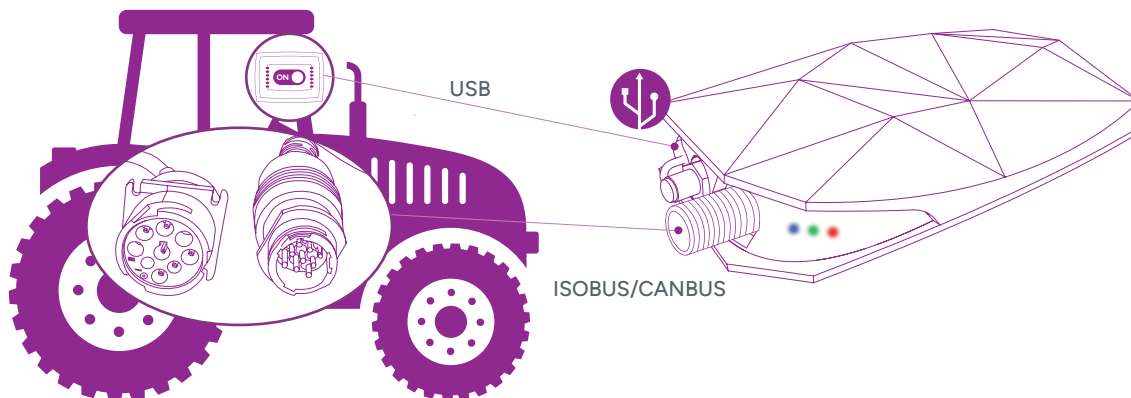


Send prescription maps from xarvio® FIELD MANAGER to your terminal

1. Log into your xarvio® FIELD MANAGER account.
2. Go to the Tasks section.
3. Select the tasks that you want to send to your terminal.
4. Click on Export. Then click on xarvio® CONNECT.
5. Select the name of the xarvio® CONNECT device from the list.
6. Select the file type and terminal model.
7. Click on "Send".

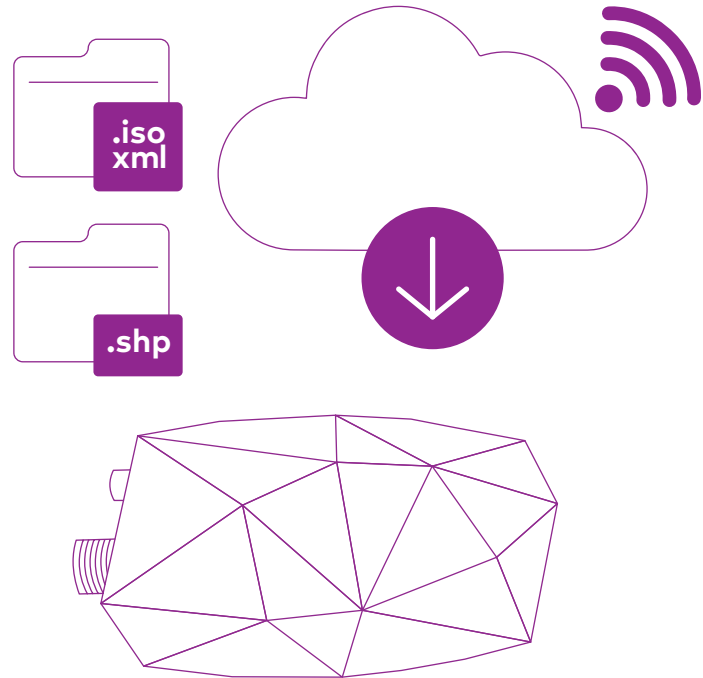

Use prescription maps from xarvio® CONNECT 2.0 on your terminal


1. Start your machine and turn on your terminal.
2. Wait until xarvio® CONNECT 2.0 is fully booted. On some terminals an indicator will show up that a USB Stick is connected once xarvio® CONNECT 2.0 is fully booted.
3. Use your terminal to import files from a USB stick. xarvio® CONNECT 2.0 acts as a USB stick.
4. Use your terminal to start the imported task/prescription map.
5. Perform the application.

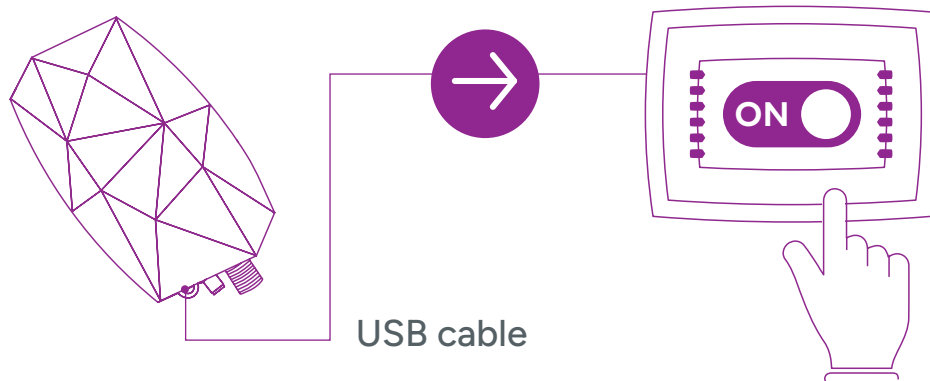


Document your work with xarvio® CONNECT 2.0

There are two ways xarvio® CONNECT 2.0 can help you document your field work:

1. Transfer documentation data from your terminal to your xarvio® FIELD MANAGER account (see page 8).

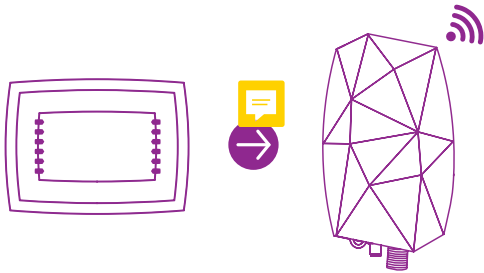

2. Automatic documentation (see page 9).

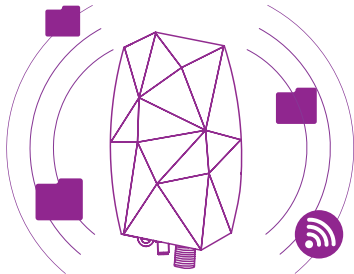

1. Transfer documentation data from your terminal to your xarvio® FIELD MANAGER account

With xarvio® CONNECT 2.0 you can wirelessly transfer documentation data from your terminal to your xarvio® FIELD MANAGER account


1. Connect the USB cable from xarvio® CONNECT 2.0 to the USB port of your terminal.
2. Use the USB export function of your terminal to export the documentation data directly to xarvio® CONNECT 2.0.
3. Wait until the export is completed.
4. The wireless transfer will begin on the next occasion when the USB cable is disconnected from the display. To start the transfer either unplug the USB cable from the terminal or shut down the terminal (while keeping xarvio® CONNECT 2.0 powered).
5. Active wireless data transfer is indicated by a purple blinking LED (see page 11).
6. Depending on the amount of data and quality of the **cell** network connection the transfer will take some time (If the **cell** network connection is interrupted the transmission will be resumed once the connection is restored).

This feature is available for most displays and file formats (including, but not limited to: John Deere, Case, NewHolland, AgLeader, Kinze, Topcon, PrecisionPlanting, any ISOXML based terminal, ...).

2. Automatic documentation

xarvio® CONNECT 2.0 provides automatic documentation feature, which means:

- Wireless transfer of field specific documentation of applications, seeding and harvesting (via mobile network).
- Including agronomic data and non agronomic data (yield, moisture, applied rates, seeding rates, driving speed, fuel consumption).
- No user interaction is required.

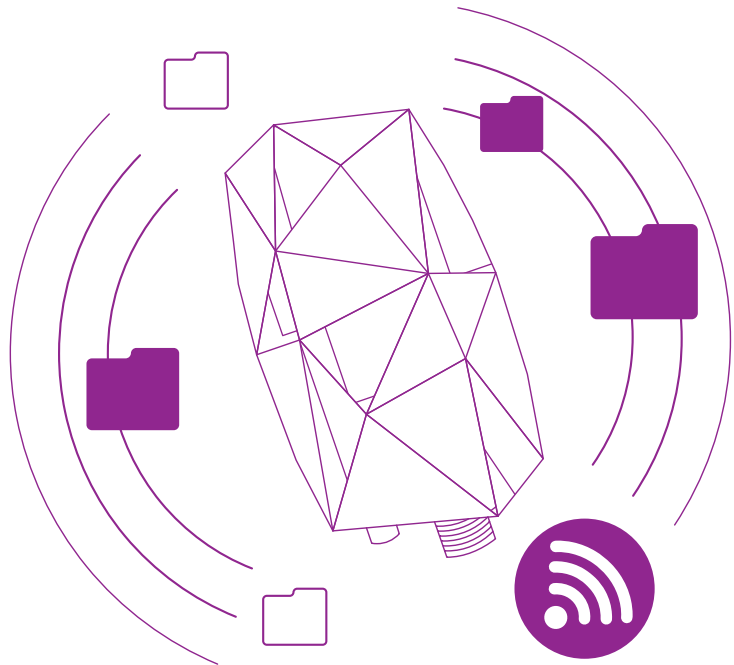

Good to know / Tips / FAQ


- Place xarvio® CONNECT 2.0 close to a window inside your cabin to ensure **cell** network and GPS have a good connection.
- xarvio® CONNECT 2.0 transfers data via **cell** network. In areas with no reception xarvio® CONNECT 2.0 cannot receive any prescription maps or send data.
- xarvio® CONNECT 2.0 can be restarted by disconnecting the ISOBUS/CANBUS cable.
- If the USB storage is not showing up in the terminal when the USB cable is connected, make sure each side of the USB cable is fully plugged in and restart the xarvio® CONNECT 2.0.

US Hotline:


- +1 800-365-5006
- Monday - Friday: 8:00 am – 5:00 pm (CST)
- E-mail: usa@xarvio.info

Canada Hotline:

- +1 833-600-0691
- Monday - Friday: 8:30 am – 4:30 pm (MST)
- E-mail: canada@xarvio.info

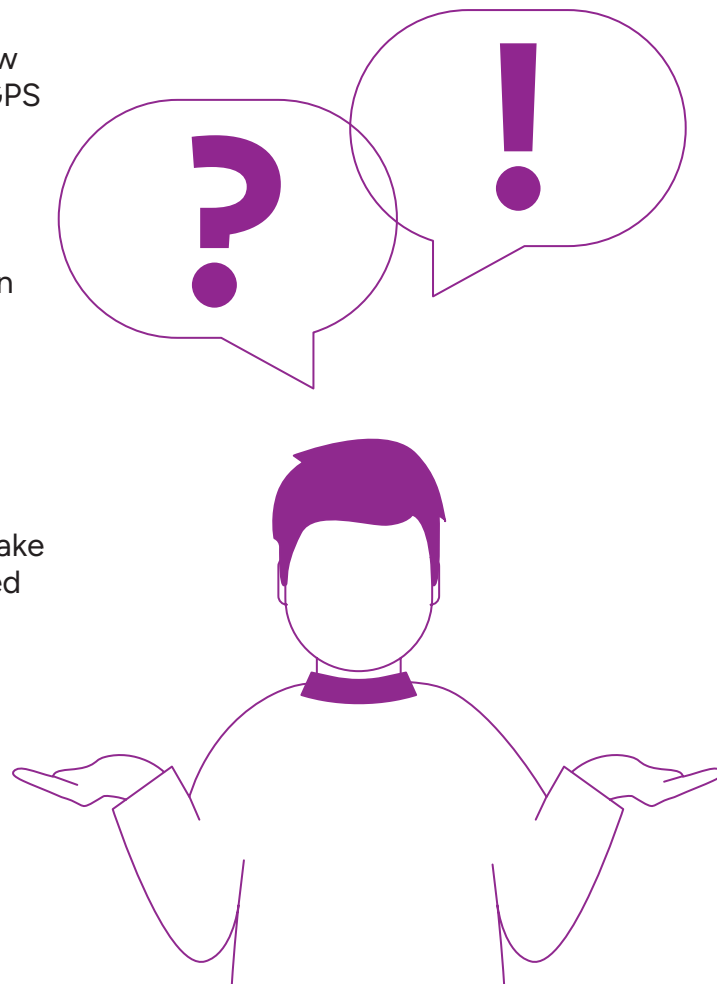

Meaning of Indicator lights

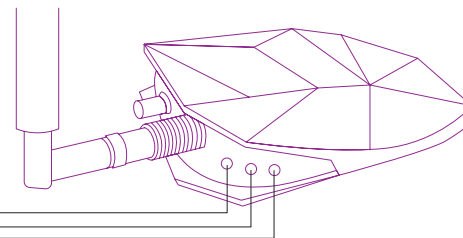

LED 3	LED 2	LED 1	FUNCTION
Slowly flashing blue	Green	Green	Device Registration and/or setup not completed. Please go to your xarvio® FIELD MANAGER account and register your device and enter the machine details in the settings.
Off	Lights up green briefly and then goes out	Off	Power is on, but machine is inactive. xarvio® CONNECT 2.0 will go into sleep mode and will wake up as soon as the machine becomes active.
Flashing red	Green	Green	xarvio® CONNECT 2.0 is fully booted, but does not get any GNSS position.
Green	Green	Green	xarvio® CONNECT 2.0 is fully booted and working.
Flashes green three times	Green	Green	New prescription map from xarvio® FIELD MANAGER was received.
Flashing white	Green	Green	New Firmware is being installed. xarvio® CONNECT 2.0 will return to normal operation once the update is finished. This may take a few minutes.
Flashes purple	Green	Green	Documentation data is in the process of wireless upload to xarvio® FIELD MANAGER.



xarvio®
Digital Farming
Solutions

powered by BASF