



1. Description

1.1. Project

Project Name	nucleo_F030R8_TFT_CubeMX
Board Name	NUCLEO-F030R8
Generated with:	STM32CubeMX 6.2.1
Date	04/24/2021


1.2. MCU

MCU Series	STM32F0
MCU Line	STM32F0x0 Value Line
MCU name	STM32F030R8Tx
MCU Package	LQFP64
MCU Pin number	64

1.3. Core(s) information

Core(s)	Arm Cortex-M0
---------	---------------

2. Pinout Configuration

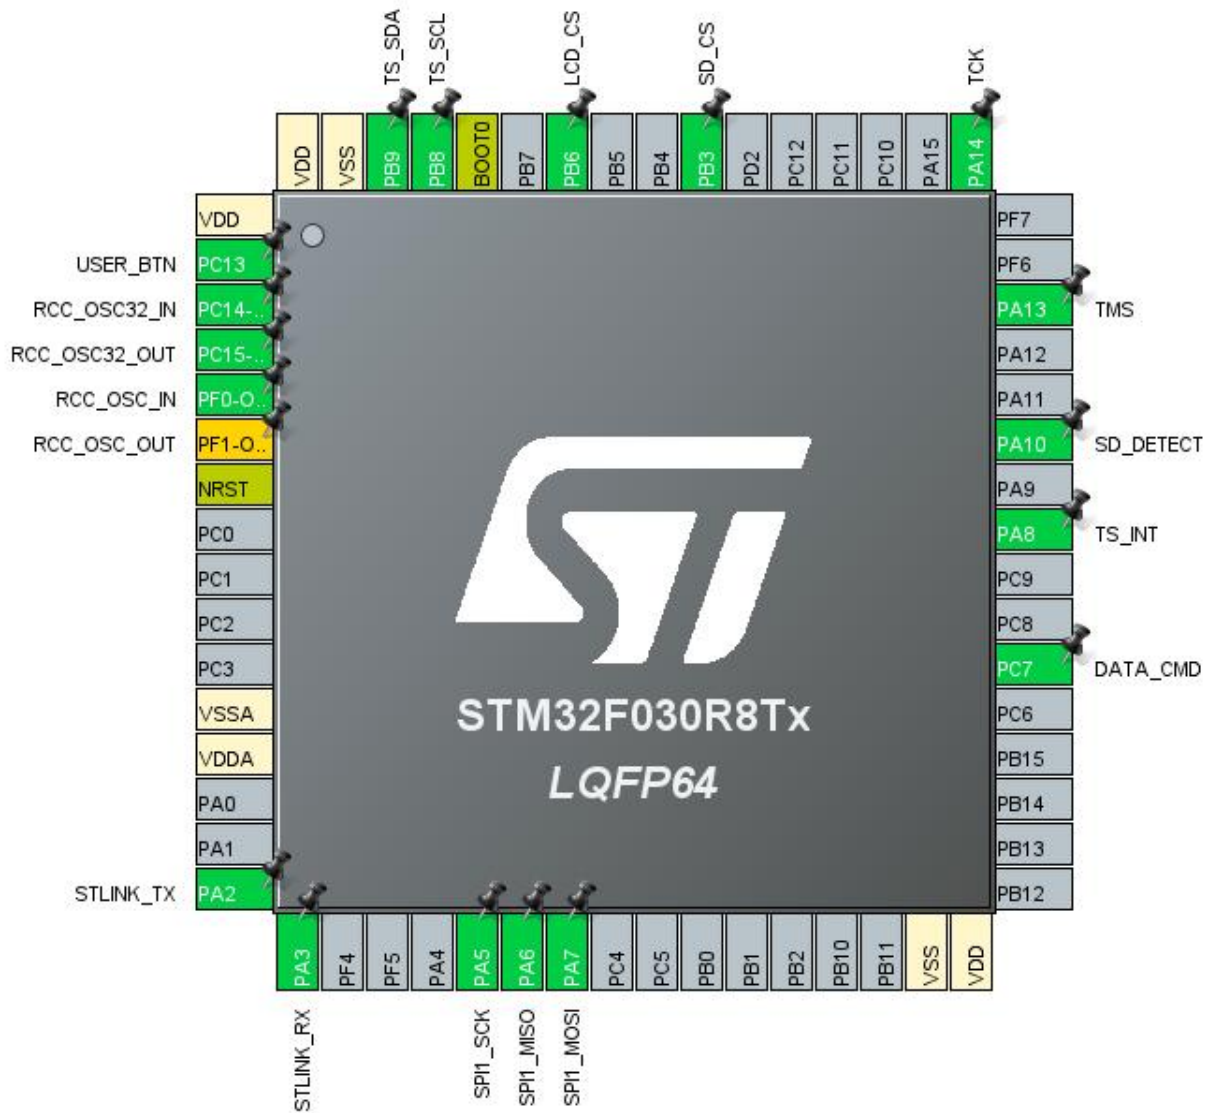


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VDD	Power		
2	PC13 *	I/O	GPIO_Input	USER_BTN
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PF0-OSC_IN	I/O	RCC_OSC_IN	
6	PF1-OSC_OUT **	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
16	PA2	I/O	USART2_TX	STLINK_TX
17	PA3	I/O	USART2_RX	STLINK_RX
21	PA5	I/O	SPI1_SCK	SPI1_SCK
22	PA6	I/O	SPI1_MISO	SPI1_MISO
23	PA7	I/O	SPI1_MOSI	SPI1_MOSI
31	VSS	Power		
32	VDD	Power		
38	PC7 *	I/O	GPIO_Output	DATA_CMD
41	PA8 *	I/O	GPIO_Input	TS_INT
43	PA10 *	I/O	GPIO_Input	SD_DETECT
46	PA13	I/O	SYS_SWDIO	TMS
49	PA14	I/O	SYS_SWCLK	TCK
55	PB3 *	I/O	GPIO_Output	SD_CS
58	PB6 *	I/O	GPIO_Output	LCD_CS
60	BOOT0	Boot		
61	PB8	I/O	I2C1_SCL	TS_SCL
62	PB9	I/O	I2C1_SDA	TS_SDA
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

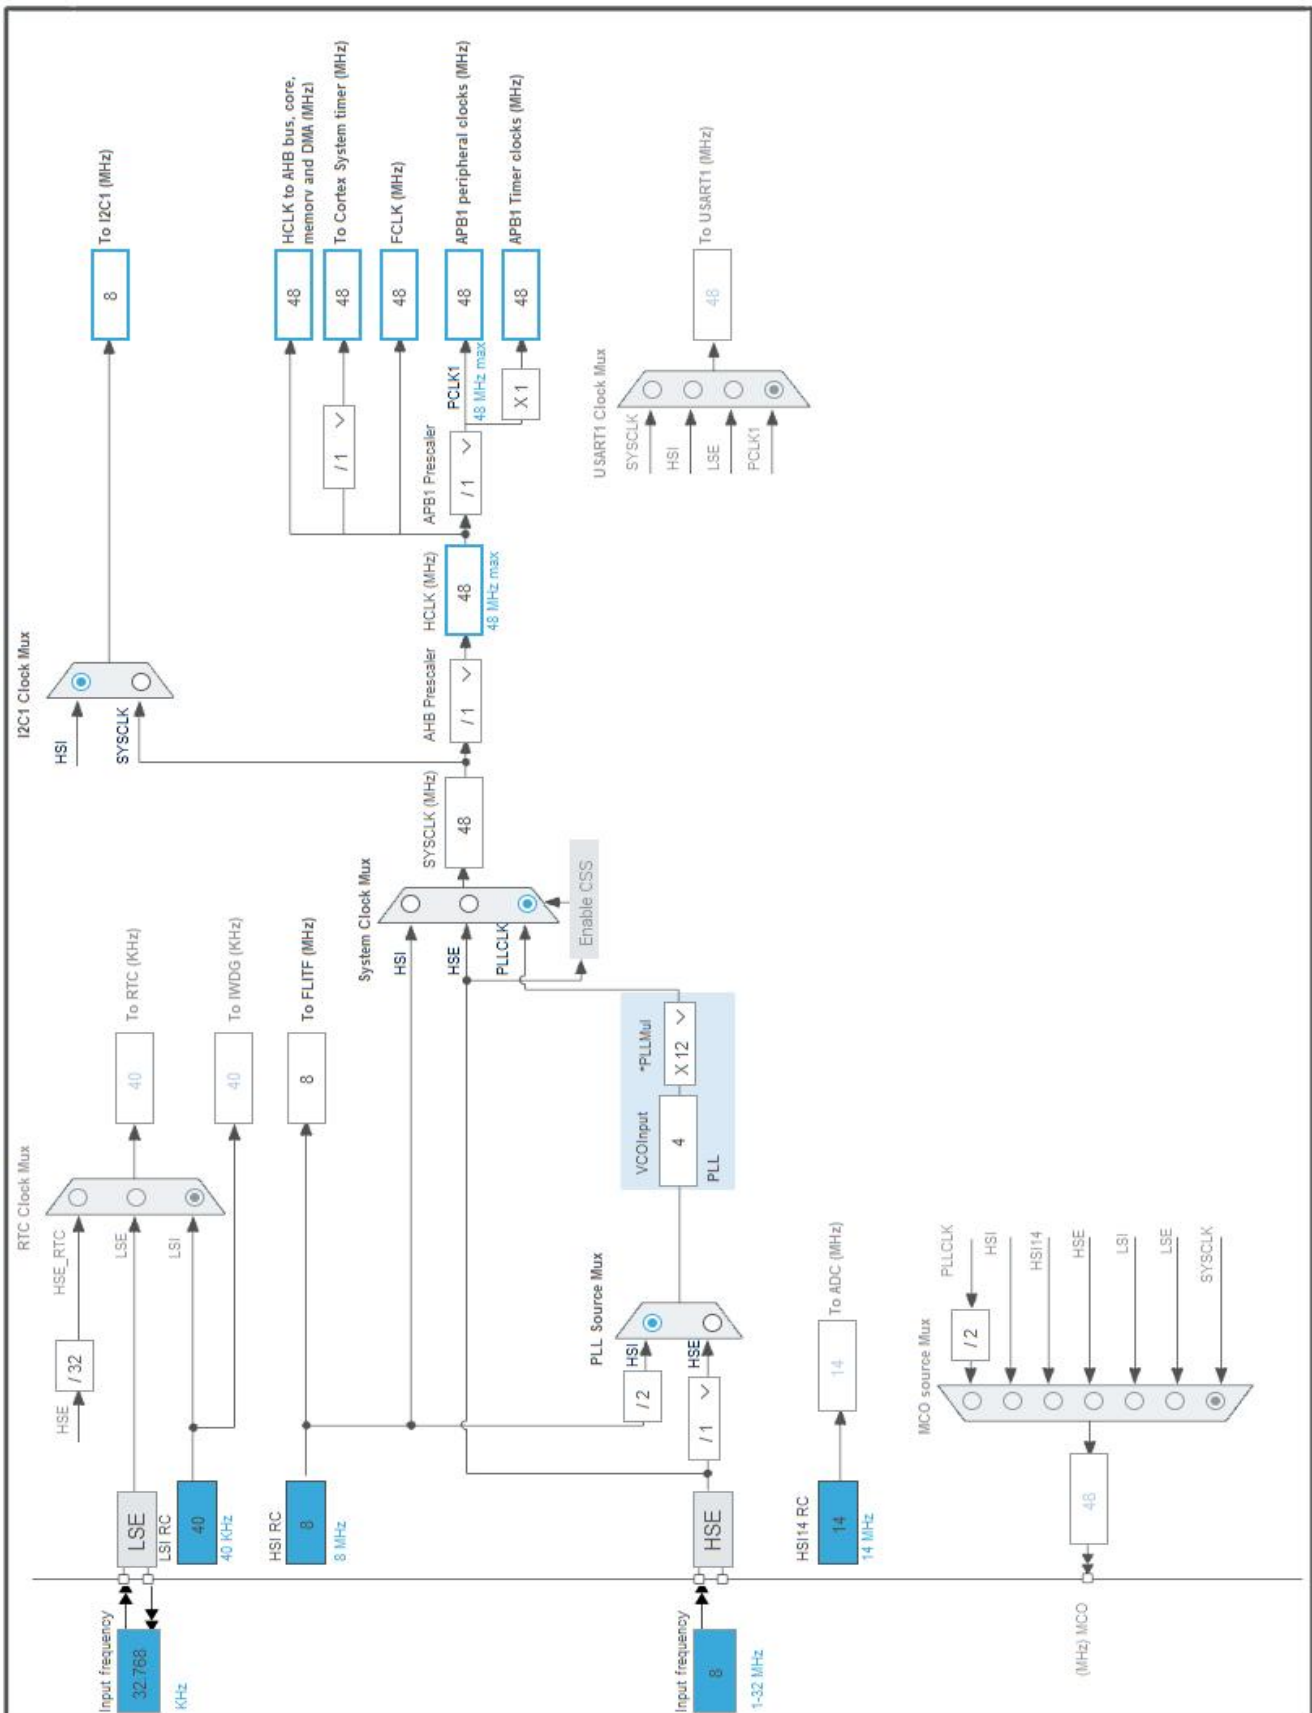

5. Software Project

5.1. Project Settings

Name	Value
Project Name	nucleo_F030R8_TFT_CubeMX
Project Folder	C:\Users\John\code\STM32CubeIDE\nucleo_F030R8_TFT_CubeMX
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F0 V1.11.2
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	Yes
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	No
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_USART2_UART_Init	USART2
4	MX_I2C1_Init	I2C1
5	MX_SPI1_Init	SPI1
6	MX_FATFS_Init	FATFS

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F0
Line	STM32F0x0 Value Line
MCU	STM32F030R8Tx
Datasheet	DS9773_Rev2

6.2. Parameter Selection

Temperature	25
Vdd	3.6

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.6	3.6
Voltage Source	Battery	Battery
Range	No Scale	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	48 MHz	0 Hz
Clock Configuration	HSE PLL All IPs ON	Regulator LP
Clock Source Frequency	8 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	23.46 mA	7.9 μ A
Duration	0.1 ms	0.9 ms
DMIPS	0.0	0.0
Ta Max	101.28	105
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	2.35 mA
Battery Life	1 month, 29 days, 16 hours	Average DMIPS	0.0 DMIPS

6.6. Chart

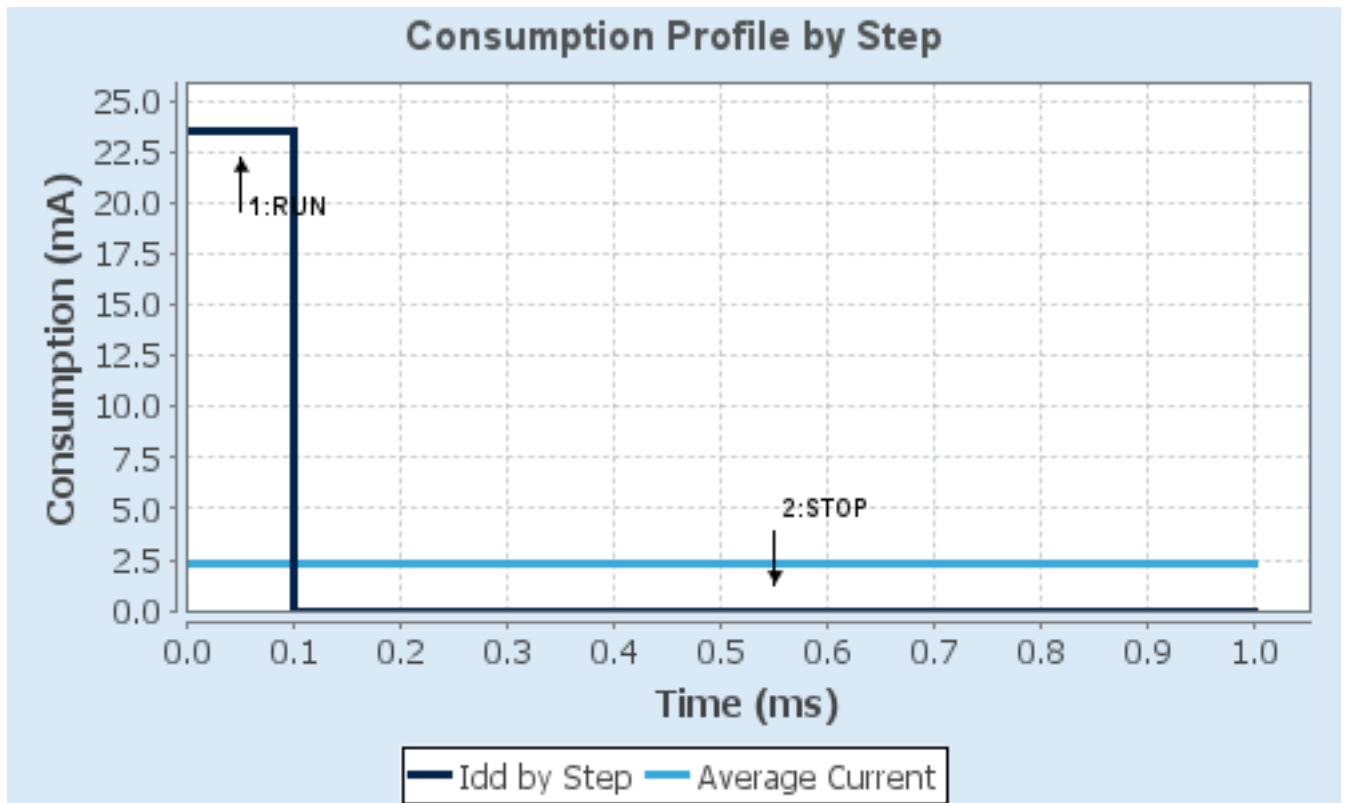

7. Peripherals and Middlewares Configuration

7.1. I2C1

I2C: I2C

7.1.1. Parameter Settings:

Timing configuration:

I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x2000090E

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

7.2. RCC

High Speed Clock (HSE): BYPASS Clock Source

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

7.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	1 WS (2 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

7.3. SPI1

Mode: Full-Duplex Master

7.3.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits *
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	4 *
Baud Rate	12.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

7.4. SYS

mode: Debug Serial Wire

Timebase Source: SysTick

7.5. USART2

Mode: Asynchronous

7.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	38400
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable

TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

7.6. FATFS

mode: User-defined

7.6.1. Set Defines:

Version:

FATFS version	R0.11
---------------	-------

Function Parameters:

FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FASTSEEK (Fast seek function)	Enabled
USE_LABEL (Volume label functions)	Disabled
USE_FORWARD (Forward function)	Disabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Multilingual Latin 1 (OEM)
USE_LFN (Use Long Filename)	Disabled
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled
USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_TINY (Tiny mode)	Disabled
FS_NORTC (Timestamp feature)	Dynamic timestamp
WORD_ACCESS (Platform dependent access option)	Byte access
FS_REENTRANT (Re-Entrancy)	Disabled
FS_TIMEOUT (Timeout ticks)	1000

FS_LOCK (Number of files opened simultaneously) 2

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	Pull-up	High *	TS_SCL
	PB9	I2C1_SDA	Alternate Function Open Drain	Pull-up	High *	TS_SDA
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PF0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	Pull-up *	High *	SPI1_SCK
	PA6	SPI1_MISO	Alternate Function Push Pull	Pull-up *	High *	SPI1_MISO
	PA7	SPI1_MOSI	Alternate Function Push Pull	Pull-up *	High *	SPI1_MOSI
SYS	PA13	SYS_SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_SWCLK	n/a	n/a	n/a	TCK
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	STLINK_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	STLINK_RX
Single Mapped Signals	PF1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
GPIO	PC13	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	USER_BTN
	PC7	GPIO_Output	Output Push Pull	Pull-up *	Medium *	DATA_CMD
	PA8	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	TS_INT
	PA10	GPIO_Input	Input mode	Pull-up *	n/a	SD_DETECT
	PB3	GPIO_Output	Output Push Pull	Pull-up *	Medium *	SD_CS
	PB6	GPIO_Output	Output Push Pull	Pull-up *	Medium *	LCD_CS

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
System service call via SWI instruction	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 global interrupt	unused		
SPI1 global interrupt	unused		
USART2 global interrupt	unused		

8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
System service call via SWI instruction	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true

* User modified value

9. System Views

9.1. Category view

9.1.1. Current

Middleware				
FATFS				
System Core	Analog	Timers	Connectivity	Computing
DMA			I2C1	
GPIO			SPI1	
IVIC			USART2	
RCC				
SYS				

10. Docs & Resources

Type	Link
Datasheet	http://www.st.com/resource/en/datasheet/DM00088500.pdf
Reference manual	http://www.st.com/resource/en/reference_manual/DM00091010.pdf
Programming manual	http://www.st.com/resource/en/programming_manual/DM00051352.pdf
Errata sheet	http://www.st.com/resource/en/errata_sheet/DM00091791.pdf
Application note	http://www.st.com/resource/en/application_note/CD00160362.pdf
Application note	http://www.st.com/resource/en/application_note/CD00167594.pdf
Application note	http://www.st.com/resource/en/application_note/CD00211314.pdf
Application note	http://www.st.com/resource/en/application_note/CD00249778.pdf
Application note	http://www.st.com/resource/en/application_note/CD00259245.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264342.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00024853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00025071.pdf
Application note	http://www.st.com/resource/en/application_note/DM00042534.pdf
Application note	http://www.st.com/resource/en/application_note/DM00052530.pdf
Application note	http://www.st.com/resource/en/application_note/DM00053084.pdf
Application note	http://www.st.com/resource/en/application_note/DM00072315.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073742.pdf
Application note	http://www.st.com/resource/en/application_note/DM00080497.pdf
Application note	http://www.st.com/resource/en/application_note/DM00085385.pdf
Application note	http://www.st.com/resource/en/application_note/DM00087593.pdf
Application note	http://www.st.com/resource/en/application_note/DM00089834.pdf
Application note	http://www.st.com/resource/en/application_note/DM00129215.pdf
Application note	http://www.st.com/resource/en/application_note/DM00145318.pdf
Application note	http://www.st.com/resource/en/application_note/DM00160482.pdf

Application note http://www.st.com/resource/en/application_note/DM00210690.pdf
Application note http://www.st.com/resource/en/application_note/DM00220769.pdf
Application note http://www.st.com/resource/en/application_note/DM00257177.pdf
Application note http://www.st.com/resource/en/application_note/DM00226326.pdf
Application note http://www.st.com/resource/en/application_note/DM00236305.pdf
Application note http://www.st.com/resource/en/application_note/DM00188145.pdf
Application note http://www.st.com/resource/en/application_note/DM00327191.pdf
Application note http://www.st.com/resource/en/application_note/DM00355687.pdf
Application note http://www.st.com/resource/en/application_note/DM00354244.pdf
Application note http://www.st.com/resource/en/application_note/DM00315319.pdf
Application note http://www.st.com/resource/en/application_note/DM00380469.pdf
Application note http://www.st.com/resource/en/application_note/DM00395696.pdf
Application note http://www.st.com/resource/en/application_note/DM00445657.pdf
Application note http://www.st.com/resource/en/application_note/DM00493651.pdf
Application note http://www.st.com/resource/en/application_note/DM00483659.pdf
Application note http://www.st.com/resource/en/application_note/DM00536349.pdf
Application note http://www.st.com/resource/en/application_note/DM00725181.pdf