




Example 00. Flash Memory Down

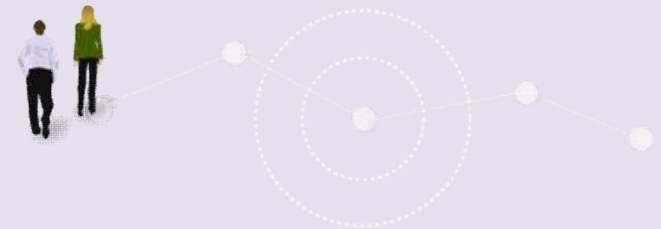

Example 00. *Flash Memory Down*

Example 00. Flash Memory Down

- FPGA(Basys3) 를 *Power Off* → *On* 경우 , 프로그램 유지되게 하기 위한 방법
 - Project Manager → Settings 선택 → Bitstream → bin_file 체크 & Apply : Basys3 보드 뒤에 있는 QSPI Flash Memory에 결과 bin파일이 저장

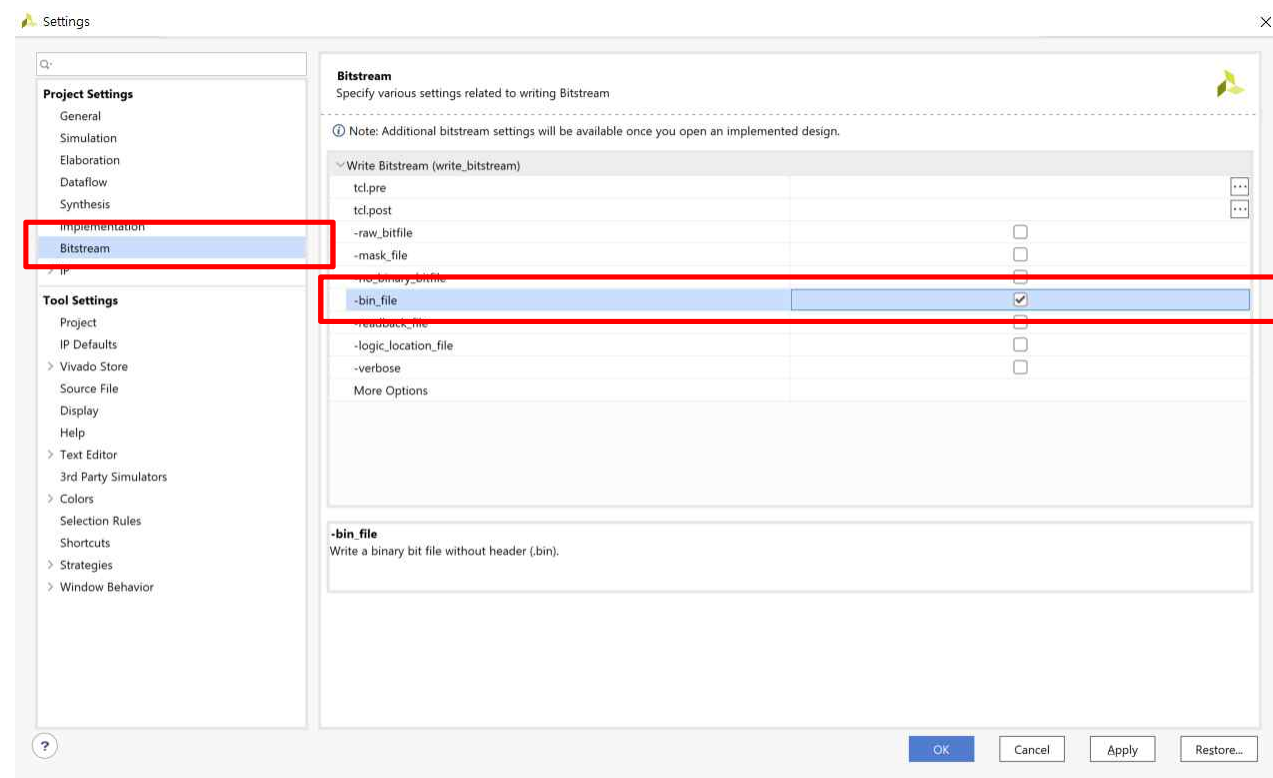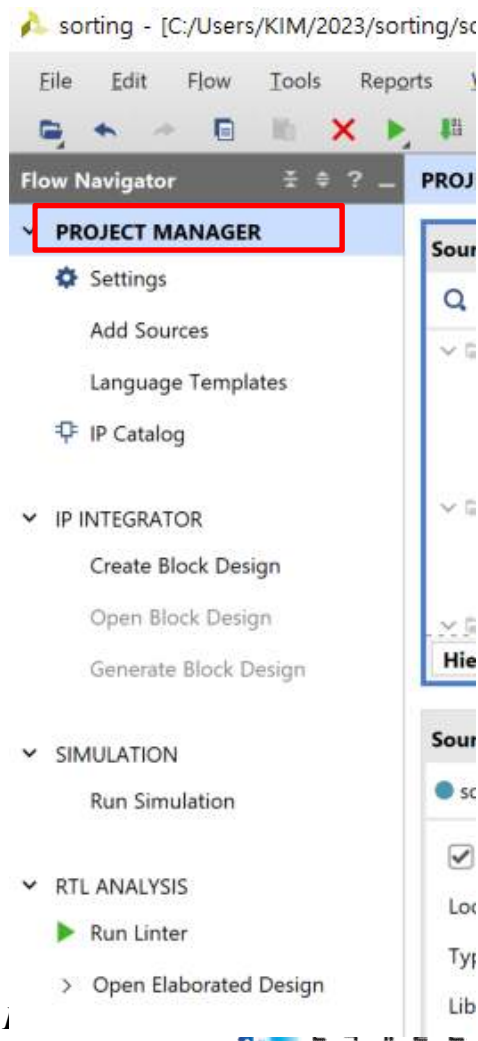

Example 00. Flash Memory Down

- **FPGA(Basys3) 를 Power Off → On 경우 , 프로그램 유지되게 하기 위한 방법**
 - Project Manager → Settings 선택 → Bitstream → bin_file 체크 & Apply : Basys3 보드 뒤에 있는 QSPI Flash Memory에 결과 bin파일이 저장
 - Program and Debug → Open Hardware Manager → Add Configuration Memory Device → FPGA Manual과 보드를 확인 및 보드에 맞는 Memory를 선택

The screenshot illustrates the process of adding a configuration memory device in the Xilinx IDE. The left sidebar shows the 'PROGRAM AND DEBUG' section with 'Open Hardware Manager' highlighted. The 'Add Configuration Memory Device' dialog is open, showing a search for '3233' resulting in 'mx25l3273f-spi-x1_x2_x4'. The 'Hardware' window shows the device is programmed. Red boxes and arrows highlight the selection process, with Korean text '모델 확인' (Check model) and 'Click' annotations.

Part: xc7a35t_0

Device: xc7a35t_0

Filter

Manufacturer: All

Density (Mb): All

Type: All

Width: All

Reset All Filters

Select Configuration Memory Part

Search: 3233 (1 match)

Name	Part	Manufacturer	Alias
mx25l3273f-spi-x1_x2_x4	mx25l3273f	Macronix	mx25l3273f-spi-x1_x2_x4

Hardware

Name	Status
localhost (1)	Connected
xilinx_tcf/Digilent/210183B7A295A	Open
xc7a35t_0 (2)	Programmed
XADC (System Monitor)	

모델 확인 mx25l3273f-spi-x1_x2_x4

Click

Click

OK

Example 00. Flash Memory Down

➤ FPGA(Basys3) 를 *Power Off* → *On* 경우 , 프로그램 유지되게 하기 위한 방법

- Program and Debug → Open Harsware Manager → Add Configuration Memory Device → FPGA Manual과 보드를 확인 및 보드에 맞는 Memory를 선택

The screenshot illustrates the process of configuring the Basys3 hardware manager. The main window shows the 'Hardware' tab with a list of devices. A red box highlights the 'mx25I3273f-spi-x1_x2_x4' device, with the Korean text '우클릭' (Right-click) next to it. A context menu is open, showing options like 'Configuration Memory Device Properties...', 'Remove Configuration Memory Device...', 'Program Configuration Memory Device...', 'Readback Configuration Memory Device...', and 'Export to Spreadsheet...'. The 'Program Configuration Memory Device...' option is highlighted. Below this, the 'Configuration Memory Device Properties' window is shown, displaying details for the selected device. To the right, the 'Program Configuration Memory Device' dialog box is open, showing the 'Memory Device' and 'Configuration file' fields. A red box highlights the 'Configuration file' field, and another red box highlights the 'Sorting.bin' file in the 'Specify File' dialog box. The 'Specify File' dialog box also shows the 'Look in' field set to 'impl_1' and the 'File name' field set to 'Sorting.bin'. The 'Recent Directories' and 'File Preview' sections are also visible.

우클릭

Configuration Memory Device Properties

Program Configuration Memory Device

Specify File

Look in: impl_1

File name: Sorting.bin

Files of type: Configuration Files (.mcs, .bin)

File Preview

Size: 271.4 KB

Type: Bitstream file

Owner: DESKTOP-QVKKRPC\KIM