
CUT & SPEC SHEET



ATI Products **Snow Tarp**

Construction site snow removal has never been easier thanks to the ATI Snow Tarps. Quality combined with practical way to remove freshly fallen snow makes this a must have for every jobsite. Simply lay your tarps out before the snow falls, tallow webbing always facing down, attached the corners to a crane or lift after the snowfall and lift the snow off your jobsite and watch your productivity and efficiency improve. A practical solution to a common problem. And most importantly, it's safe.

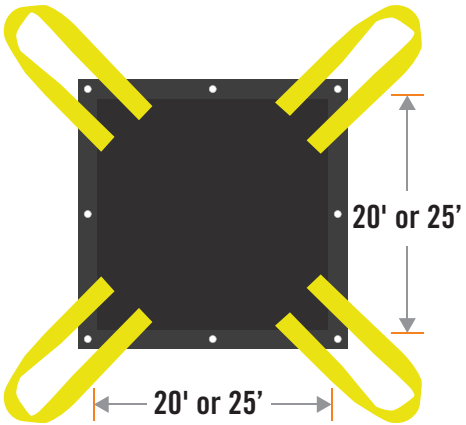

FEATURES

- 18 oz heavy-duty PVC-coated polyester
- Stock color: Black
- Stock sizes: 20'x20' 25'x25'
- Snow Removal Tarp with 4 Loop Points
- 2" yellow webbing 12,000 lb. breaking strength
- Stainless Steel, rust-proof grommets installed 24" on center around the perimeter of the tarp
- Webbing-reinforced perimeter
- Heat-sealed seam construction constructed with heavy-duty, UV-resistant thread with Superior Strength
- "Lockstitch sewing" around the perimeter
- Made in the USA

USES

- Jobsite snow removal
- Superior fabrication and Strong Man Quality
- Easy to use & efficient
- Helps to keep your jobsite on schedule & on budget by saving you labor & lost man hours
- Weather resistant, mildew & mold resistant

** Specifications subject to change.*

SAFETY ▪ SERVICE ▪ SOLUTIONS

www.ati-constructionproducts.com
(888) 949-3199
sales@ati-constructionproducts.com

Distribution Centers:
* Houston, TX
* Miami, FL
* Chicago, IL
* Los Angeles, CA
* Kent, WA

CUT & SPEC SHEET

TEST RESULTS

BREAKING STRENGTH AND ELONGATION OF TEXTILE FABRICS (LIFT TEST)	
Tarp Lifting Capacity Maximum	4,000 lbs Initial Lift of 2,000 lbs with additional lifts in 500 lb increments to an end point of 4,000 lbs.
Lift Cycle test	2" yellow webbing 12,000 lb. breaking strength

SPECIFICATIONS

Weight (FS-191-5041)	18. oz / yard^2
Fabric Type	Polyester (Woven)
Thread Count (Warp x Fill)	18 x 17 (1000D x 1300D)
Tensile Strength, Grab Method (lbs.) (FS-191-5100)	Warp 410 x Fill 410
Tensile Strength, Strip Method (lbs.) (FS-191-5102)	Warp 300 x Fill 300
Tear Strength, Tongue Method (lbs.) (FS-191-5134)	Warp 100 x Fill 100
Adhesion (lbs. / inch) (FS-191-5970)	Warp 12 X Fill 10
Abrasion Resistance (FS-191-5306)	400 Cycles
Hydrostatic Resistance (lbs. / inch^2) (FS-191-5512)	At least 600 PSI

High Temperature Resistance (FS-191-5872)	180° F (Does Not Block)
Cold Crack (FS-191-5874)	-40° F
U.V. Resistance (Weather-O-Meter)	Not Excessive Fading After 300 Hours
Elongation at Break (FS-191-5102)	Warp: Approximately 17% Fill: Approximately 23%
Treatments	Anti Mildew and Anti Fungal Additives

**For use with freshly fallen snow only. Never use a damaged, torn or ripped tarp. Not designed to move equipment, tools, construction paraphernalia, supplies or other jobsite items. Webbing must always face down when being used. Never stand under tarp that is in use and never maneuver/move tarp over jobsite personnel or buildings that may contain jobsite personnel.*

***Specifications subject to change.*

SAFETY ▪ SERVICE ▪ SOLUTIONS

www.ati-constructionproducts.com
(888) 949-3199
sales@ati-constructionproducts.com

ATI
ATI-PRODUCTS & SERVICES

Distribution Centers:
* Houston, TX
* Miami, FL
* Chicago, IL
* Los Angeles, CA
* Kent, WA