



1. Description

1.1. Project

Project Name	dev_407_ILI9341
Board Name	custom
Generated with:	STM32CubeMX 6.4.0
Date	12/12/2021


1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F407/417
MCU name	STM32F407VETx
MCU Package	LQFP100
MCU Pin number	100

1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------

2. Pinout Configuration

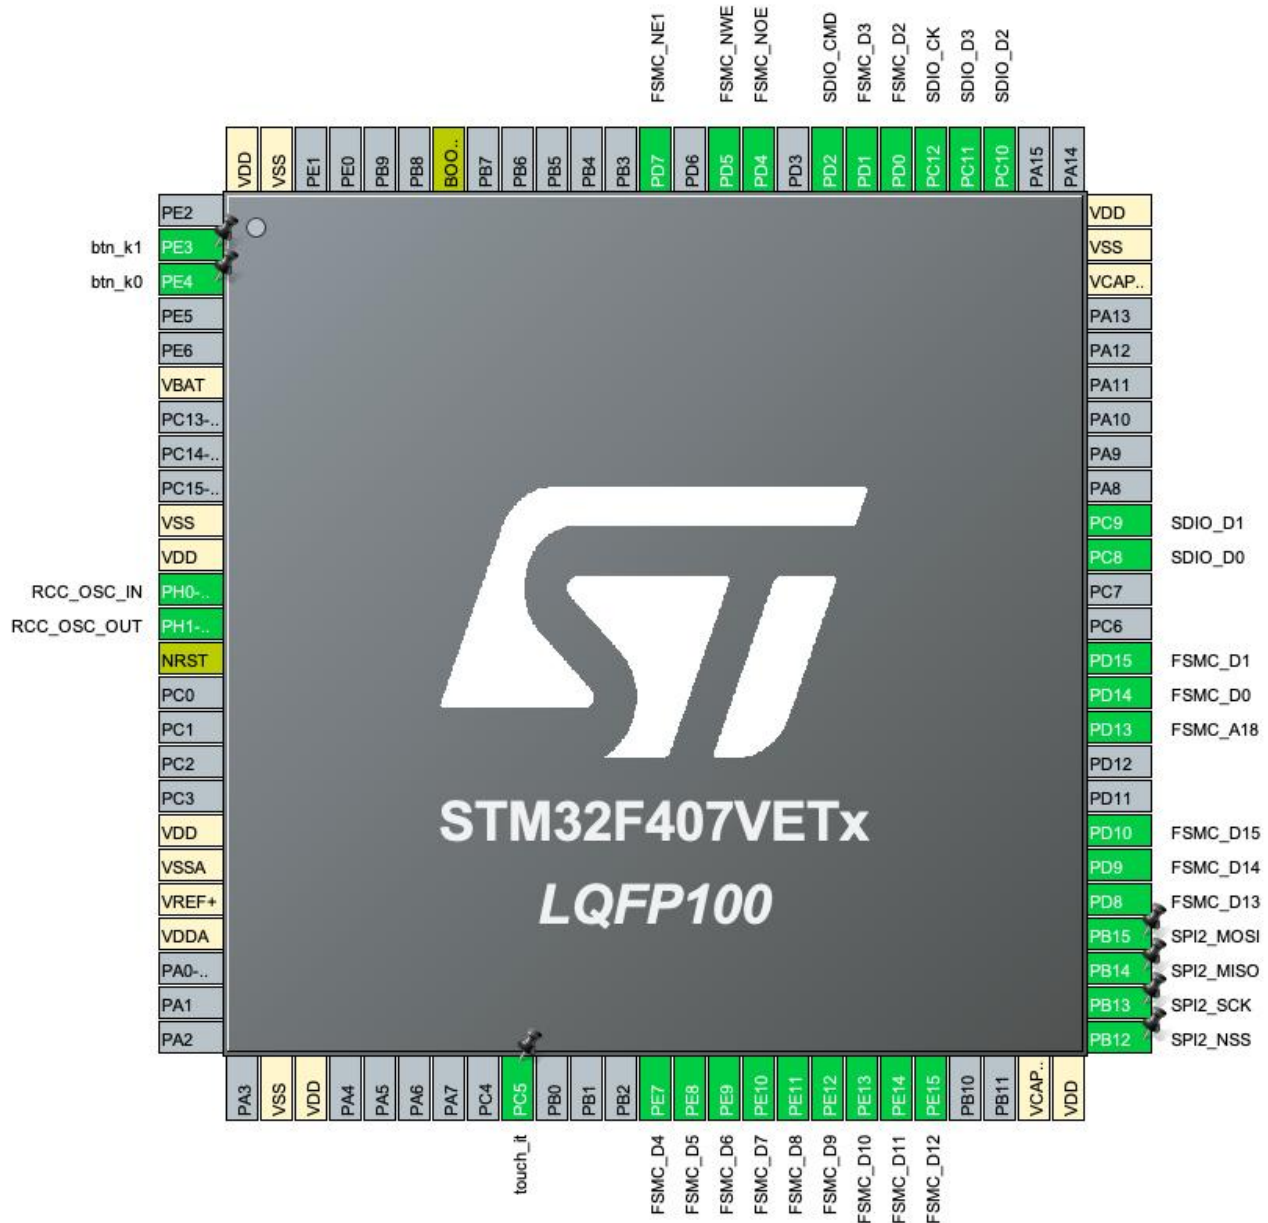


3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
2	PE3	I/O	GPIO_EXTI3	btn_k1
3	PE4	I/O	GPIO_EXTI4	btn_k0
6	VBAT	Power		
10	VSS	Power		
11	VDD	Power		
12	PH0-OSC_IN	I/O	RCC_OSC_IN	
13	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
14	NRST	Reset		
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
27	VSS	Power		
28	VDD	Power		
34	PC5	I/O	GPIO_EXTI5	touch_it
38	PE7	I/O	FSMC_D4	
39	PE8	I/O	FSMC_D5	
40	PE9	I/O	FSMC_D6	
41	PE10	I/O	FSMC_D7	
42	PE11	I/O	FSMC_D8	
43	PE12	I/O	FSMC_D9	
44	PE13	I/O	FSMC_D10	
45	PE14	I/O	FSMC_D11	
46	PE15	I/O	FSMC_D12	
49	VCAP_1	Power		
50	VDD	Power		
51	PB12	I/O	SPI2_NSS	
52	PB13	I/O	SPI2_SCK	
53	PB14	I/O	SPI2_MISO	
54	PB15	I/O	SPI2_MOSI	
55	PD8	I/O	FSMC_D13	
56	PD9	I/O	FSMC_D14	
57	PD10	I/O	FSMC_D15	
60	PD13	I/O	FSMC_A18	
61	PD14	I/O	FSMC_D0	
62	PD15	I/O	FSMC_D1	

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
65	PC8	I/O	SDIO_D0	
66	PC9	I/O	SDIO_D1	
73	VCAP_2	Power		
74	VSS	Power		
75	VDD	Power		
78	PC10	I/O	SDIO_D2	
79	PC11	I/O	SDIO_D3	
80	PC12	I/O	SDIO_CK	
81	PD0	I/O	FSMC_D2	
82	PD1	I/O	FSMC_D3	
83	PD2	I/O	SDIO_CMD	
85	PD4	I/O	FSMC_NOE	
86	PD5	I/O	FSMC_NWE	
88	PD7	I/O	FSMC_NE1	
94	BOOT0	Boot		
99	VSS	Power		
100	VDD	Power		

4. Clock Tree Configuration

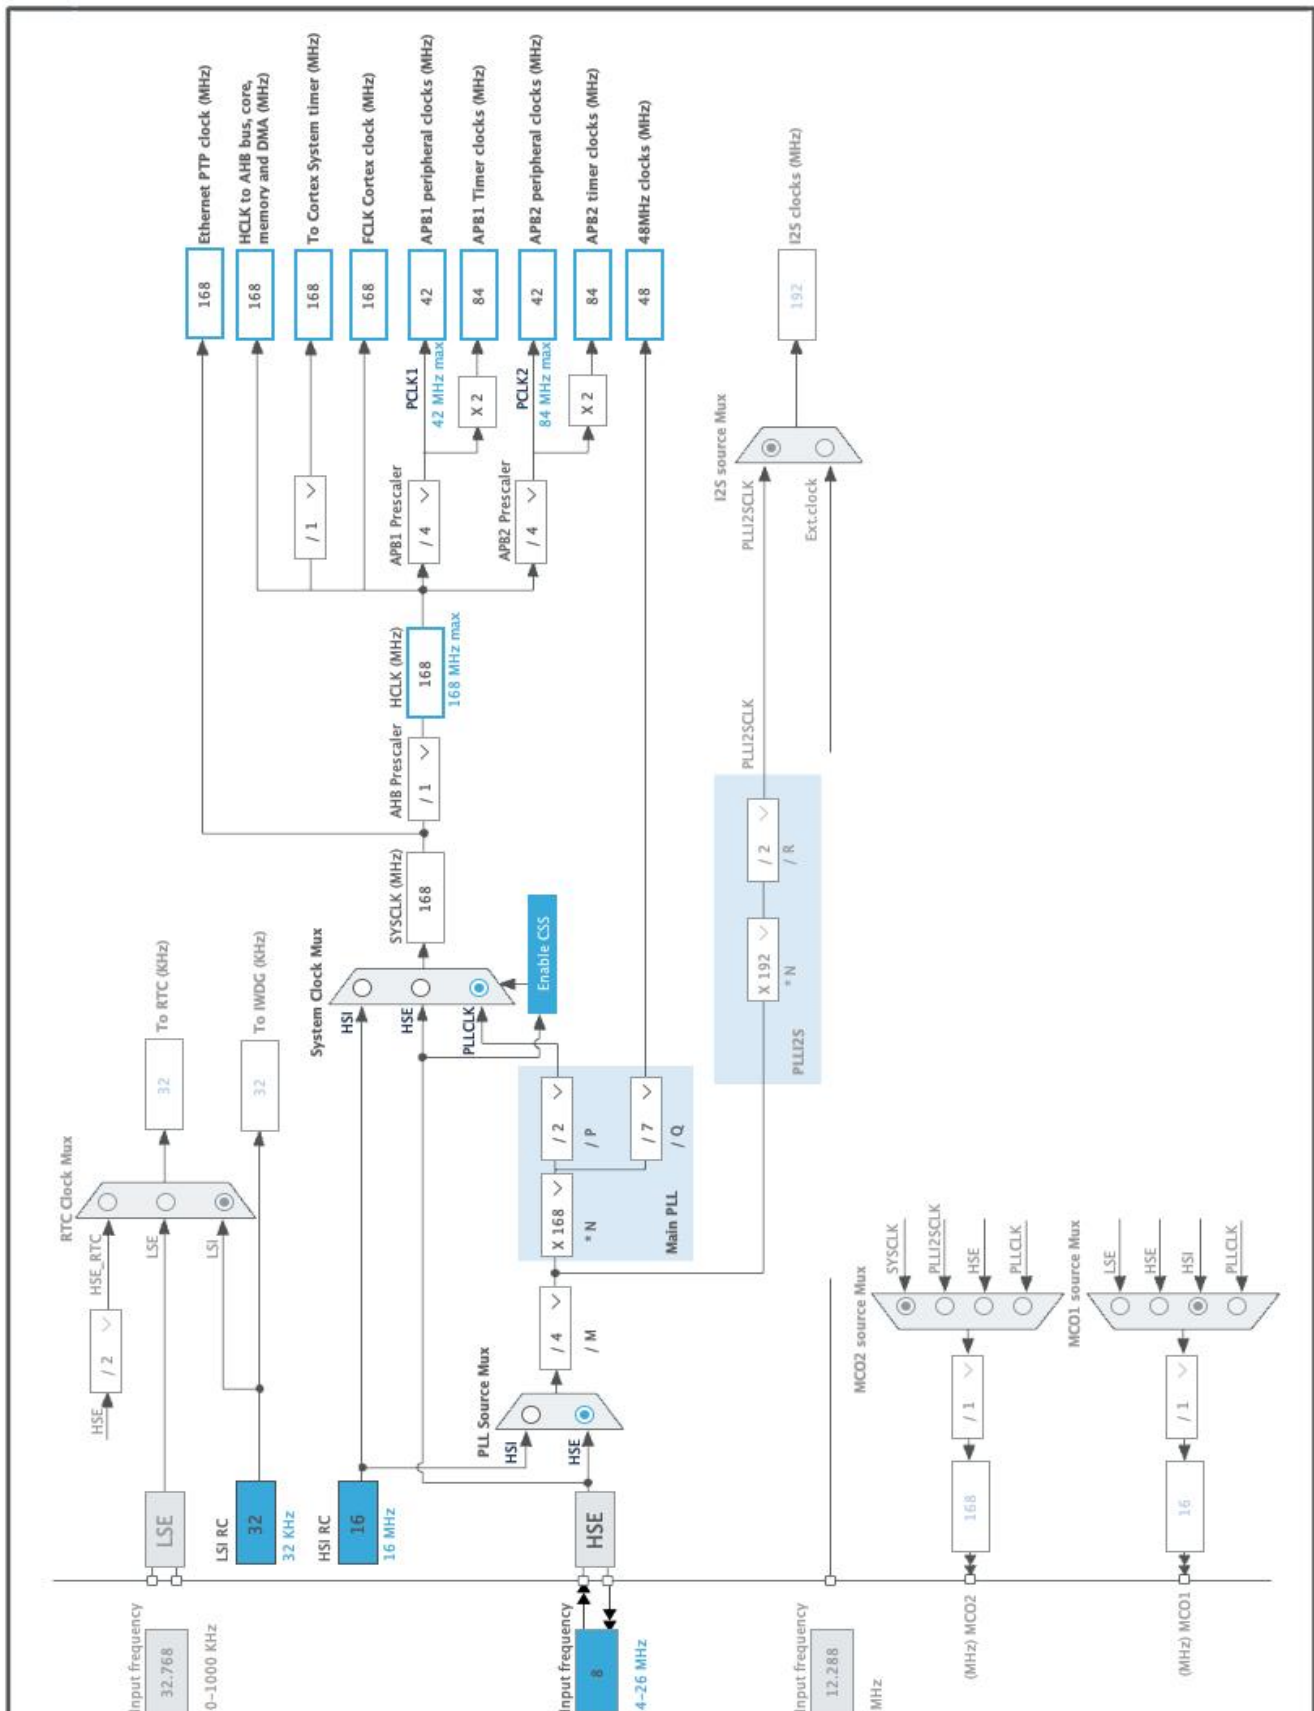

5. Software Project

5.1. Project Settings

Name	Value
Project Name	dev_407_ILI9341
Project Folder	/Users/omurakosuke/STM32Cube/dev_407_ILI9341
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F4 V1.26.2
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	MX_GPIO_Init	GPIO
2	SystemClock_Config	RCC
3	MX_FSMC_Init	FSMC
4	MX_SDIO_SD_Init	SDIO
5	MX_SPI2_Init	SPI2
6	MX_DMA_Init	DMA
7	MX_FATFS_Init	FATFS

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F407/417
MCU	STM32F407VETx
Datasheet	DS8626_Rev8

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	168 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	46 mA	280 μ A
Duration	0.1 ms	0.9 ms
DMIPS	210.0	0.0
Ta Max	98.47	104.96
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	4.85 mA
Battery Life	29 days, 4 hours	Average DMIPS	210.0 DMIPS

6.6. Chart

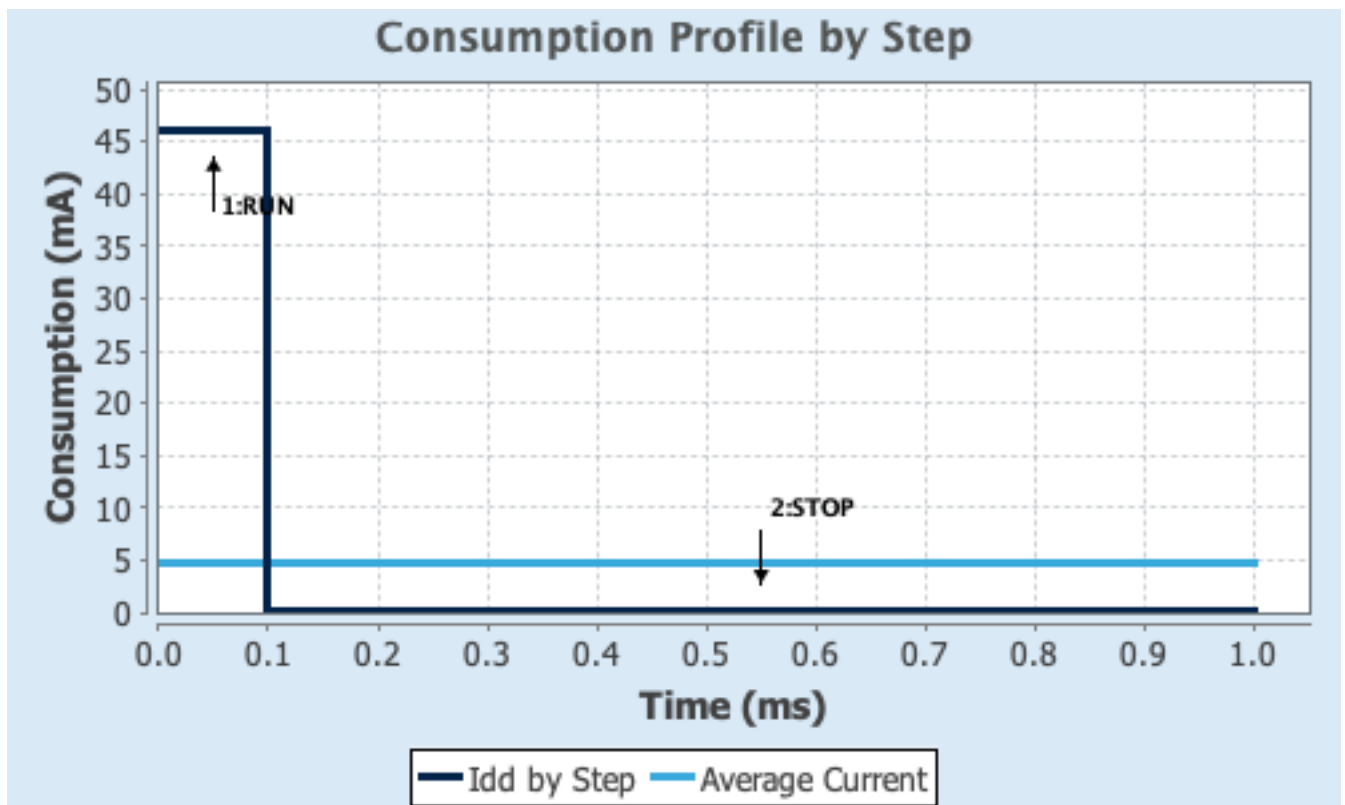

7. Peripherals and Middlewares Configuration

7.1. FSMC

NOR Flash/PSRAM/SRAM/ROM/LCD 1

Chip Select: set

Memory type: LCD Interface

LCD Register Select: A18

Data: 16 bits

7.1.1. NOR/PSRAM 1:

NOR/PSRAM control:

Memory type	LCD Interface
Bank	Bank 1 NOR/PSRAM 1
Write operation	Enabled
Extended mode	Disabled

NOR/PSRAM timing:

Address setup time in HCLK clock cycles	6 *
Data setup time in HCLK clock cycles	6 *
Bus turn around time in HCLK clock cycles	0 *

7.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

7.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

7.3. SDIO

Mode: SD 4 bits Wide bus

7.3.1. Parameter Settings:

SDIO parameters:

Clock transition on which the bit capture is made	Rising transition
SDIO Clock divider bypass	Disable
SDIO Clock output enable when the bus is idle	Disable the power save for the clock
SDIO hardware flow control	The hardware control flow is disabled
SDIOCLK clock divide factor	0

7.4. SPI2

Mode: Full-Duplex Master

Hardware NSS Signal: Hardware NSS Output Signal

7.4.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	64 *
Baud Rate	656.25 KBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Output Hardware

7.5. SYS

Timebase Source: SysTick

7.6. ARM.CMSIS.5.6.0

mode: CMSISJJDSP

7.7. FATFS

mode: SD Card

7.7.1. Set Defines:

Version:

FATFS version R0.12c

Function Parameters:

FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled without LF -> CRLF conversion *
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FASTSEEK (Fast seek function)	Enabled
USE_EXPAND (Use f_expand function)	Disabled
USE_CHMOD (Change attributes function)	Disabled
USE_LABEL (Volume label functions)	Disabled
USE_FORWARD (Forward function)	Disabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Latin 1
USE_LFN (Use Long Filename)	Disabled
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled
USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_TINY (Tiny mode)	Disabled
FS_EXFAT (Support of exFAT file system)	Disabled
FS_NORTC (Timestamp feature)	Dynamic timestamp
FS_REENTRANT (Re-Entrancy)	Disabled
FS_TIMEOUT (Timeout ticks)	1000
FS_LOCK (Number of files opened simultaneously)	2

7.7.2. Advanced Settings:

SDIO/SDMMC:

SDIO instance	SDIO
Use dma template	Enabled *
BSP code for SD	Generic

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
FSMC	PE7	FSMC_D4	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE8	FSMC_D5	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE9	FSMC_D6	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE10	FSMC_D7	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE11	FSMC_D8	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE12	FSMC_D9	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE13	FSMC_D10	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE14	FSMC_D11	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PE15	FSMC_D12	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD8	FSMC_D13	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD9	FSMC_D14	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD10	FSMC_D15	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD13	FSMC_A18	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD14	FSMC_D0	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD15	FSMC_D1	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD0	FSMC_D2	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD1	FSMC_D3	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD4	FSMC_NOE	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD5	FSMC_NWE	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD7	FSMC_NE1	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
RCC	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SDIO	PC8	SDIO_D0	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC9	SDIO_D1	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC10	SDIO_D2	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC11	SDIO_D3	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC12	SDIO_CK	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD2	SDIO_CMD	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
SPI2	PB12	SPI2_NSS	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PB13	SPI2_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PB14	SPI2_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
	PB15	SPI2_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
GPIO	PE3	GPIO_EXTI3	External Interrupt Mode with Falling edge trigger detection	Pull-up *	n/a	btn_k1
	PE4	GPIO_EXTI4	External Interrupt Mode with Falling edge trigger detection	Pull-up *	n/a	btn_k0
	PC5	GPIO_EXTI5	External Interrupt Mode with Falling edge trigger detection	Pull-up *	n/a	touch_it

8.2. DMA configuration

DMA request	Stream	Direction	Priority
SDIO_RX	DMA2_Stream3	Peripheral To Memory	Low
SDIO_TX	DMA2_Stream6	Memory To Peripheral	Low

SDIO_RX: DMA2_Stream3 DMA request Settings:

Mode: **Peripheral Flow Control ***
Use fifo: **Enable ***
FIFO Threshold: Full
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: **Word ***
Memory Data Width: Word
Peripheral Burst Size: **4 Increment ***
Memory Burst Size: 4 Increment

SDIO_TX: DMA2_Stream6 DMA request Settings:

Mode: **Peripheral Flow Control ***
Use fifo: **Enable ***
FIFO Threshold: Full
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: **Word ***
Memory Data Width: Word
Peripheral Burst Size: **4 Increment ***
Memory Burst Size: 4 Increment

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
EXTI line3 interrupt	true	0	0
EXTI line4 interrupt	true	0	0
EXTI line[9:5] interrupts	true	0	0
SPI2 global interrupt	true	0	0
SDIO global interrupt	true	0	0
DMA2 stream3 global interrupt	true	0	0
DMA2 stream6 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
FPU global interrupt	unused		

8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
EXTI line3 interrupt	false	true	true
EXTI line4 interrupt	false	true	true
EXTI line[9:5] interrupts	false	true	true
SPI2 global interrupt	false	true	true

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
SDIO global interrupt	false	true	true
DMA2 stream3 global interrupt	false	true	true
DMA2 stream6 global interrupt	false	true	true

* User modified value

9. System Views

9.1. Category view

9.1.1. Current

Middleware

FATFS 

Additional Software

CMSIS 

System Core

Analog

Timers

Connectivity

Multimedia

Security

Computing

DMA 

GPIO 

NVIC 

RCC 

SYS 

FSMC 

SDIO 

SPI2 

10. Software Pack Report

10.1. Software Pack selected

Vendor	Name	Version	Component
ARM	CMSIS	5.6.0	Class : CMSIS Group : CORE Version : 5.3.0 Class : CMSIS Group : DSP Variant : Library Version : 1.7.0

11. Docs & Resources

Type	Link
Datasheet	http://www.st.com/resource/en/datasheet/DM00037051.pdf
Reference manual	http://www.st.com/resource/en/reference_manual/DM00031020.pdf
Programming manual	http://www.st.com/resource/en/programming_manual/DM00046982.pdf
Errata sheet	http://www.st.com/resource/en/errata_sheet/DM00037591.pdf
Application note	http://www.st.com/resource/en/application_note/CD00167594.pdf
Application note	http://www.st.com/resource/en/application_note/CD00211314.pdf
Application note	http://www.st.com/resource/en/application_note/CD00249778.pdf
Application note	http://www.st.com/resource/en/application_note/CD00259245.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264321.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264342.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00024853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00025071.pdf
Application note	http://www.st.com/resource/en/application_note/DM00040802.pdf
Application note	http://www.st.com/resource/en/application_note/DM00040808.pdf
Application note	http://www.st.com/resource/en/application_note/DM00042534.pdf
Application note	http://www.st.com/resource/en/application_note/DM00046011.pdf
Application note	http://www.st.com/resource/en/application_note/DM00050879.pdf
Application note	http://www.st.com/resource/en/application_note/DM00072315.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073742.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00080497.pdf
Application note	http://www.st.com/resource/en/application_note/DM00081379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00115714.pdf
Application note	http://www.st.com/resource/en/application_note/DM00123028.pdf

Application note http://www.st.com/resource/en/application_note/DM00129215.pdf

Application note http://www.st.com/resource/en/application_note/DM00154959.pdf

Application note http://www.st.com/resource/en/application_note/DM00160482.pdf

Application note http://www.st.com/resource/en/application_note/DM00213525.pdf

Application note http://www.st.com/resource/en/application_note/DM00220769.pdf

Application note http://www.st.com/resource/en/application_note/DM00226326.pdf

Application note http://www.st.com/resource/en/application_note/DM00236305.pdf

Application note http://www.st.com/resource/en/application_note/DM00257177.pdf

Application note http://www.st.com/resource/en/application_note/DM00263732.pdf

Application note http://www.st.com/resource/en/application_note/DM00272912.pdf

Application note http://www.st.com/resource/en/application_note/DM00281138.pdf

Application note http://www.st.com/resource/en/application_note/DM00296349.pdf

Application note http://www.st.com/resource/en/application_note/DM00315319.pdf

Application note http://www.st.com/resource/en/application_note/DM00327191.pdf

Application note http://www.st.com/resource/en/application_note/DM00354244.pdf

Application note http://www.st.com/resource/en/application_note/DM00373474.pdf

Application note http://www.st.com/resource/en/application_note/DM00380469.pdf

Application note http://www.st.com/resource/en/application_note/DM00395696.pdf

Application note http://www.st.com/resource/en/application_note/DM00431633.pdf

Application note http://www.st.com/resource/en/application_note/DM00493651.pdf

Application note http://www.st.com/resource/en/application_note/DM00536349.pdf

Application note http://www.st.com/resource/en/application_note/DM00725181.pdf