Aim: Using Packet Tracer, create a basic network of two components using appropriate network wire.

1.Creating basic network between two PC with the help of Copper Cross-Over wire, where interface is fast ethernet.

OUTPUT:

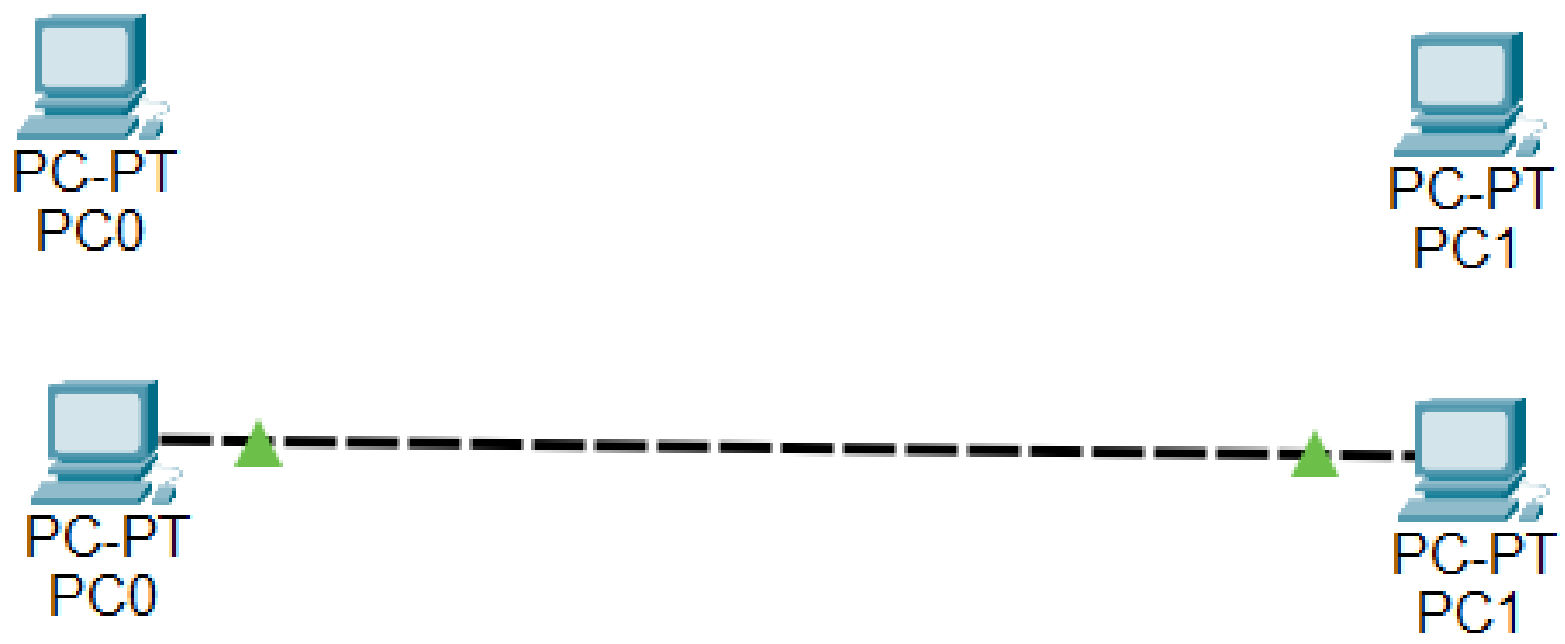

2.Setting/Configuring the IP addresses of both PC.

OUTPUT:

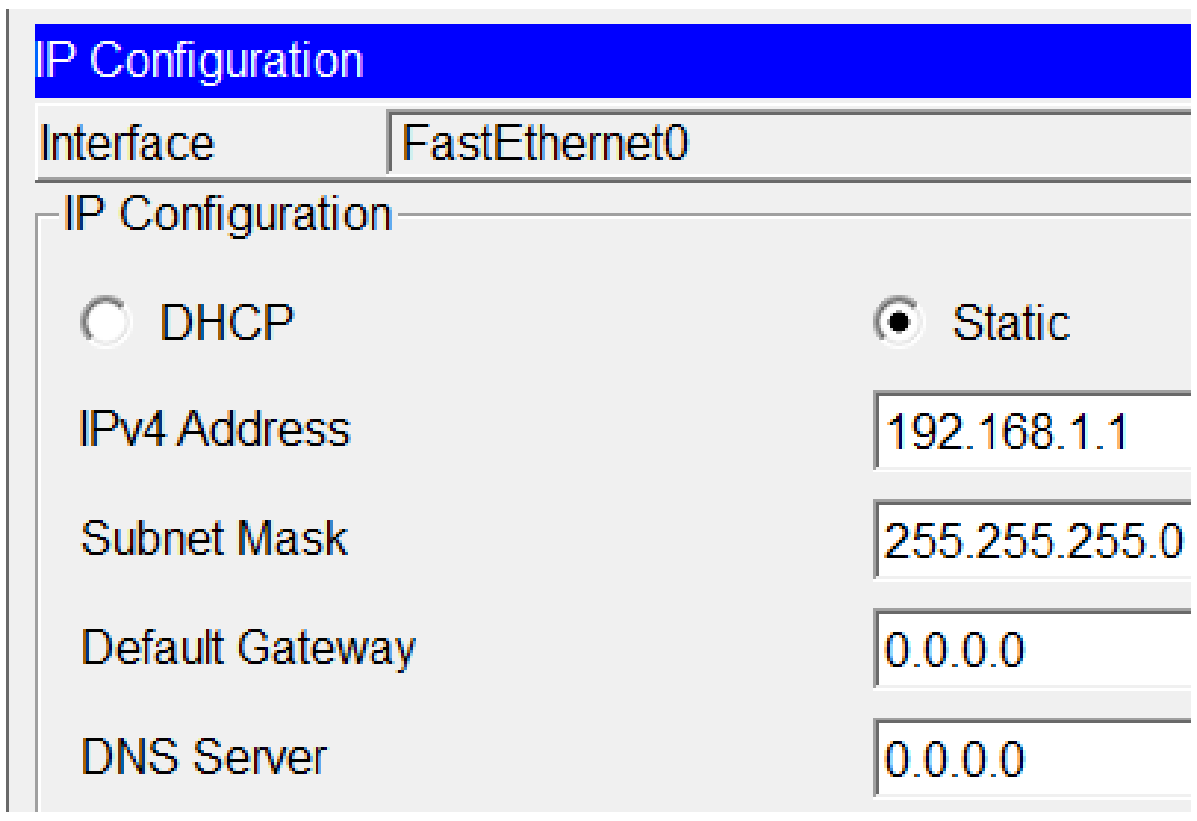

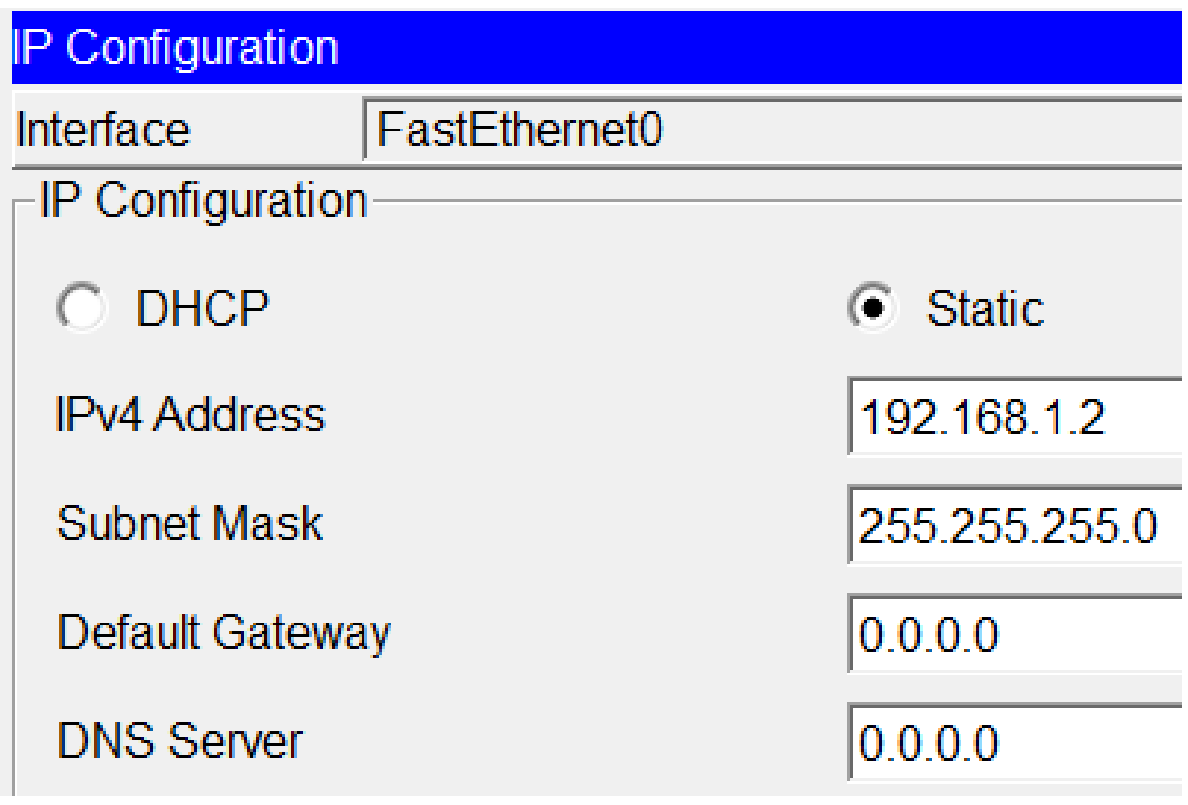

3.Checking if both PC can send and receive packets for the communication.

Command: ping ip_address

OUTPUT: