
Advanced signal processing

Exam 1

Name	Initials	Student number	Retning
Alexander Nygaard Thomsen	AT	201911329	E

Due date: 4/10/2026

1 Problem 1

Consider a causal system given by the following system function

$$H(z) = 1 + 3.5z^{-1} + 1.5z^{-2}$$

And assume that the causal system is used as a model for a communication channel that will distort signals passing through it.

1.1 1.

Design an equalizer that can mitigate the distortion The system function is being described as causal, meaning that it cannot depend on future inputs, only on previous inputs $x[n], x[n-1], x[n-2], \dots$. In non-minimum-phase systems, the distortion from systems $H(z)$ can be *undone* by cascading an equalizer, or filter, with the system function, such that when multiplied by its inverse, its effects will be undone. $H(z)H_{inv}(z) = 1$. From the given system function, the zeros and poles can be extracted. A stable and causal system, should have poles inside the unit circle, but the zeros does not need to be. To find out what kind of equalizer we should construct, we can firstly analyze our system to find these.

$$H(z) = 1 + 3.5z^{-1} + 1.5z^{-2} \Rightarrow H(z)z^2 = z^2 + 3.5z^1 + 1.5 \Rightarrow H(z) = \frac{z^2 + 3.5z^1 + 1.5}{z^2}$$

rewritten as

$$\frac{(z+3)(z+0.5)}{z^2}$$

yielding zeroes in: $z = -3, z = -0.5$. Here one zero lies within the unit circle, while the other does not. This is not a problem for the original system.

Our equalizer should ideally be an inverse of the original system, such that

$$H_{inv} = \frac{1}{H(z)} = \frac{A(z)}{B(z)}$$

such that

$$H(z) = \frac{B(z)}{A(z)}$$

however because of this, the zeroes from the original becomes the poles, which now resides outside the unit circle making it unstable. Therefore we must decompose this system into a minimum-phase system and an allpass system.

$$H(z) = H_{min}(z)H_{ap}(z)$$

taking the deduced system function from earlier, this can be rewritten into an expression, that can be made into a system function that will be composed of our minimum-phase and all-pass systems

$$H(z) = \frac{(z+3)(z+0.5)}{z^2} \Rightarrow \frac{z+0.5}{z} \frac{z+3}{z} \Rightarrow (1+0.5z^{-1})(1+3z^{-1})$$

In this case, we have a zero $z = -3$ outside the unit circuit, and $z = \frac{1}{a}, |a| < 1 \Rightarrow a = -\frac{1}{3}$ The composition can be written as:

$$H(z) = H_1(z) \underbrace{(1 - az^{-1})}_{\text{minimum-phase factor}} \underbrace{\frac{z^{-1} - a^*}{1 - az^{-1}}}_{\text{All-pass factor}}$$

$\Downarrow$

$$H(z) = 3(1+0.5z^{-1})(1+\frac{1}{3}z^{-1})\frac{z^{-1}+\frac{1}{3}}{1+\frac{1}{3}z^{-1}}$$

Where $H_1(z) = (1 + 0.5z^{-1})$ and the additional factor of 3, added to the front of $H_1(z)$ is the scale factor, which the magnitude of a.

cleaning up the expressiong yields:

$$H(z) = 3(1 + 0.5z^{-1})(z^{-1} + \frac{1}{3})$$

All-pass filters affect phase, but not magnitude, therefore we can construct our filter as

$$H_{eq}(z) = \frac{1}{H_{min}} = \frac{1}{3(1 + 0.5z^{-1})(1 + \frac{1}{3}z^{-1})}$$

As mentioned ealier, there is a relationship between the input system, the minimum phase and the all pass function. Since we have the inverse of the minimum phase, we can multiply the equalizer with the input system and then get the all pass function.

$$\begin{aligned} H(z)H_{eq}(z) &= 3(1 + 0.5z^{-1})(1 + \frac{1}{3}z^{-1}) \frac{z^{-1} + \frac{1}{3}}{1 + \frac{1}{3}z^{-1}} \cdot \frac{1}{3(1 + 0.5z^{-1})(1 + \frac{1}{3}z^{-1})} \\ &\Downarrow \\ &= \frac{3(1 + 0.5z^{-1})(z^{-1} + \frac{1}{3})}{3(1 + 0.5z^{-1})(1 + \frac{1}{3}z^{-1})} \\ &\Downarrow \\ &= \frac{(z^{-1} + \frac{1}{3})}{(1 + \frac{1}{3}z^{-1})} = H_{ap}(z) \end{aligned}$$

And this expression is equal to our allpass system.

The magnitude- and phasereponse is shown below

1.2 2.

Make a time-domain simulation of the system and the equalizer using a test signal of your choice. Explain the choice of test signal and procedures .. analyze the performance of the equalizer

A good test signal for the system, with the equalizer, would be a squarewave signal as it contains its fundamental frequency, as well as, essentially, infinitely many odd harmonics thereof. We'll select a signal with frequency of $f = 2kHz$ and a sampling rate $f_s = 48kHz$

1.3 3.

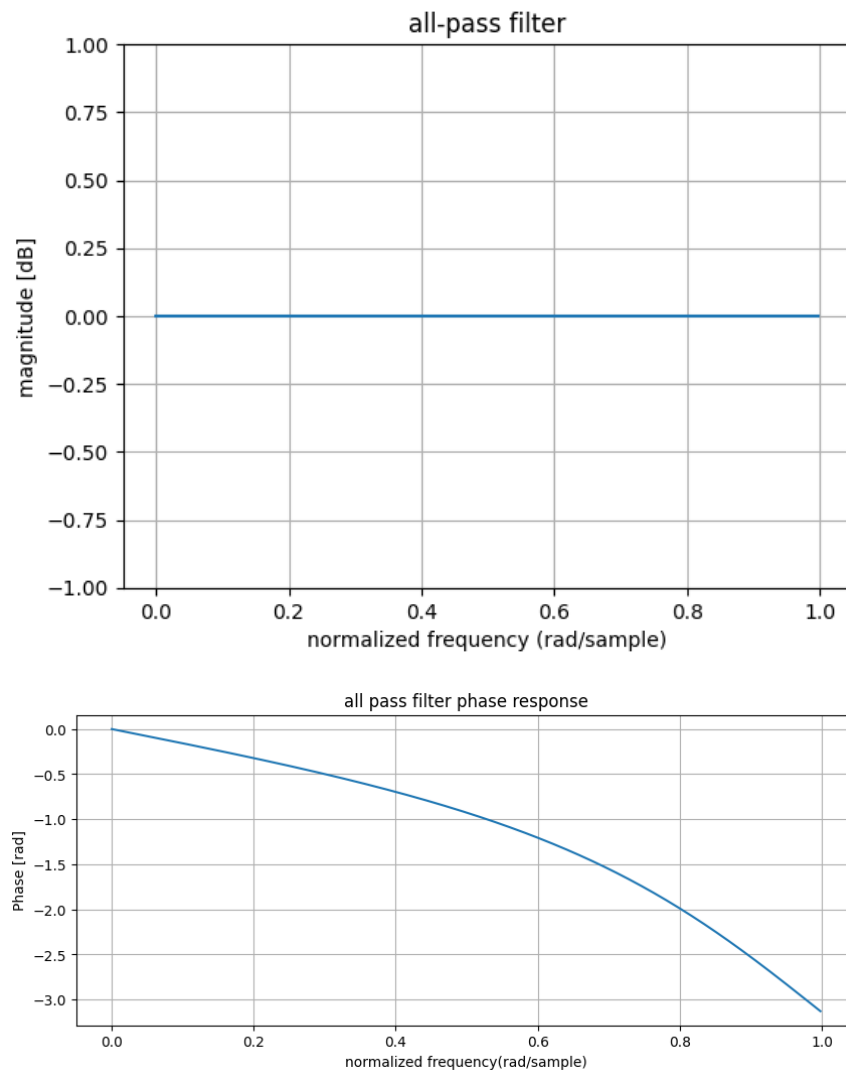


Figure 1: magnitude and phasereponse of the deduced all-pass filter

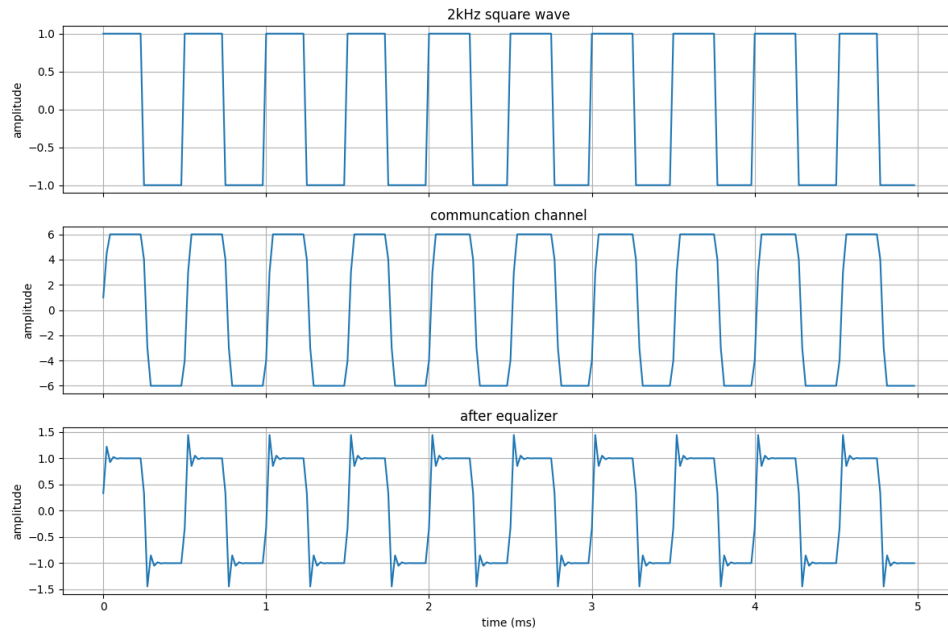


Figure 2: 2kHz testsignal, passed through, first the communcation channel and the through the equalizer. Note the slight overshoot of the signal edges from the rise and fall times.

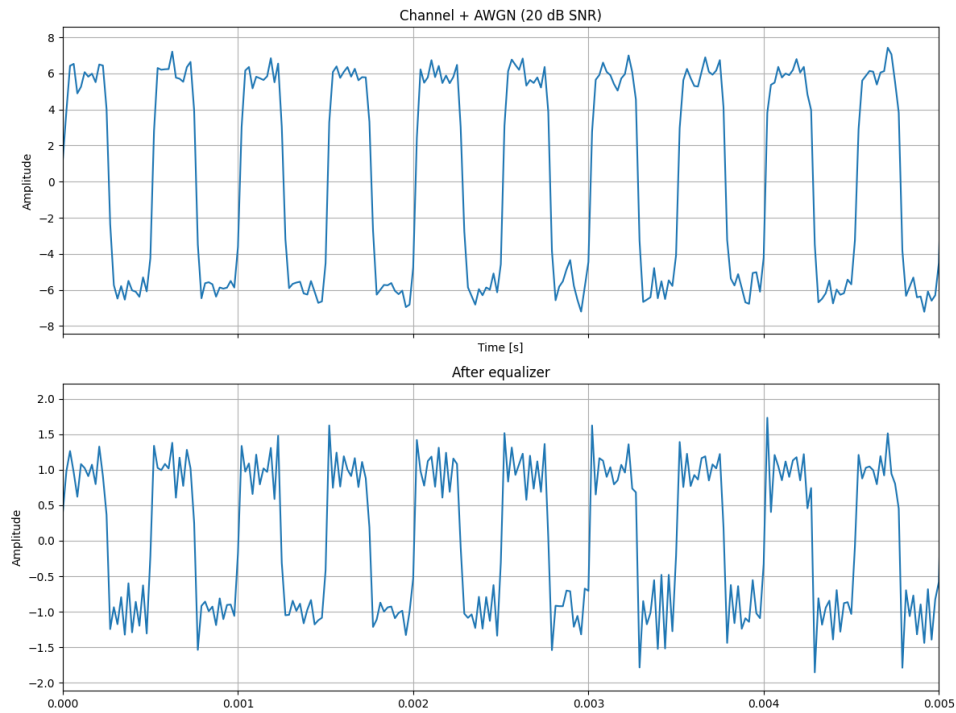


Figure 3: white gaussian noise added after the communcation channel, in this case the noise is 20dB SNR. Before the eq, the signal waveform can easily be made out, however after the eq, some sharpness has been retained in the rise and falling edges, however distortion is still present.

2 Problem 2

Consider the random process $x[n]$ created as $x[n] = 4w[n] - 2w[n - 3]$ Where $w[n]$ is unit variance white Gaussian noise.

2.1 1.

Compute an analytic expression for the autocorrelation $r_{xx}[l]$

The definition of the autocorrelation, how a signal correlates to itself, takes the form of

$$r_{xx}[l] = \mathbf{E}\{x[n]x[n-l]\}$$

Inserting the given expression of $x[n]$ into the autocorrelation definition yields a rather length expression:

$$r_{xx}[l] = \mathbf{E}\{(4w[n] - 2w[n - 3]) \cdot (4w[n-l] - 2w[n-l-3])\}$$

expanding

$$r_{xx}[l] = \mathbf{E}\{16w[n]w[n-l] - 8w[n]w[n-l-3] - 8w[n-3]w[n-l] + 4w[n-3]w[n-l-3]\}$$

Since $w[n]$ is described as being zero unit variance white gaussian noise, we also make the assumption that the noise is zero-mean, thus, there is no positive or negative bias. Unit variance meaning that the variance $\sigma^2 = 1$. Because of this, we can write the definition of the autocorrelation of white noise

$$\mathbf{E}\{x[n]x[n-l]\} = \sigma^2\delta[l]$$

we can then apply this rule to every expectation and move the coefficients to each term, and making makes the difference between each sample index equal to zero. essentially we want the delta function to become zero and it follows the rule:

$$\delta[l] = \begin{cases} \sigma^2, & \text{if } l = 0 \\ 0, & \text{if } l \neq 0 \end{cases}$$

first term:

$$16\mathbf{E}\{w[n]w[n-l]\} = \delta[l] \Rightarrow 16\delta[l]$$

$$\text{second term: } n = n-l-3 \Rightarrow l = -3 \Rightarrow \delta[l+3]$$

$$-8\mathbf{E}\{w[n]w[n-l-3]\} = \delta[l] \Rightarrow -8\delta[l+3]$$

$$\text{third term: } n-3 = n-l \Rightarrow l = 3$$

$$-8\mathbf{E}\{w[n-3]w[n-l]\} = \delta[l] \Rightarrow -8\delta[l-3]$$

$$\text{fourth term: } n-3 = n-l-3 \Rightarrow l = 0$$

$$4\mathbf{E}\{w[n-3]w[n-l-3]\} = 4\delta[l]$$

Combining the terms:

$$r_{xx}[l] = 20\delta[l] - 8\delta[l+3] - 8\delta[l-3]$$

This leads to the autocorrelation:

$$r_{xx}[l] = \begin{cases} 20, & l = 0 \\ -8, & l = \pm 3 \\ 0, & \text{otherwise} \end{cases}$$

2.2 2.

Plot the power spectral density of the random process. What can be learned from the plot? The PSD of a stationary random signal, is the fourier transform of the autocorrelation, which shows the distribution of power as a function of frequency. It can be calculated using:

$$S_{xx}(e^{j\omega}) = \sum_{l=-\infty}^{\infty} r_{xx}[l]e^{-jl\omega}$$

If this is applied to r_{xx} from before, we can see that we only have conditions for l in 3 cases, all other cases the summation term becomes zero. Thus it can be expressed as:

$$S_{xx}(e^{j\omega}) = r_{xx}[-3]e^{-j(-3)\omega} + r_{xx}[-0]e^{-j0\omega} + r_{xx}[3]e^{-j3\omega}$$

$$\Downarrow$$

$$= 20e^{j0\omega} - 8e^{-j(-3)\omega} - 8e^{-j3\omega}$$

$$\Downarrow$$

$$= 20 - 8e^{j3\omega} - 8e^{-j3\omega}$$


this can be rewritten using euler identities relating euler complex functions to sinusoids.

$$= 20 - 8(e^{j3\omega} + e^{-j3\omega})$$

$$\Downarrow$$

$$= 20 - 8(\cos(3\omega) + j\sin(3\omega) + \cos(3\omega) - j\sin(3\omega)) \Rightarrow 20 - 8(2\cos(3\omega)) \Rightarrow 20 - 16\cos(3\omega)$$

which can be plotted:

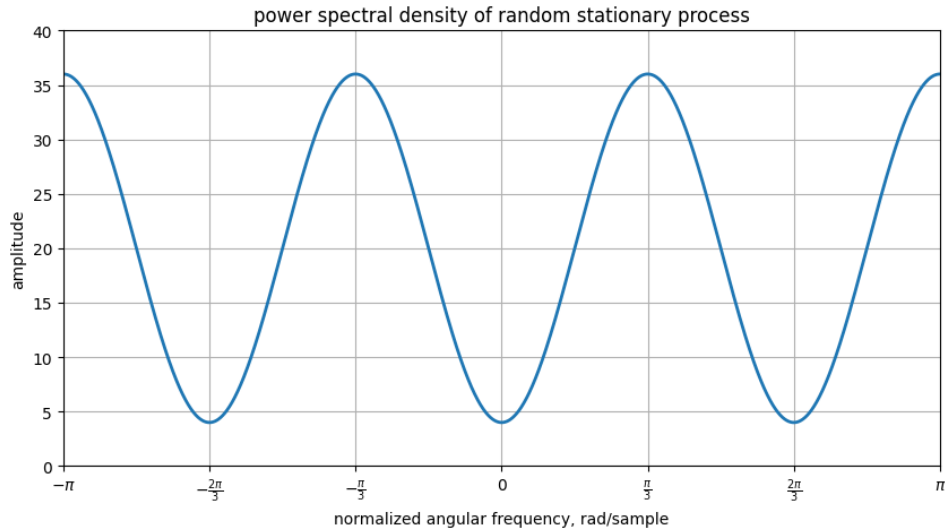

2.3 3.

Assume $x[n]$ is filtered through a FIR filter with $H(z) = 5 + z^{-1}$

Compute the analytical expressions for $r_{yx}[l]$ and $r_{yy}[l]$

Firstly, were given the filter in the z-domain, where the filter essentially tells us "take the current samples and multiply by 5 and add it to the previous input sample" this can be constructed as

$$y[n] = 5x[n] + x[n-1]$$

Is then possible to our definition of $x[n]$ into this filter and for the second term shift all n-samples by 1

$$y[n] = 5\{4w[n] - 2w[n - 3]\} + \{4w[n - 1] - 2w[n - 4]\} \Rightarrow 20w[n] + 4w[n - 1] - 10w[n - 3] - 2w[n - 4]$$

To find r_{yx} , which is the cross-correlation, between y and x, meaning how much two signals are alike when shifted relative to eachother, has the definition:

$$y_{yx}[l] = \mathbf{E}\{y[n]x[n - l]\}$$

It is then possible to substitute the filter function into the ALTERNATIVT Firstly, were given the filter in the z-domain, where the filter essentially tells us *"take the current samples and multiply by 5 and add it to the previous input sample"* which has the impulse response as

$$h[l] = 5\delta[l] + \delta[l - 1]$$

It is then possible to use the formula described in (13.100)

$$r_{yx}[l] = h[l] * r_{xx}[l]$$

where $*$ is the mathematical operation *convolution*.

SIDE 804-805 I BOGEN

3 problem 3

Let a signal and interpolation kernel be given by


$$x[n] = \begin{cases} 2, & n = 0 \\ 1, & n = 1 \\ 0, & \text{elsewhere} \end{cases}$$

$$g[n] = \begin{cases} -1, & n = -1 \\ 3, & n = 0 \\ -1, & n = 1 \\ 0, & \text{elsewhere} \end{cases}$$

3.1 1.

Upsample $x[n]$ by a factor 3 and sketch the upsampled signal. Here we upsample the signal by inserting two zeroes between every original sample. There the first sample is 2 and the second is 1, we then insert two zeroes in between.

$$x[n] = [2, 1, 0, 0] \Rightarrow [2, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0, 0]$$

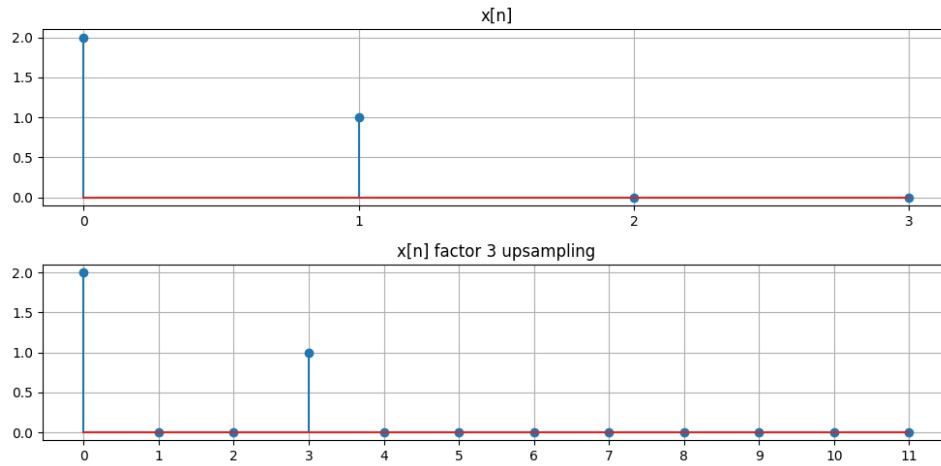

3.2 2.

Compute the interpolated values $x_I[1]$ and $x_I[2]$ using first linear interpolation and second the proposed $g[n]$ kernel. To implement the linear interpolation scheme, we use the formula for the general interpolation:

$$x_I[n] = \sum_{m=-\infty}^{\infty} x[m]g_r[n - mI]$$

In our case we only have $x[0] = 2$ and $x[1] = 1$, so only $m = 0$ and 1 contributes. And uses the kernel

$$g_{lin} = \begin{cases} 1 - \frac{|n|}{l}, & -l < n < l \\ 0, & \text{otherwise} \end{cases}$$

Substituting this into the interpolation formula:

$$x_I[n] = 2g_r[n] + 1 \cdot g_r[n - 3]$$

The ideal interpolation is from negative to positive infinity, however this is impractical and impossible. The practical approach is to only do it from all the original samples $x[n]$, left and right of the current sample. Thus when we build our linear interpretation kernel from the cases above, we have to extend the range in both directions. Our kernel values become:


$$g_{lin}[0] = 1, \quad g_{lin}[\pm 1] = 1 - \frac{1}{3} = \frac{2}{3}, \quad g_{lin}[\pm 2] = 1 - \frac{2}{3} = \frac{1}{3}, \quad g_{lin}[\pm 3] = 0$$

leading to:

n	-3	-2	-1	0	1	2	3
$g_{lin}[n]$	0	$\frac{1}{3}$	$\frac{2}{3}$	1	$\frac{2}{3}$	$\frac{1}{3}$	0

Our original sequence was $x[n]$, and when linearly interpolated, becomes:

$$x_I[0] = 2, \quad x_I[1] = \frac{5}{3}, \quad x_I[2] = \frac{4}{3}, \quad x_I[3] = 1, \quad x_I[4] = \frac{2}{3}, \quad x_I[5] = \frac{1}{3}, \quad x_I[6] = 0$$

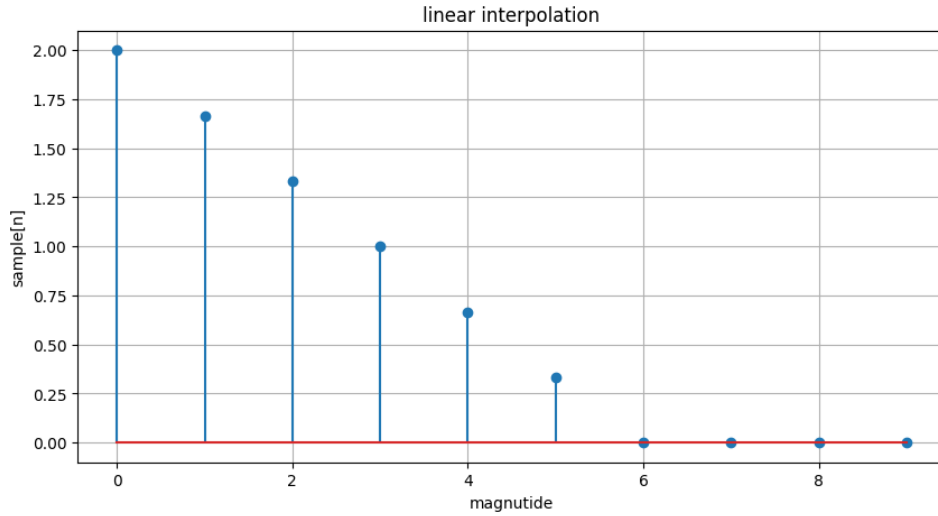

As for the proposed interpolation kernel $g[n] \Rightarrow g_p[n]$, renamed for convenience. Starting from the same interpolation formula:

$$x_p[n] = 2g_p[n] + g_p[n-3]$$

$$x_p[-1] = 2g_p[-1] + g_p[-1-3] = 2(-1) + 0 = -2, \quad x_p[0] = 2g_p[0] + g_p[0-3] = 2(3) + 0 = 6, \quad x_p[1] = 2g_p[1] + g_p[1-3] = 2(-1) +$$

$$x_p[2] = 2g_p[2] + g_p[2-3] = 2(0) + (-1) = -1, \quad x_p[3] = 2g_p[3] + g_p[3-3] = 2(0) + 3 = 5, \quad x_p[4] = 2g_p[4] + g_p[4-3] = 2(0) + (-1) =$$

$$x_p[5] = 2g_p[5] + g_p[5-3] = 0 + 0 = 0,$$

leading to:

$$x_I[-1] = -2, \quad x_I[0] = 6, \quad x_I[1] = -2, \quad x_I[2] = -1, \quad x_I[3] = 5, \quad x_I[4] = -1, \quad x_I[5] = 0,$$

3.3 3.

