


On the Subject of Morse-A-Maze-Swap

Wait what? Now the status light is even more lost.



- Decode the Morse code from the blinking status light. Off state is green, On state is red.**
- The first thing transmitted is the cyan maze word.
- The second thing transmitted is the magenta maze word.
- The third thing transmitted is the coordinates the status light needs to be placed on. Coordinates are a letter from A-F, representing columns, followed by a number from 1-6, representing rows. The upper left is A1.
- If the word is listed in Table 1, use the corresponding information in the table to determine which maze to look up. If the number you get is greater than 18, keep subtracting 18 until you are in the range of 0-17.
- Otherwise, look up the word in Tables 2 and 3.
- **Warning:** Do not cross the lines shown in the maze. These lines are invisible on the bomb. The wall colors determine your current maze.
- If there is an unlit BOB indicator and 4 batteries in 3 holders in the configuration of 2×AA and 2×D, Bob will actively prevent you from earning any strikes. Thanks Bob.

Table 1: (There are 36 entirely new words that fill all of these tables.)

*	<ul style="list-style-type: none"> • If any two-factor widgets are present, use the sum of the 2nd least significant digit of each two-factor code. • Otherwise, use the number of unsolved modules. 		
*	Number of solved modules	*	Number of strikes
	Number of battery holders		Number of unique ports
	Total number of ports		Number of lit indicators
	Number of unlit indicators		Number of indicators
	Number of port plates		The last digit of the serial number
	The sum of the serial number digits		Number of batteries
	First serial number digit		Starting time in minutes
	Day of week at bomb start (Sunday = 0, Saturday = 6).		Number of empty port plates
	Position of first serial number letter minus one (A=0, B=1, C=2, ...)		

* - The maze for these words can change.

** - Refer to page 4 for some configuration options.

Table 2:

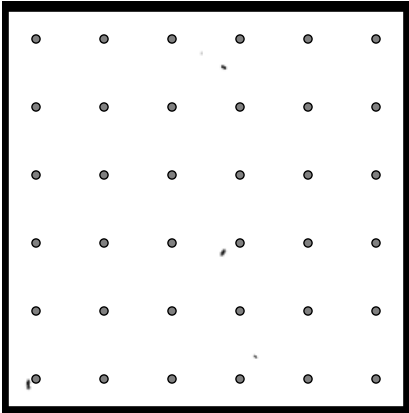
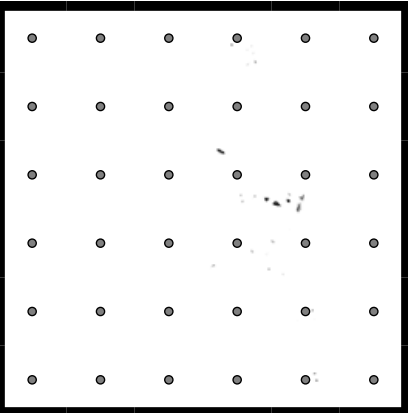
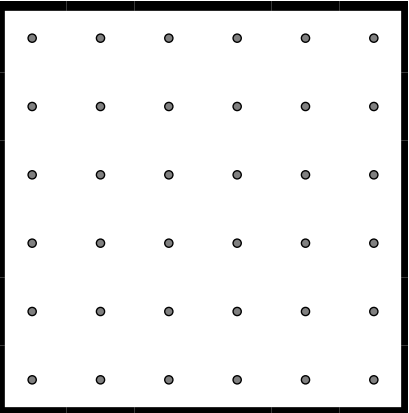
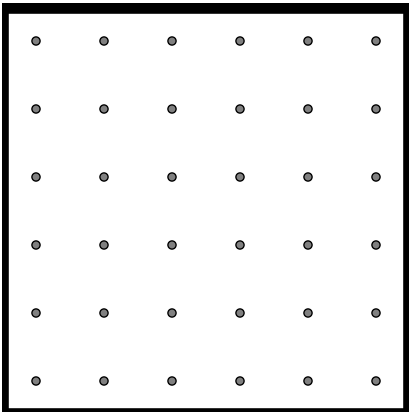
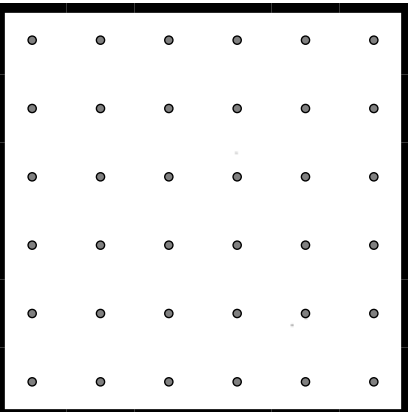
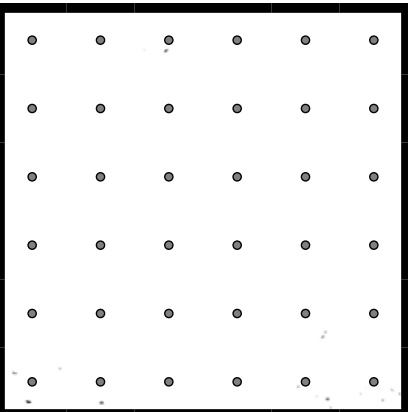
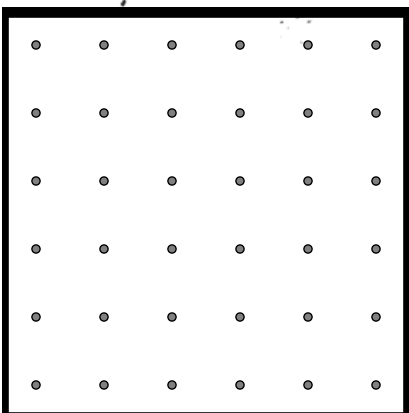
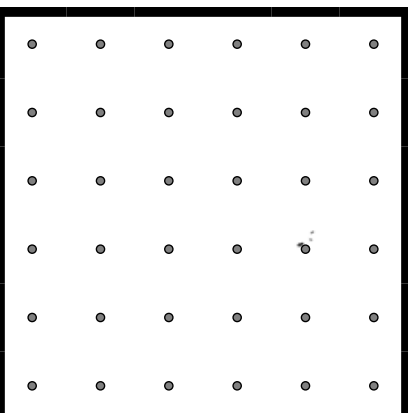
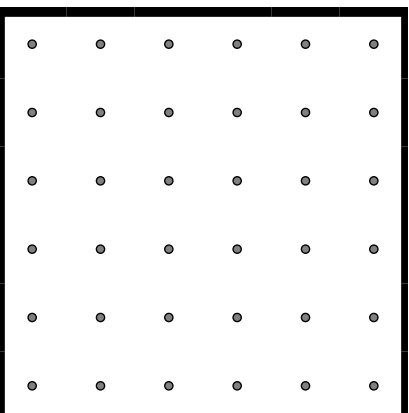
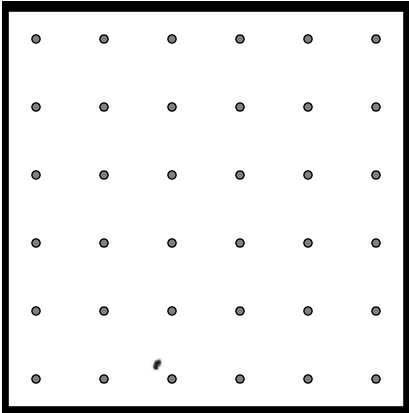
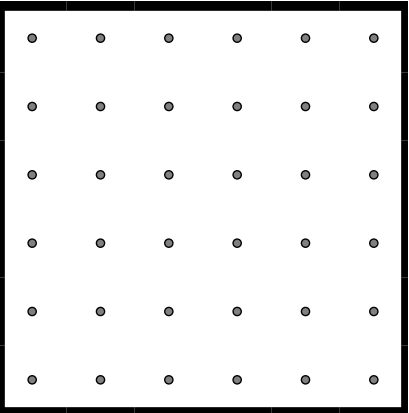
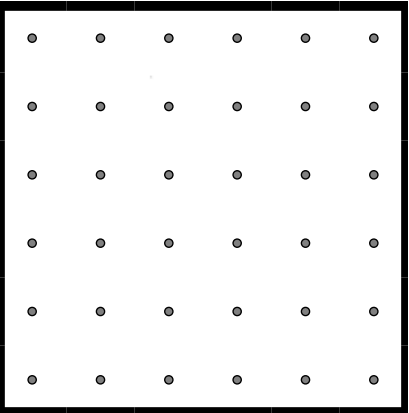
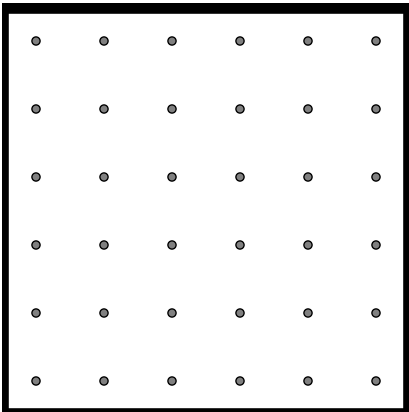
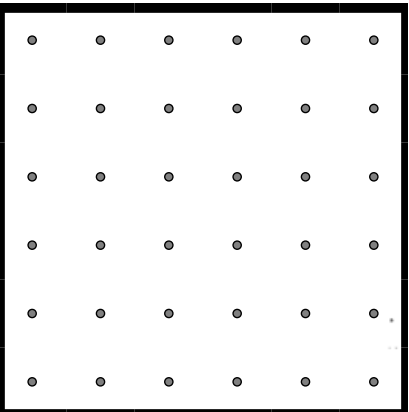
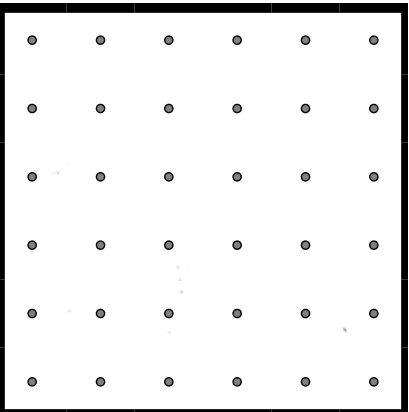
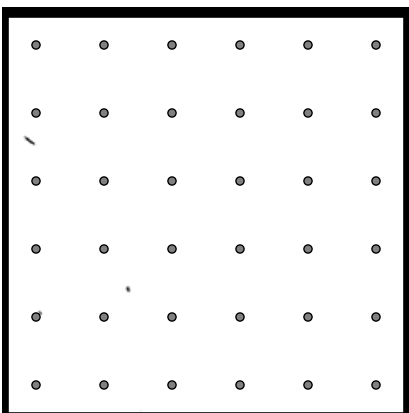
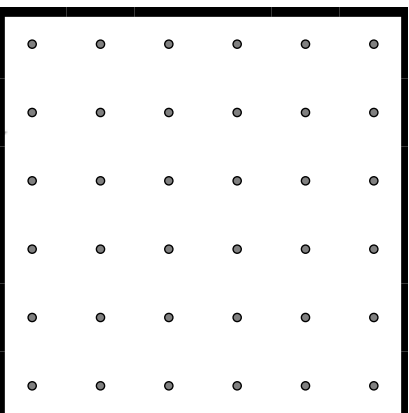
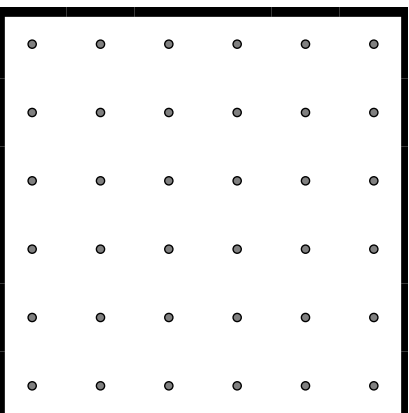
0 - 	1 - 	2 - 
3 - 	4 - 	5 - 
6 - 	7 - 	8 - 

Table 3:

9 - 	10 - 	11 - 
12 - 	13 - 	14 - 
15 - 	16 - 	17 - 

How to Interpret

1. A short flash represents a dot.
2. A long flash represents a dash.
3. There is a long gap between letters.
4. There is a very long gap before the word repeats.

A	• ■■■	U	• • ■■■
B	■■■ • • •	V	• • • ■■■
C	■■■ • ■■■ •	W	• ■■■ ■■■
D	■■■ • •	X	■■■ • • ■■■
E	•	Y	■■■ • ■■■ ■■■
F	• • ■■■ •	Z	■■■ ■■■ • •
G	■■■ ■■■ •		
H	• • • •		
I	• •		
J	• ■■■ ■■■ ■■■		
K	■■■ • ■■■	1	• ■■■ ■■■ ■■■ ■■■
L	• ■■■ • •	2	• • ■■■ ■■■ ■■■
M	■■■ ■■■	3	• • • ■■■ ■■■
N	■■■ •	4	• • • • ■■■
O	■■■ ■■■ ■■■	5	• • • • •
P	• ■■■ ■■■ •	6	■■■ • • • •
Q	■■■ ■■■ • ■■■	7	■■■ ■■■ • • •
R	• ■■■ •	8	■■■ ■■■ ■■■ • •
S	• • •	9	■■■ ■■■ ■■■ ■■■ •
T	■■■	0	■■■ ■■■ ■■■ ■■■ ■■■

Configuration Options for MorseAMaze-settings.txt

It is possible to change the colors of the status light for the various states of the module. The following colors are possible.

- 0 - Off
- 1 - Green
- 2 - Red
- 3 - Random

These are the options that can be configured, and their default values.

- **SolvedState** - The state the status light changes to once the module is solved. (default: **Off**)
- **StrikeState** - The state the status light changes to for one second when a strike is earned. (default: **Off**)
- **OffState** - The off state of the status light while morse code is being transmitted. (default: **Green**)
- **MorseXmitState** - The on state of the status light while morse code is being transmitted. (default: **Red**)

Finally, if you wish to reset everything back to default, just change "ResetToDefault" from false to true