# Lane Keeping Assist System(LKAS)

Applied Automatic Control
Advanced Automotive Engineering
Electronic Engineering for Intelligent Vehicles

University of Bologna

**A.A. 2025–2026**

Kartik Purushottam Kanchan and Edoardo Guglielmi

**January 19, 2026**

# Contents

**1 Introduction** **4**

**2 Vehicle Model and System Description** **5**
2.1 Equation for state . . . . . 6
2.2 Model and Problem Formulation . . . . . 7

**3 State Space and Linearization** **7**
3.1 Linearization . . . . . 9
3.2 Stability and Eigenvalue Analysis . . . . . 10
3.3 Implications for Stability and Control . . . . . 12

**4 Structural Properties of the LKAS Model** **13**
4.1 Controllability Analysis . . . . . 13
4.2 Observability Analysis . . . . . 14

**5 State-Feedback Control Design** **16**
5.1 LQR State-Feedback with Integral Action . . . . . 16
5.2 State Observer Design via Kalman Filter . . . . . 18
5.3 Control Architecture Overview . . . . . 22

**6 Feedforward** **22**

**7 Simulation Results** **23**
7.1 Plot Analysis . . . . . 23

**8 Future Improvements** **27**

# Abstract

This project for the Applied Automatic Control course is based on the IEEE paper "A Comprehensive Predictive Control for Lane Keeping Assistance Systems." The vehicle dynamics are represented using a two-degree-of-freedom bicycle model provided in the reference study. The lane-keeping control strategy relies exclusively on information obtained from a forward-looking camera, which provides lane-related measurements such as lateral displacement, heading error, and road curvature. Using these camera-based signals as inputs, a feedback control approach derived from classical control techniques studied in the course is implemented to minimize tracking errors and ensure accurate path following in the presence of disturbances. By compensating for vehicle lateral dynamics using vision-based feedback only, the proposed strategy reduces driver workload while improving ride comfort and safety. Simulation results demonstrate the effectiveness of the implemented controller in maintaining lane tracking performance and vehicle stability.

# 1 Introduction

Road safety relies on a combination of regulations, driver awareness, and onboard technologies aimed at reducing accidents before they occur. In recent years, vehicle manufacturers and public authorities have increasingly focused on systems that support the driver during critical driving tasks. Active safety functions such as ABS, ESC, emergency braking, and lane assistance act directly on the vehicle to limit unsafe situations, often compensating for distraction, fatigue, or delayed reactions. Within this context, lane assistance plays a key role in lateral vehicle control, especially on long trips and high-workload road segments.

The Lane Keeping Assist System supports the driver by monitoring lane boundaries through onboard sensors and applying small steering corrections to keep the vehicle centered. Its effectiveness, however, is strongly influenced by sensor reliability, environmental conditions, and the quality of the control strategy. Poor visibility, degraded road markings, or overly aggressive steering actions can reduce comfort and lead to system deactivation. For this reason, control design remains a central challenge. This report investigates Control for LKAS, focusing on its ability to handle constraints, anticipate vehicle behavior, and achieve smooth, reliable lane keeping under realistic operating conditions.

Lane Keeping Assist System (LKAS) solutions detect unintentional lane drift by adjusting the steering to keep the vehicle within its lane. A forward-looking camera serves as a sensor input for LKAS, detecting lines and lane features. Information from the car driving scene, such as lateral offset, heading angle, lane curvature, etc., is retrieved and forwarded to the LKAS controller. This information is used to make subtle adjustments to maintain the vehicle in the middle of the detected lane. Additional inputs, such as sidelight activation and hands on the steering wheel, are checked to avoid unauthorized vehicle intervention.

LKAS provides a more confident driving experience on narrow roadways. It often reduces unintentional lane departure resulting from driver fatigue, high workload, momentary distraction, or somnolence.Through an adaptive learning mechanism, LKAS adjusts itself, taking into account the driver's style and avoiding potential conflicts between steering actuation and driver intervention. LKAS proves particularly useful in long trips or heavy traffic conditions.

## 2 Vehicle Model and System Description

The lateral vehicle dynamics will be fully described using a two-degree-of-freedom (2-DOF) bicycle model (see Figure 1 taken from A Comprehensive Analysis of Model Predictive Control for Lane Keeping Assist System).The model in this paper is simplified, by making certain assumptions that have been made, that includes, the exclusion of roll and pitch dynamics, and the use of small angles and constant longitudinal speed. In such scenarios, the assumption of linearity in the bicycle model may no longer be valid. However, concerning LKAS, simplifying model conditions doesn't considerably interfere with the vehicle model behaviour. This is primarily because, in most cases, the vehicle dynamics operate within a linear operating zone, that reduce impact of model simplification.

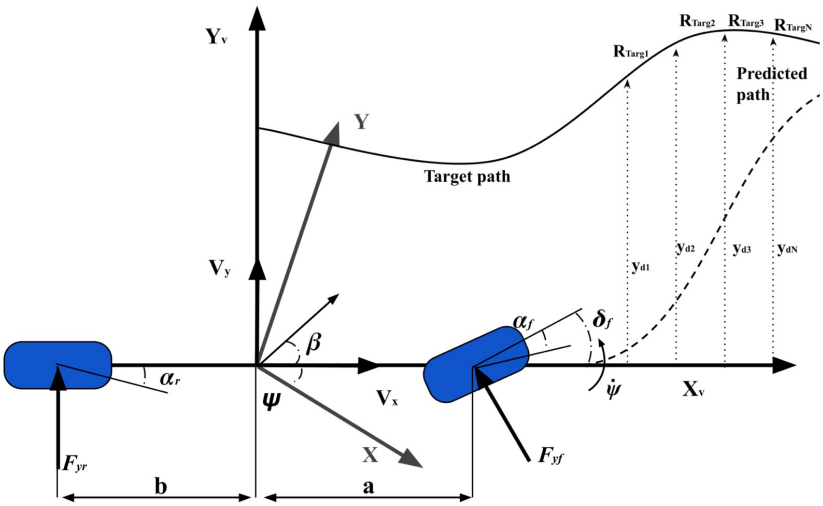


Figure 1: Bicycle vehicle model

The main parameters table below describe in details all the variables used:

## Table of main parameters

Table 1: Vehicle Parameters

| Symbol | Description | Value |
|---|---|---|
| $m$ | Vehicle body mass | 1573 kg |
| $I_z$ | Moment of inertia around z-axis | 2873 kg m$^2$ |
| $a$ | front axles distance from CG | 1.1 m |
| $b$ | rear axles distance from CG | 1.58 m |
| $C_{\alpha_f}$ | Front cornering stiffness | 80.000 N/m |
| $C_{\alpha_r}$ | Rear cornering stiffness | 80.000 N/m |
| $V_x$ | Logitudinal vehicle speed | 16.667 m/s |

## 2.1 Equation for state

The lateral vehicle position and yaw angle are represented by 2-DOF model and are derived from the following differential equation:

$$\begin{aligned} ma_y &= -mv_x\dot{\psi} + F_{Fy} + F_{Ry} \\ I_z\ddot{\psi} &= l_f F_{Fy} - l_r F_{Ry} \end{aligned} \tag{1}$$

The vehicle heading or yaw angle evolves according to the yaw angular velocity about the vertical z-axis. Therefore, the yaw rate is introduced as:

$$\dot{\psi} = r_\omega \tag{2}$$

substitute equation (1) with: $a_y = \dot{v_y}$ and $\dot{\psi} = r_\omega$

$$\begin{aligned} m\dot{v_y} &= -mv_x\dot{\psi} + F_{Fy} + F_{Ry} \\ I_z\dot{r_\omega} &= aF_{Fy} - bF_{Ry} \end{aligned} \tag{3}$$

Where $m$ represents the vehicle mass;$\psi$,$\dot{\psi}$ and $\ddot{\psi}$ devote the yaw angle, speed and acceleration about the z-axis at the center of gravity (CG) of the vehicle; $a_y$ represents the lateral acceleration; $v_y$ represents the lateral velocity; $v_x$ is the longitudinal vehicle speed. The lateral tire force $F_{Fy}$ and $F_{Ry}$ can be expressed by following equation:

$$\begin{aligned} F_{Fy} &= 2C_{\alpha_f}\alpha_f \\ F_{Ry} &= 2C_{\alpha_r}\alpha_r \end{aligned} \tag{4}$$

In the following expressions, the slip angle ($\alpha$) is crucial for computing the wheel direction and the true vehicle motion. The front ($\alpha_f$) and rear ($\alpha_r$) slip angles are defined as follows, where the front axle is actuated by the steering input $\delta$:

$$\alpha_f = \delta - \frac{v_y + a\dot{\psi}}{v_x}; \qquad \alpha_r = -\frac{v_y - b\dot{\psi}}{v_x}. \tag{5}$$

The following equation describes the lateral kinematic relationship of the vehicle, where $y_d$ denotes the lateral displacement and its time derivative represents the lateral velocity governing the motion required to reduce the deviation between the actual vehicle path and the reference lane.

$$\dot{y_d} = v_y + v_x\psi \tag{6}$$

## 2.2 Model and Problem Formulation

Using the above-mentioned equations (2), (3), and (6), the system is represented in state-space form with the state vector defined as:

$$x = \begin{bmatrix} v_y \\ r_\omega \\ \psi \\ y_d \end{bmatrix}; \qquad u = \delta; \qquad d = \begin{bmatrix} C_{\alpha_f} \\ C_{\alpha_r} \end{bmatrix}; \qquad w = \begin{bmatrix} d \\ \nu \\ r \end{bmatrix} \tag{7}$$

Here:

- $x$ is the state vector, that consist of lateral velocity $v_y$, yaw rate $r_\omega$, heading angle $\psi$, and lateral position $y_d$.
- $u$ is the control input vector containing the steering angle $\delta$ at front axle.
- $\nu$ represents sensor noise of camera used to find lateral displacement $y_d$.
- $d$ is the disturbance vector, representing external inputs such as cornering stiffness.
- $w$ is the complete vector of exogenous signals, including disturbances, noise, and the reference in this case path.

# 3 State Space and Linearization

Considering oriented model we can define:
$\dot{x} = f(x, u, w)$; $y = h(x, u, w)$; $e = h_e(x, u, w)$
where:

- $x : \mathbb{R} \to \mathbb{R}^n$, with $n \in \mathbb{N}$, called the state vector.

- $u : \mathbb{R} \to \mathbb{R}^p$, with $p \in \mathbb{N}$, called the control input vector.
- $w : \mathbb{R} \to \mathbb{R}^r$, with $r \in \mathbb{N}$, defined as $w := \mathrm{col}(d, \nu, r)$, called the vector of exogenous signals.
- $y : \mathbb{R} \to \mathbb{R}^q$, with $q \in \mathbb{N}$, called the measurement output vector.
- $e : \mathbb{R} \to \mathbb{R}^m$, with $m \in \mathbb{N}$, called the regulated output or error vector.
- $f : \mathbb{R}^n \times \mathbb{R}^p \times \mathbb{R}^r \to \mathbb{R}^n$, called the process state model.
- $h : \mathbb{R}^n \times \mathbb{R}^p \times \mathbb{R}^r \to \mathbb{R}^q$, called the output function.
- $h_e : \mathbb{R}^n \times \mathbb{R}^p \times \mathbb{R}^r \to \mathbb{R}^m$, called the error function.

Referring to the described model we will define our LKAS as follows:

$$f(x,u,w) = \begin{bmatrix} -\dfrac{2C_r\left(v_y - br_\omega\right)}{mv_x} + \dfrac{2C_f\left(u - \dfrac{v_y + ar_\omega}{v_x}\right)}{m} - v_x r_\omega \\ \dfrac{2aC_f\left(u - \dfrac{v_y + ar_\omega}{v_x}\right)}{I_z} + \dfrac{2bC_r\left(v_y - br_\omega\right)}{I_z v_x} \\ r_\omega \\ v_y + v_x\psi \end{bmatrix}$$

$$h(x,u,w) = \begin{bmatrix} y_d + \nu \end{bmatrix}$$

$$h_e(x,u,w) = \begin{bmatrix} y_d + \nu - r \end{bmatrix}$$

## 3.1 Linearization

Now, after finding process model, output function, and error function we will have to find $(x^\star, u^\star, w^\star)$ that is an equilibrium triplet if $f(x^\star, u^\star, w^\star) = 0$. Also, we need to find $y^\star := h(x^\star, u^\star, w^\star)$ and $e^\star := h_e(x^\star, u^\star, w^\star)$ the equilibrium output and equilibrium error. The equilibrium error $e^\star = 0$, usually considered from this we can determine:

$$\begin{aligned} e^\star := {y_d}^\star + \nu^\star - r^\star = 0 \\ \therefore {y_d}^\star = r^\star \end{aligned} \tag{8}$$

$$\dot{x}^\star = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0.1 \end{bmatrix}; \qquad u^\star = \begin{bmatrix} 0 \end{bmatrix}; \qquad w^\star = \begin{bmatrix} 80,000 \\ 80,000 \\ 0 \\ 0 \end{bmatrix}; \tag{9}$$

The result of equilibrium is achieved by using the known values in Table 1. Considering the equilibrium triplet we can define non- linear values of the states described above and then we can get the following equation.

$$\tilde{x}_{\mathrm{NL}} := x - x^\star; \qquad \tilde{u} := u - u^\star; \qquad \tilde{w} := w - w^\star; \qquad \tilde{y}_{\mathrm{NL}} := y - y^\star; \qquad \tilde{e}_{\mathrm{NL}} := e - e^\star \tag{10}$$

Finally, we can define design model as

$$\begin{aligned} \dot{\tilde{x}} &= A\tilde{x} + B_1\tilde{u} + B_2\tilde{w}, \qquad \tilde{x}(t_0) = \tilde{x}_0, \\ \tilde{y} &= C\tilde{x} + D_1\tilde{u} + D_2\tilde{w}, \\ \tilde{e} &= C_e\tilde{x} + D_{e1}\tilde{u} + D_{e2}\tilde{w}. \end{aligned} \tag{11}$$

where $A$, $B_1$, $B_2$, $C$, $D_1$, $D_2$, $C_e$, $D_{e1}$, and $D_{e2}$ are the Jacobian matrices obtained from linearization of the nonlinear process, output, and error functions at the

equilibrium point. The equation below defines the matrix according to our LKAS:

$$A = \begin{bmatrix} -\dfrac{2(C_f + C_r)}{mV_x} & -\dfrac{V_x m + \frac{2C_f a}{V_x} - \frac{2C_r b}{V_x}}{m} & 0 & 0 \\ -\dfrac{\frac{2C_f a}{V_x} - \frac{2C_r b}{V_x}}{I_z} & -\dfrac{\frac{2C_f a^2}{V_x} + \frac{2C_r b^2}{V_x}}{I_z} & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 1 & 0 & V_x & 0 \end{bmatrix};$$

$$B_1 = \begin{bmatrix} \dfrac{2C_f}{m} \\ \dfrac{2aC_f}{I_z} \\ 0 \\ 0 \end{bmatrix}; \qquad B_2 = \begin{bmatrix} \dfrac{2u - \frac{2(v_y + ar_\omega)}{V_x}}{m} & -\dfrac{2(v_y - br_\omega)}{mV_x} & 0 & 0 \\ \dfrac{2a\left(u - \frac{v_y + ar_\omega}{V_x}\right)}{I_z} & \dfrac{2b(v_y - br_\omega)}{I_z V_x} & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}; \tag{12}$$

$$C = \begin{bmatrix} 0 & 0 & 0 & 1 \end{bmatrix}; \qquad D_1 = 0; \qquad D_2 = \begin{bmatrix} 0 & 0 & 1 & 0 \end{bmatrix};$$

$$C_e = \begin{bmatrix} 0 & 0 & 0 & -1 \end{bmatrix}; \qquad D_{e1} = 0; \qquad D_{e2} = \begin{bmatrix} 0 & 0 & -1 & 1 \end{bmatrix}.$$

Finally after using the equilibrium values we get.

$$A = \begin{bmatrix} -12.2057 & -13.7376 & 0 & 0 \\ 1.6039 & -12.3845 & 0 & 0 \\ 0 & 1.0000 & 0 & 0 \\ 1.0000 & 0 & 16.6670 & 0 \end{bmatrix};$$

$$B_1 = \begin{bmatrix} 101.7165 \\ 61.2600 \\ 0 \\ 0 \end{bmatrix}; \qquad B_2 = \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}; \tag{13}$$

$$C = \begin{bmatrix} 0 & 0 & 0 & 1 \end{bmatrix}; \qquad D_1 = 0; \qquad D_2 = \begin{bmatrix} 0 & 0 & 1 & 0 \end{bmatrix};$$

$$C_e = \begin{bmatrix} 0 & 0 & 0 & -1 \end{bmatrix}; \qquad D_{e1} = 0; \qquad D_{e2} = \begin{bmatrix} 0 & 0 & -1 & 1 \end{bmatrix}.$$

The numerical values of the linearized system matrices are computed in MATLAB by substituting the nominal equilibrium parameters reported in Table 1, and the results are summarized in Equation (13).

## 3.2 Stability and Eigenvalue Analysis

The stability properties of the linearized LKAS model are first analyzed by inspecting the eigenvalues of the open-loop state matrix $A$. Using MATLAB, the

eigenvalues are:

$$\lambda(A) = \{0,\ 0,\ -12.2951 \pm j\,4.6931\}.$$

The presence of two eigenvalues at the origin indicates that the open-loop system is not asymptotically stable. This behavior is expected because two of the states are kinematic in nature and introduce integrator dynamics through the relations $\dot{\psi} = r_\omega$ and $\dot{y}_d = v_y + v_x\psi$. As a consequence, in the absence of steering control, the heading angle and lateral displacement may drift over time, motivating the need for closed-loop feedback control in lane-keeping applications.

Table 2: Eigenvalues of $A$ and qualitative interpretation (open-loop LKAS)

| Eigenvalues $\lambda = \sigma \pm j\omega$ | $\sigma$ | $\omega$ (rad/s) | Interpretation |
|---|---|---|---|
| 0 | 0 | 0 | Kinematic integrator subspace (drift in $\psi$ and $y_d$) |
| 0 | 0 | 0 | Kinematic integrator subspace (repeated zero eigenvalue) |
| $-12.2951 \pm j\,4.6931$ | $-12.2951$ | 4.6931 | Coupled lateral–yaw mode (dominant states: $v_y$, $r_\omega$) |

The open-loop eigenvalue spectrum consists of one complex conjugate pair with negative real part and two eigenvalues located at the origin. The complex conjugate eigenvalues

$$\lambda = -12.30 \pm j\,4.69$$

represent the intrinsic lateral vehicle dynamics, dominated by the interaction between lateral velocity $v_y$ and yaw rate $r_\omega$. The negative real part indicates inherent damping due to tire cornering stiffness, while the imaginary part corresponds to oscillatory lateral–yaw motion.
The two eigenvalues at the origin arise from the kinematic relations

$$\dot{\psi} = r_\omega, \qquad \dot{y}_d = v_y + v_x\psi,$$

which introduce integrator dynamics associated with the vehicle heading angle and lateral displacement. These modes do not reflect physical instability, but rather the absence of restoring forces in the kinematic states when no steering control is applied.

```

%% Eigen Mode Imapct in State Parameter
[V,D] = eig(Amatrix);

states = {'v_y','r_\omega','\psi','y_d'};
```

```
% normalize eigenvectors column-wise
Vn = V ./ max(abs(V),[],1);

for i=1:size(D,1)
fprintf('\nMode %d: lambda = %.4f %+.4fi\n', i, real(D(i,i)),
    imag(D(i,i)));
for j=1:length(states)
fprintf(' %-7s : %.3f\n', states{j}, abs(Vn(j,i)));
end
end

Mode 1: lambda = 0.0000 +0.0000i
v_y : 0.000
r_\omega : 0.000
\psi : 0.000
y_d : 1.000

Mode 2: lambda = 0.0000 +0.0000i
v_y : 0.000
r_\omega : 0.000
\psi : 0.000
y_d : 1.000

Mode 3: lambda = -12.2951 +4.6931i
v_y : 1.000
r_\omega : 0.342
\psi : 0.026
y_d : 0.071

Mode 4: lambda = -12.2951 -4.6931i
v_y : 1.000
r_\omega : 0.342
\psi : 0.026
y_d : 0.071
```

Listing 1: Eigenvector participation computation in MATLAB

### 3.3 Implications for Stability and Control

The presence of eigenvalues at the origin implies that the open-loop LKAS model is marginally stable and does not satisfy the Bounded-Input Bounded-State (BIBS) property. As a result, bounded disturbances or reference variations may lead to

unbounded growth of the heading angle and lateral displacement.
To ensure asymptotic stability and robust lane-keeping performance, feedback control with integral action is introduced. The resulting closed-loop augmented system shifts all eigenvalues into the left half-plane, guaranteeing exponential stability and BIBS robustness under bounded disturbances and reference inputs. From a robustness perspective, these eigenvalue properties have direct implications for the Bounded-Input Bounded-State (BIBS) property. The BIBS property states that if the input to a system is bounded, then the internal state remains bounded for all time. For linear time-invariant systems, BIBS stability is guaranteed if the system matrix is exponentially stable, i.e., if all eigenvalues have strictly negative real parts. In this case, the matrix exponential $\exp(At)$ is bounded, and the integral term

$$\int_0^t \| \exp(A(t-\tau))B \| \, \mathrm{d}\tau$$

remains finite for all $t \geq 0$. In the present LKAS model, the two eigenvalues at the origin violate the exponential stability condition. As a result, the open-loop system does not satisfy the BIBS property, and bounded disturbances or reference variations may lead to unbounded growth of the kinematic states. After applying state-feedback control with integral action, the closed-loop system matrix becomes exponentially stable, as all eigenvalues are shifted to the left half-plane. Therefore, the closed-loop LKAS satisfies the BIBS property, ensuring that bounded disturbances and reference inputs result in bounded state trajectories. This property guarantees robust lane-keeping behavior under bounded road curvature variations and measurement noise, which is a fundamental requirement for practical LKAS applications.

# 4 Structural Properties of the LKAS Model

## 4.1 Controllability Analysis

The control feasibility of the Lane Keeping Assist System (LKAS) was assessed by analyzing the controllability properties of the linearized vehicle model. These properties ensure that the steering input can effectively influence the lateral vehicle motion and that the system states can be reconstructed from the available camera-based measurements.
The controllability matrix $Rm, n$ of the linearized system was computed in MATLAB using the `ctrb` command. For improved numerical interpretation, the matrix was normalized column by column. The rank condition confirmed that the LKAS lateral dynamics are fully controllable, indicating that the steering input is sufficient to regulate the lateral velocity, yaw rate, heading angle, and lateral displacement

of the vehicle.
To account for integral action in the controller design, an augmented system was introduced. The augmented state-space matrices are defined as

$$A_e = \begin{bmatrix} A & 0 \\ C_e & 0 \end{bmatrix}, \qquad B_{1e} = \begin{bmatrix} B_1 \\ D_{e1} \end{bmatrix}. \tag{14}$$

The corresponding extended controllability matrix is given by

$$R_e = \mathrm{ctrb}(A_e, B_{1e}) = \begin{bmatrix} B_{1e} & A_e B_{1e} & A_e^2 B_{1e} & \cdots & A_e^{n+q-1} B_{1e} \end{bmatrix}, \tag{15}$$

where $n$ and $q$ denote the dimensions of the state and integral-error subsystems, respectively. The full rank of $R_e$ confirms that the augmented LKAS model is fully reachable, allowing the use of state-feedback control with integral action.

$$\mathbf{R} = 10^5 \begin{bmatrix} 0.0010 & -0.0208 & 0.3361 & -4.6562 \\ 0.0006 & -0.0060 & 0.0403 & 0.0394 \\ 0 & 0.0006 & -0.0060 & 0.0403 \\ 0 & 0.0010 & -0.0106 & 0.2368 \end{bmatrix} \tag{16}$$

```
>> R = ctrb(Amatrix, B1matrix);

if rank(R) == length(Amatrix)
    disp('(Amatrix,B1matrix) is fully reachable because rank(R)=n')
else
    disp('(Amatrix,B1matrix) is NOT fully reachable because rank(R)<n')
end
(Amatrix,B1matrix) is fully reachable because rank(R)=n
```

Figure 2: Reachability matrix rank

Since $\mathrm{rank}(\mathbf{R}) = 4$, which equals the system order, the pair $(A, B_1)$ is fully controllable (reachable).

## 4.2 Observability Analysis

Observability was evaluated by constructing the observability matrix

$$O = \begin{bmatrix} C \\ CA \\ CA^2 \\ \vdots \\ CA^{n-1} \end{bmatrix}, \tag{17}$$

which was normalized column by column for numerical robustness. The rank test verified that the observability matrix is full rank, demonstrating that the system states can be uniquely reconstructed from the camera-based lateral displacement measurement.
The observability matrix of the linearized LKAS model is reported below:

$$O = \begin{bmatrix} 0 & 0 & 0 & 1.0000 \\ 1.0000 & 0 & 16.6670 & 0 \\ -12.2057 & 2.9294 & 0 & 0 \\ 153.6782 & 131.3988 & 0 & 0 \end{bmatrix}. \tag{18}$$

Since $\text{rank}(O) = 4$ equals the system order, the pair $(A, C)$ is fully observable. Therefore, the LKAS states can be reconstructed from the camera-based lateral displacement measurement, enabling the design of a Kalman observer.

```
>> O = obsv(Amatrix, Cmatrix);

n = size(Amatrix,1);

if rank(O) == n
    disp('(A,C) is fully observable because rank(O) = n')
else
    disp('(A,C) is NOT fully observable because rank(O) < n')
end
(A,C) is fully observable because rank(O) = n
```

Figure 3: Rank of the observability matrix of the linearized LKAS model

Despite measuring only the lateral displacement through the camera, the rank condition confirms full observability. This guarantees that all system states, including yaw rate and heading angle, can be uniquely reconstructed using a Kalman observer.
These structural properties justify the observer-based control architecture adopted in this work. In the following sections, a state-feedback controller with integral action is designed using LQR techniques, followed by the synthesis of a Kalman observer and the evaluation of the closed-loop performance through simulation.

# 5 State-Feedback Control Design

## 5.1 LQR State-Feedback with Integral Action

The open-loop LKAS model exhibits marginally stable dynamics due to the kinematic relations associated with the heading angle and lateral displacement. As shown in Section 3.2, the presence of eigenvalues at the origin prevents the system from satisfying the Bounded-Input Bounded-State (BIBS) property. To guarantee robustness against constant disturbances and reference signals, integral action is introduced by augmenting the system with the integral of the tracking error.
The resulting augmented system $(A_e, B_{1e})$ is stabilizable, which ensures the existence of a state-feedback law with integral action capable of rendering the closed-loop system exponentially stable. Exponential stability of the augmented system directly implies BIBS stability, since the matrix exponential $\exp(A_{cl}t)$ is bounded and the disturbance response remains finite for all $t \geq 0$.
The LQR controller with integral action is implemented in MATLAB following the theoretical formulation described above. First, the augmented system matrices are constructed by extending the original state-space model with the integral of the tracking error:

$$A_e = \begin{bmatrix} A & 0 \\ C_e & 0 \end{bmatrix}, \qquad B_{1e} = \begin{bmatrix} B_1 \\ D_{e1} \end{bmatrix}.$$

To improve numerical conditioning and ensure a desired stability margin, a positive shift parameter $\alpha$ is introduced, yielding the modified system matrix

$$A_m = A_e + \alpha I.$$

The control input constraint is taken into account by defining the weighting matrix

$$R = \frac{1}{u_{\max}^2},$$

where $u_{\max}$ denotes the maximum allowable steering angle. The state weighting matrix $Q$ is selected as a diagonal matrix, where each diagonal element penalizes the corresponding augmented state. In particular, a higher weight is assigned to the integral state to enforce accurate steady-state tracking:

$$Q = \left(n \cdot \operatorname{diag}\left(\epsilon_1^2, \epsilon_2^2, \epsilon_3^2, \epsilon_4^2, \epsilon_5^2\right)\right)^{-1}.$$

The optimal feedback gain is computed by solving the Continuous-time Algebraic Riccati Equation (CARE) using the `icare` algorithm:

$$A_m^\top X + X A_m - X B_{1e} R^{-1} B_{1e}^\top X + Q = 0.$$

The resulting optimal gain matrix is given by

$$K = -R^{-1} B_{1e}^{\top} X,$$

which is partitioned as

$$K = \begin{bmatrix} K_s & K_{IA} \end{bmatrix},$$

where $K_s$ represents the state-feedback gains and $K_{IA}$ corresponds to the integral action gain. This control structure guarantees closed-loop stability, optimal transient performance, and zero steady-state tracking error for the lateral displacement, making it suitable for Lane Keeping Assist System (LKAS) applications.

```
%% LQR state-feedback with integral action

Ae = [Amatrix zeros(n,s);
Cematrix zeros(s,s)];

B1e = [B1matrix;
De1matrix];

alpha = 1; % stability margin
umax = 2.12; % maximum steering angle

Ceps = eye(size(Ae));

R = 1/umax^2; % input weighting

eps1max = 1;
eps2max = 1;
eps3max = 1;
eps4max = 1;
eps5max = 0.01; % integral state weighting

Q = inv(length(Ceps) * diag([
eps1max^2;
eps2max^2;
eps3max^2;
eps4max^2;
eps5max^2
]));

Deps = zeros(length(Ae), p);
barR = Deps.' * Q * Deps + R;

Am = Ae + alpha * eye(size(Ae));
```

```
Bm = B1e;
Qm = Ceps.' * Q * Ceps;
Rm = barR;
Sm = (Deps.' * Q * Ceps).';
Em = eye(size(Ae));
Gm = 0;

[Xm, Km, Lm] = icare(Am, Bm, Qm, Rm, Sm, Em, Gm);

K = -Km;
Ks = K(1:length(Amatrix));
KIA = K(length(Amatrix)+1:end);
```

Listing 2: LQR state-feedback controller with integral action

The effectiveness of the LQR state-feedback controller with integral action is verified by analyzing the eigenvalues of the closed-loop augmented system matrix

$$A_{cl} = A_e + B_{1e} \begin{bmatrix} K_s & K_{IA} \end{bmatrix}.$$

Using MATLAB, the resulting eigenvalues are

$$\lambda(A_{cl}) = 10^2 \times \{-1.1425,\ -0.0481 \pm j\,0.0831,\ -0.1160 \pm j\,0.0514\}.$$

All eigenvalues of the augmented closed-loop system have strictly negative real parts, confirming that the matrix $A_{cl}$ is Hurwitz. The dominant real pole at $-114.25$ is associated with the integral action and ensures rapid elimination of steady-state tracking error. The remaining complex conjugate pairs correspond to the lateral vehicle dynamics and exhibit moderate damping, resulting in smooth transient behavior.
The exponential stability of the augmented closed-loop system directly implies BIBS stability. Consequently, bounded disturbances and constant reference inputs lead to bounded state trajectories and asymptotic convergence of the lateral tracking error to zero. This numerical eigenvalue analysis formally justifies the use of the augmented system $(A_e, B_{1e})$ and validates the LQR-based control architecture adopted in this work.

## 5.2 State Observer Design via Kalman Filter

The stability of the Kalman observer is verified by analyzing the eigenvalues of the observer error dynamics matrix $(A - K_oC)$. Using MATLAB, the resulting eigenvalues are:

$$\lambda(A - K_oC) = \{-25.08,\ -9.93,\ -2.79 \pm j\,6.50\}.$$

All eigenvalues have strictly negative real parts, confirming that the observer dynamics are exponentially stable. The real eigenvalues correspond to fast decaying estimation modes, while the complex conjugate pair represents damped oscillatory behavior associated with the coupled lateral and yaw dynamics of the vehicle.
As a consequence, the state estimation error converges asymptotically to zero, ensuring accurate reconstruction of the vehicle states. Together with the closed-loop stability of the LQR-controlled plant, this result confirms that the separation principle holds, allowing independent design of the state-feedback controller and the Kalman observer.
Since not all states of the LKAS model are directly measurable from the camera, a state observer is designed to reconstruct the full state vector using the available output measurements. A Kalman filter–based observer is adopted, as it provides optimal state estimation in the presence of disturbances and measurement noise.
The observer is designed for the linearized system

$$\dot{x} = Ax + B_1 u + B_2 w, \qquad y = Cx + D_2 w,$$

where the vector $w$ includes disturbances and sensor noise.

### Disturbance and Noise Modeling

The uncertainty affecting the system is modeled through a covariance matrix $Q_d$, which captures the effect of disturbances and sensor noise. In particular, variations in the front and rear cornering stiffness are modeled as:

$$\sigma_{C_f} = 0.1\, C_f, \qquad \sigma_{C_r} = 0.1\, C_r,$$

leading to the disturbance covariance

$$Q_{d11} = \begin{bmatrix} \sigma_{C_f}^2 & 0 \\ 0 & \sigma_{C_r}^2 \end{bmatrix}.$$

The camera measurement noise is modeled as zero-mean white noise with variance

$$\sigma_\nu^2,$$

resulting in the measurement noise covariance $Q_{d22} = \sigma_\nu^2$. Cross-correlation terms between disturbances and noise are neglected, yielding the complete covariance matrix:

$$Q_d = \begin{bmatrix} Q_{d11} & 0 & 0 \\ 0 & Q_{d22} & 0 \\ 0 & 0 & 0 \end{bmatrix}.$$

The measurement noise covariance matrix is defined as

$$R_d = \epsilon I,$$

where $\epsilon$ is a small positive scalar reflecting sensor accuracy.

### Dual LQR Formulation for Observer Gain

The Kalman observer gain is computed using the duality between optimal control and optimal estimation. To improve numerical conditioning, a stability margin $\alpha_d$ is introduced by shifting the transposed system matrix:

$$A_m = A^\top + \alpha_d I, \qquad B_m = C^\top.$$

The equivalent cost matrices for the estimation problem are defined as:

$$Q_m = B_2 Q_d B_2^\top, \qquad R_m = D_2 Q_d D_2^\top + R_d, \qquad S_m = (D_2 Q_d B_2^\top)^\top.$$

The observer Riccati equation is solved using the `icare` algorithm, yielding the optimal estimation gain:

$$K_o = K_m^\top.$$

### Observer Dynamics

The resulting observer reconstructs the state vector according to:

$$\dot{\hat{x}} = A\hat{x} + B_1 u + K_o(y - \hat{y}), \qquad \hat{y} = C\hat{x}.$$

This Kalman filter–based observer provides optimal state estimation by balancing model confidence and measurement reliability. It enables accurate reconstruction of lateral velocity, yaw rate, and heading angle using only camera-based lateral displacement measurements, making it well suited for LKAS applications.
The Kalman filter–based observer is implemented in MATLAB using a dual Riccati formulation. The complete implementation, including disturbance and noise modeling, is reported in Listing 3.

```
%% Observer via Kalman Filter

alphad = 1; % observer stability margin

% Disturbance covariance (cornering stiffness uncertainty)
sigma_C_f = 0.1 * C_fs;
sigma_C_r = 0.1 * C_fs;

Qd11 = diag([sigma_C_f^2, sigma_C_r^2]);

% Measurement noise covariance (camera)
sigma_nu = 1e-3;
Qd22 = sigma_nu^2;

```

```
% No cross-correlation assumed
Qd12 = zeros(2,1);

Qd = [ Qd11 Qd12 zeros(2,1);
Qd12.' Qd22 zeros(1);
zeros(1,4) ];

% Measurement noise matrix
Rd = 1e-3 * eye(q);

% Effective measurement noise
barRd = D2matrix * Qd * D2matrix.' + Rd;

% Dual system formulation
Am = Amatrix.' + alphad * eye(size(Amatrix));
Bm = Cmatrix.';

Qm = B2matrix * Qd * B2matrix.';
Rm = barRd;
Sm = (D2matrix * Qd * B2matrix.').';
Em = eye(size(Amatrix));
Gm = 0;

% Riccati equation for Kalman filter
[XmO, KmO, LmO] = icare(Am, Bm, Qm, Rm, Sm, Em, Gm);

% Observer gain
Ko = KmO.';
```

Listing 3: Kalman filter–based state observer implementation

The observer gain $K_o$ balances model confidence and camera measurement reliability, enabling accurate reconstruction of lateral velocity, yaw rate,and heading angle using only lateral displacement measurements.

## 5.3 Control Architecture Overview

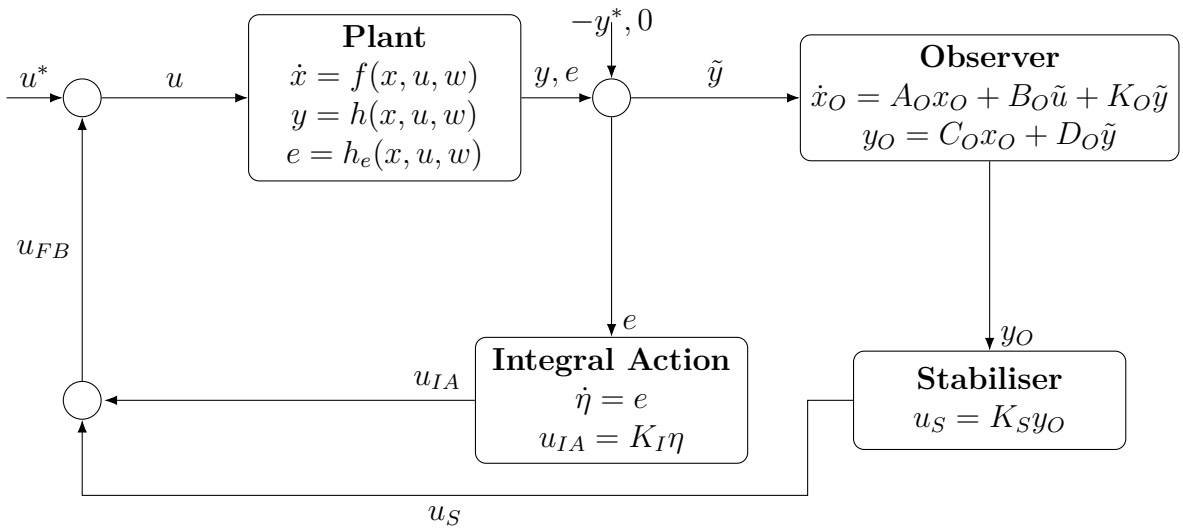


Figure 4: Block diagram of the control architecture

Figure 4 illustrates the control architecture adopted for the LKAS. The lateral displacement tracking error is integrated to provide integral action, ensuring zero steady-state error in the presence of constant disturbances. The state-feedback stabilizer $K_s$ acts on the estimated state provided by the Kalman observer, while the integral gain $K_{IA}$ compensates for steady-state offsets. This architecture guarantees closed-loop stability, BIBS robustness, and accurate lane tracking.

# 6 Feedforward

Although feedforward control is commonly employed in industrial Lane Keeping Assist Systems to introduce a curvature-based steering bias using previewed road geometry, such an approach requires explicit estimation of road curvature, reliable preview information, and an accurate steady-state vehicle model. In the adopted LKAS formulation, the controlled output is the lateral displacement $y_d$, whose evolution is governed by the kinematic relation

$$\dot{y}_d = v_y + v_x \psi. \tag{19}$$

This equation introduces an integrator chain between the steering input $\delta$ and the tracked output $y_d$, since steering affects $y_d$ only indirectly through the lateral velocity and yaw dynamics. Furthermore, the steering input enters the system dynamics exclusively through the lateral tire forces $F_{Fy}$ and $F_{Ry}$, which depend on

the slip angles $\alpha_f$ and $\alpha_r$, and hence on uncertain cornering stiffness parameters and vehicle speed. As a result, any feedforward control action aimed at tracking a reference $y_d \approx r(t)$ would require an explicit inverse mapping through the tire-force dynamics and the use of time derivatives of the camera-based reference signal. Such an inversion would be highly sensitive to modeling uncertainties, speed variations, and measurement noise. For these reasons, feedforward control was deliberately excluded, and the LKAS problem was formulated as a feedback regulation task with integral action, ensuring robust stability and zero steady-state tracking error without relying on fragile model inversion.

# 7 Simulation Results

## 7.1 Plot Analysis

The Lane Keeping Assist System (LKAS) developed in this work is based on a linearized two-degree-of-freedom bicycle model and relies exclusively on camera-based measurements of lateral displacement. A state-feedback control strategy using a Linear Quadratic Regulator (LQR) with integral action was designed to ensure accurate lane tracking and zero steady-state error. Since not all system states are directly measurable, a Kalman filter–based observer was implemented to reconstruct the full state vector from limited sensor information.
Simulation results confirm the effectiveness of the proposed approach. The nonlinear closed-loop system maintains stable and accurate lane tracking under reference path variations. The lateral displacement $y_d$ closely follows the reference with negligible steady-state error, validating the role of integral action. The remaining states—lateral velocity $v_y$, yaw rate $r_\omega$, and heading angle $\psi$—remain bounded and well damped, indicating good closed-loop stability and passenger comfort.
The response to non-equilibrium initial conditions, illustrated in demonstrates that the controller–observer structure rapidly stabilizes the vehicle and ensures convergence to the desired lane position. The observer performance confirms the observability analysis, showing that accurate state estimation can be achieved using only camera-based lateral displacement measurements. Overall, the results demonstrate that the proposed LKAS architecture provides a robust and effective solution for vision-based lateral vehicle control.

### Firts test

For the first attempt, we started with nearly random values for Q and R, without focusing too much on their physical meaning, in order to better understand the system's behavior, also inducing noise in the system. In this iteration, the weighting

matrices were selected as:

$$Q = \begin{bmatrix} 0.2 & 0 & 0 & 0 & 0 \\ 0 & 0.2 & 0 & 0 & 0 \\ 0 & 0 & 0.2 & 0 & 0 \\ 0 & 0 & 0 & 0.2 & 0 \\ 0 & 0 & 0 & 0 & 0.2 \end{bmatrix}, \qquad R = 0.1111.$$

The resulting gains are:

$$K_s = \begin{bmatrix} -0.6583 & -1.4323 & -15.8318 & -3.7125 \end{bmatrix}, \qquad K_{IA} = 4.7559.$$

The closed-loop eigenvalues of the augmented system are reported in Section 5.1 and confirm that the augmented dynamics are Hurwitz, hence the regulator achieves exponential stability and zero steady-state tracking error.

## Inference from Closed-Loop Simulation Results for Test 1

The simulation results confirm the effectiveness of the proposed observer-based LQR controller with integral action. As shown in Fig. 5, all system states—namely the lateral velocity $v_y$, yaw rate $r_\omega$, and heading angle $\psi$—remain bounded and converge rapidly to zero following transient disturbances, indicating closed-loop stability. The lateral displacement $y_d$ accurately tracks the reference signal with negligible steady-state error, validating the role of integral action in rejecting constant disturbances and modeling uncertainties. Despite the presence of significant measurement noise, the closed-loop response remains smooth and well damped, demonstrating the robustness of the Kalman observer and confirming the BIBS stability of the overall system. These results show that the selected LQR weighting matrices and observer design achieve a satisfactory trade-off between tracking performance, disturbance rejection, and noise attenuation.

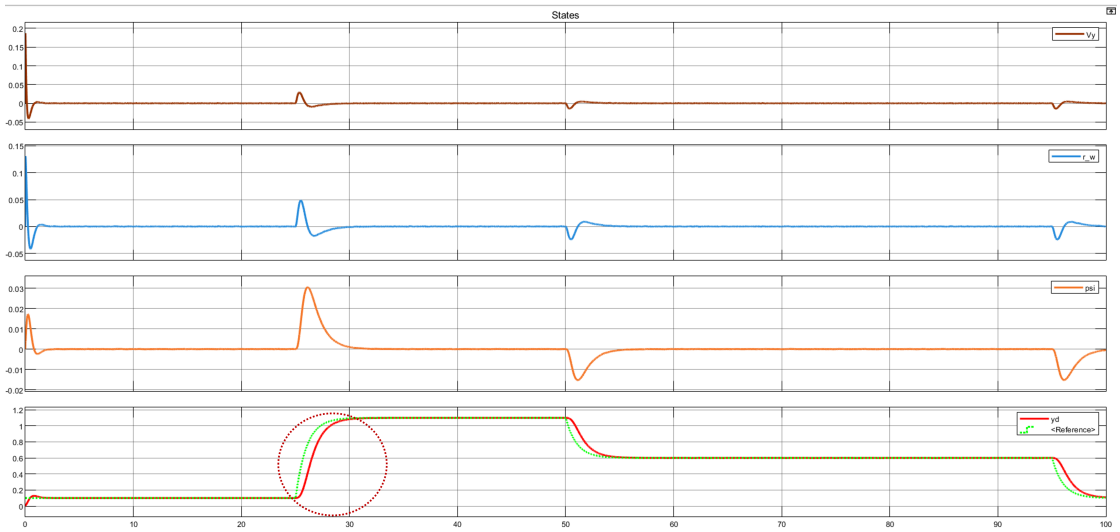


Figure 5: Plot for Test1

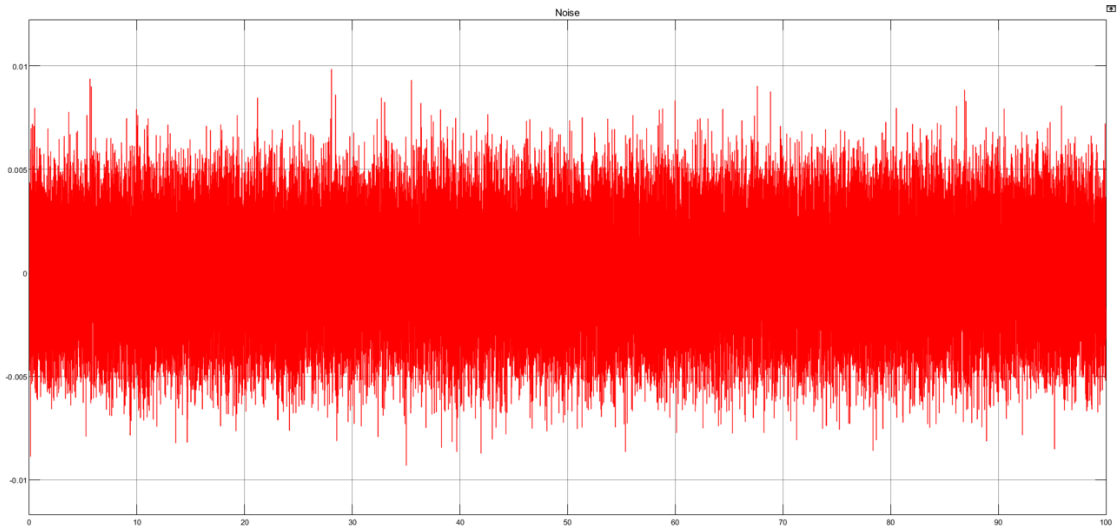


Figure 6: Plot for noise

### Second test

In the second test, the integral action of the controller is further tuned to improve the transient response. As observed in Fig. 5, the first test exhibits a noticeable delay in lateral displacement tracking when the reference path changes. This behavior indicates insufficient aggressiveness in the integral channel, leading to slow error accumulation and delayed correction.

To address this issue, the weighting associated with the integral state is increased by modifying the parameter $\varepsilon_{5,\max}$ in the state weighting matrix $Q$. The updated LQR weighting matrices are given by

$$Q = 10^3 \begin{bmatrix} 0.0002 & 0 & 0 & 0 & 0 \\ 0 & 0.0002 & 0 & 0 & 0 \\ 0 & 0 & 0.0002 & 0 & 0 \\ 0 & 0 & 0 & 0.0002 & 0 \\ 0 & 0 & 0 & 0 & 2.0 \end{bmatrix}, \qquad R = 0.2225.$$

This choice significantly increases the penalty on the integral error, resulting in a larger integral gain,

$$K_{IA} = 111.61,$$

while the updated state-feedback gain is

$$K_S = \begin{bmatrix} -0.9150 & -0.4799 & -22.6554 & -18.1275 \end{bmatrix}.$$

As a result, the controller reacts more promptly to reference changes, reducing the tracking delay while maintaining closed-loop stability. This confirms the critical role of the integral action tuning in improving transient performance without compromising robustness.

## Inference from Closed-Loop Simulation Results for Test 2

In the second test, the integral action was retuned to reduce the tracking delay observed in Fig. 7 during reference changes. This was achieved by increasing the weighting associated with the integral state in the matrix $Q$, which resulted in a significantly larger integral gain $K_{IA}$. As shown in Fig. 7, the lateral displacement $y_d$ follows the reference more rapidly during path transitions, exhibiting a reduced rise time and negligible steady-state error.

The internal states—lateral velocity $v_y$, yaw rate $r_w$, and heading angle $\psi$—remain bounded and well damped, indicating that the increased integral action does not compromise closed-loop stability. While the transient response becomes slightly more aggressive at reference changes, no sustained oscillations are observed. Overall, this tuning improves tracking performance while preserving robustness to measurement noise and disturbances, confirming the effectiveness of the observer-based LQR control architecture.

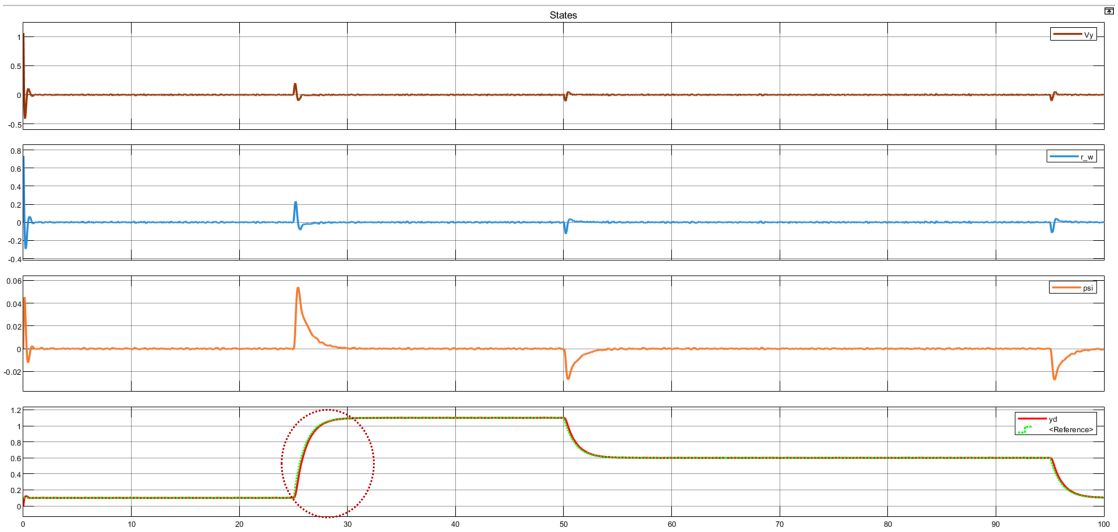


Figure 7: Plot for Test2

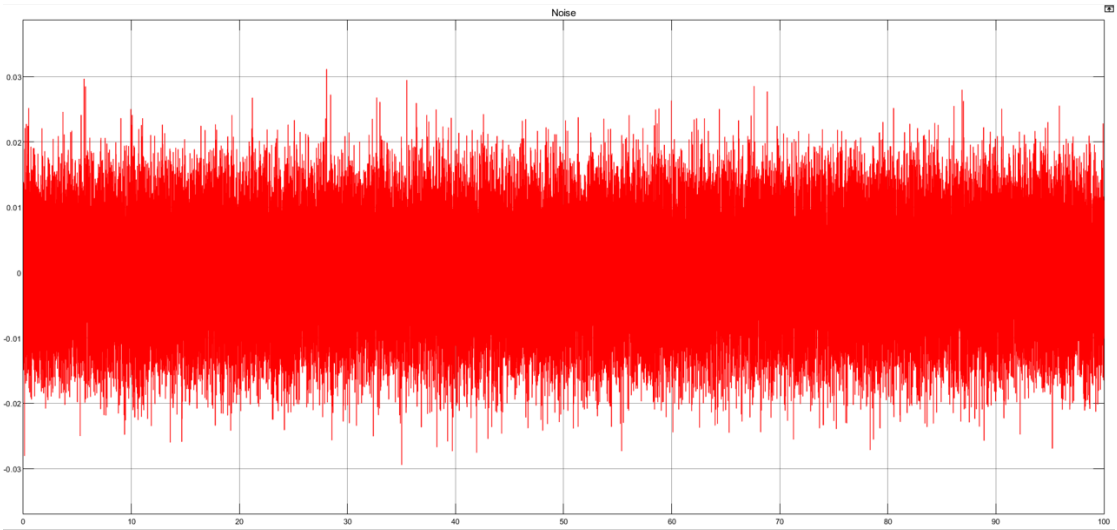


Figure 8: Plot for noise in test2

# 8 Future Improvements

Several extensions can further enhance the proposed LKAS framework. First, a feedforward steering term based on road curvature could be introduced to reduce transient tracking errors during lane curvature changes, improving anticipation capability. Second, the vehicle model could be extended to include roll dynamics,

variable longitudinal speed, and steering actuator dynamics, increasing model fidelity under aggressive maneuvers.Finally, experimental validation using real vehicle data orhardware-in-the-loop (HIL) testing would be a crucial next step to assess robustness and performance under real-world driving conditions.

# References

# References

[1] E. Ahmad, J. Iqbal, M. A. Khan, W. Liang, and I. Youn, "Predictive Control Using Active Aerodynamic Surfaces to Improve Ride Quality of a Vehicle," *Electronics*, vol. 9, no. 9, p. 1463, 2020. https://doi.org/10.3390/electronics9091463

[2] N. Mimmo, *Analysis and Design of Control Laws for Advanced Driver-Assistance Systems: Theory and Applications*. Cham, Switzerland: Springer, 2024. https://doi.org/10.1007/978-3-031-22520-8

[3] R. Rajamani, *Vehicle Dynamics and Control*, 2nd ed., New York, NY, USA: Springer, 2012. https://doi.org/10.1007/978-1-4614-1433-9