
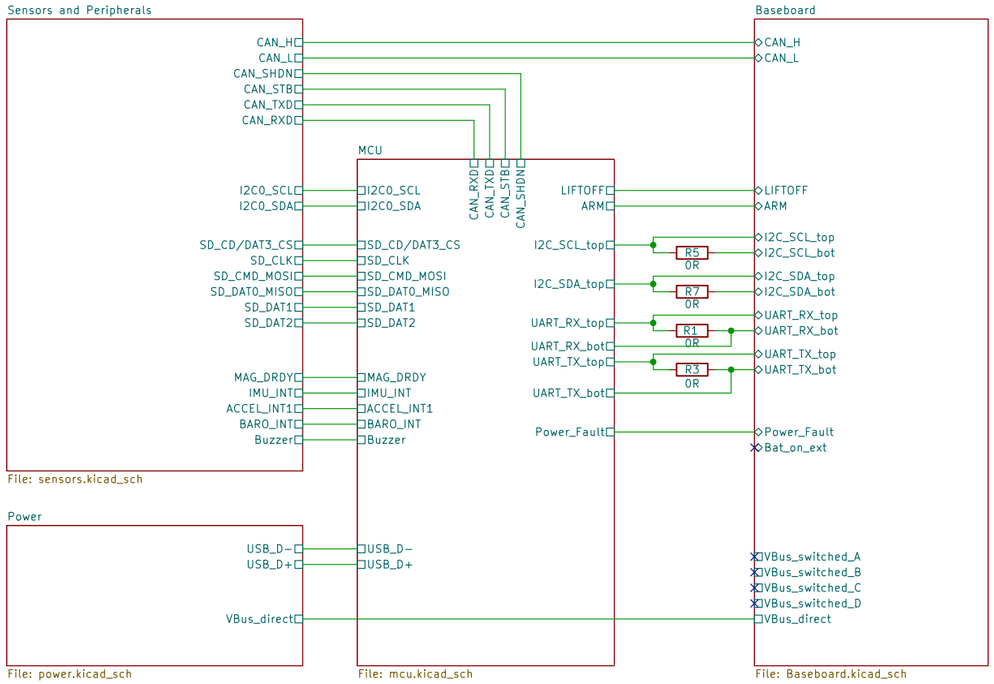



Sheet: /		
File: AUXSPACE_core_pcb.kicad_sch		
Title:		
Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 1/5

STACK – DATA


top
J1
SAMTEC_TFM-110-02-S-D-A (PIN)



Output: ARM Signal goes HIGH when vehicle is in armed state
Output: Lift Off goes High wenn vehicle experienced Lift Off
Output: Power Fault goes low when Vbus reaches a critical threshhold
Input: Bat enable when high





bot
J2
SAMTEC_SFM-110-02-L-D-A-P-TR (SOCKET)




STACK – POWER

top
J3
SAMTEC_TFM-110-02-S-D-A (PIN)
3,7A / Pin maximal






bot
J4
SAMTEC_SFM-110-02-L-D-A-P-TR (SOCKET)



Logos & Pads

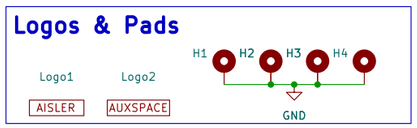


Sheet: /Baseboard/
File: Baseboard.kicad_sch

Title:


Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 2/5

Microcontroller

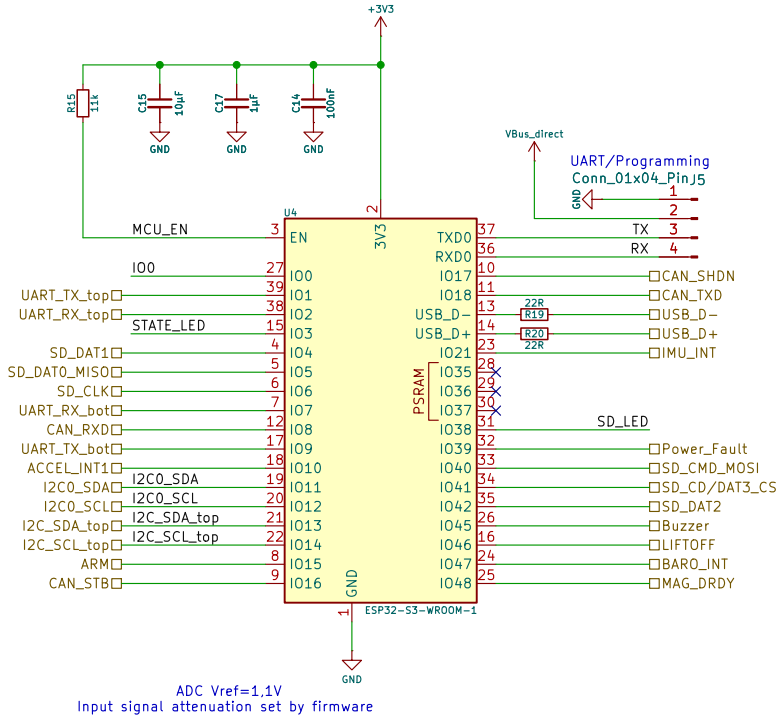


ADC Vref=1,1V
Input signal attenuation set by firmware


RESET




BOOTSEL



Status LEDs




Pull-Ups



Sheet: /MCU/		
File: mcu.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 3/5

BARO Infineon DPS310 or DPS368


0x77

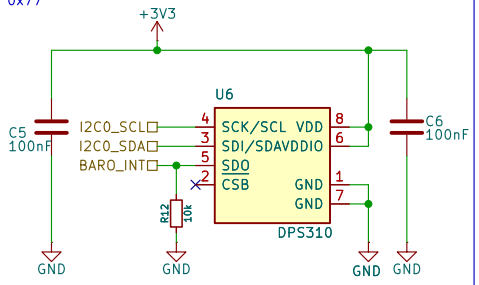

IMU STM LSM6DS032x

0x6A


max ODR 6664Hz

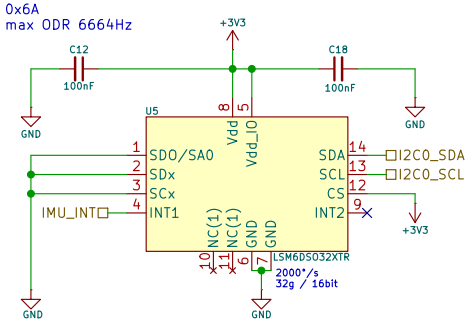

HighG Accel STM LSM6DSV320XTR


0x6B

max ODR 480 Hz

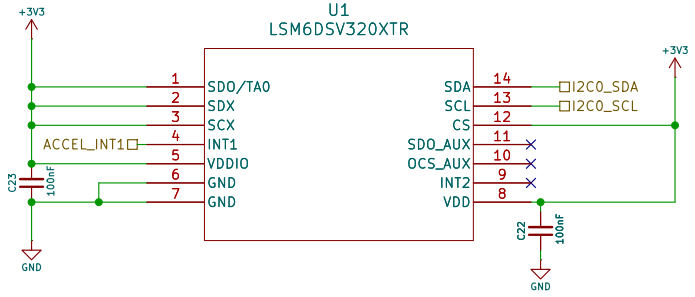


MAGNETOMETER STM LIS3MDL

0x1C

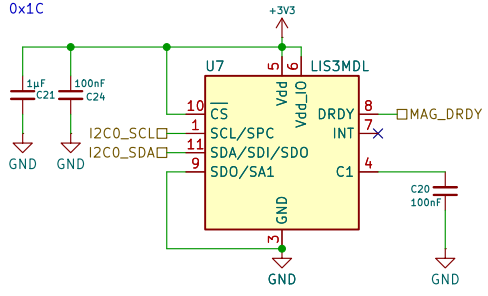


SD-Card


when using the SDIO protocol
use ESP internal PullUp resitors
@ each pin accept CLK

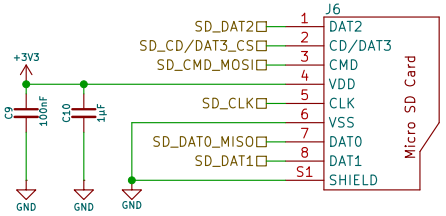

CAN

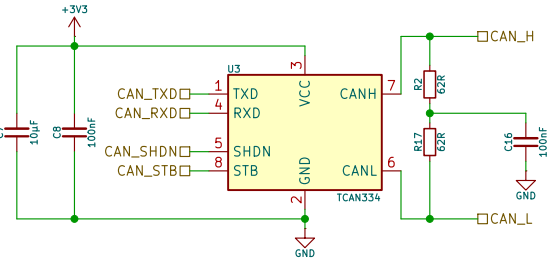

BUZZER




Sheet: /Sensors and Peripherals/
File: sensors.kicad_sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 4/5


USB Type-C

USB 2.0 compat

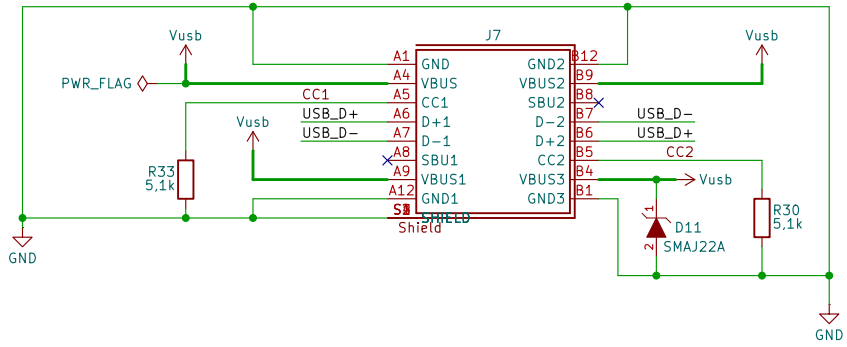


Protection

for USB CC Pins




TSV Diode

USB D+/D-



POWER


3V3 Power Source

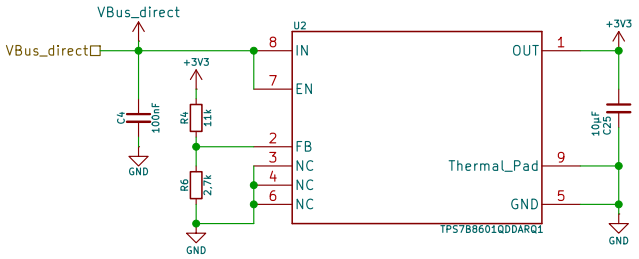

USB PD

Nanjing Qinheng CH224A

9V

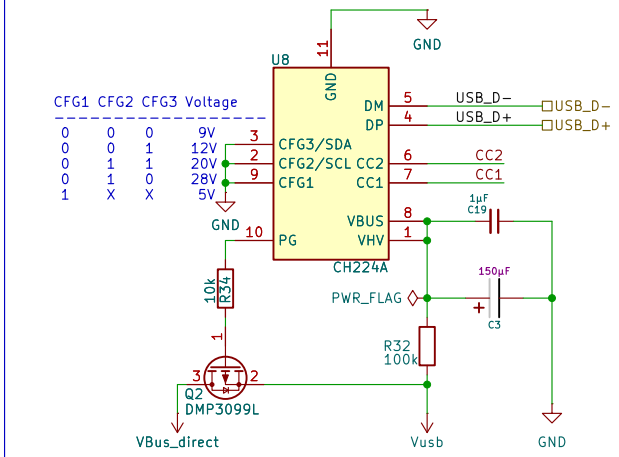

Sheet: /Power/
File: power.kicad_sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 5/5