
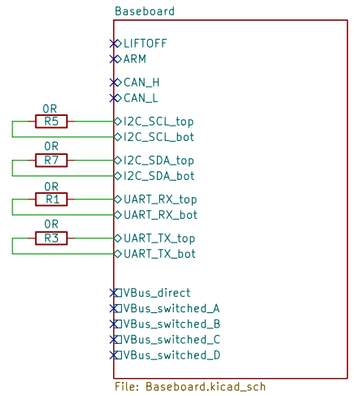


Sheet: /
File: AUXSPACE_core_pcb.kicad_sch

Title:


Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 1/2

BUZZER




POWER


3,3V Spannungsversorgung

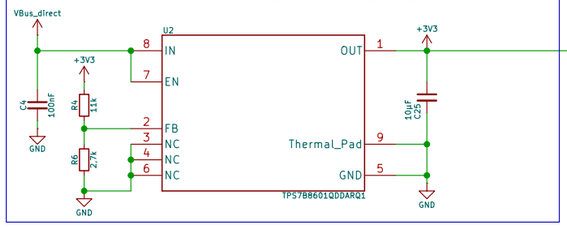


Status LEDs



BOOTSEL




Pull-Ups




STACK – DATA


top
J1
SAMTEC_TFM-110-02-S-D-A (PIN)



Output: ARM Signal goes HIGH when vehicle is in armed state
Output: Lift Off goes High wenn vehicle experienced Lift Off
Output: Power Fault goes low when Vbus reaches a critical threshhold
Input: Bat enable when high


bot
J2
SAMTEC_SFM-110-02-L-D-A-P-TR (SOCKET)






SD-Card

when using the SDIO protocol
use ESP internal PullUp resitors
@ each pin accept CLK

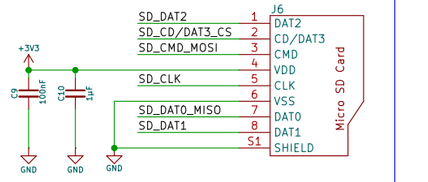


CAN

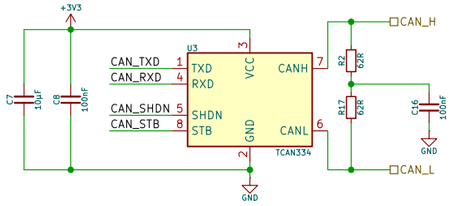


MAGNETOMETER STM LIS3MDL

0x1C

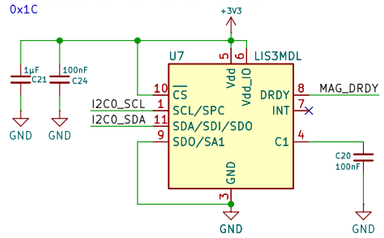


BARO Infineon DPS310 or DPS368

0x77

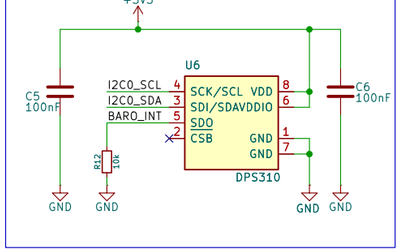


IMU STM LSM6DS032x

0x6A
max ODR 6664Hz

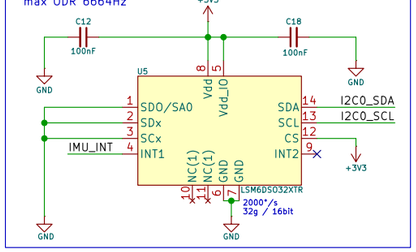


HighG Accel STM LSM6DSV320XTR

0x6B
max ODR 480 Hz

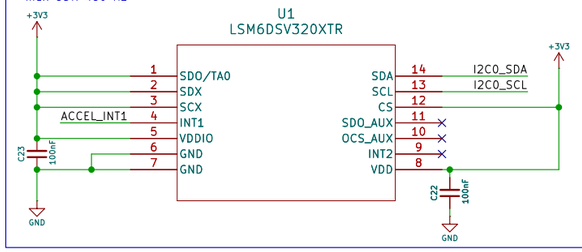



STACK – POWER

top
J3
3,7A / Pin maximal
SAMTEC_TFM-110-02-S-D-A (PIN)




bot
J4
SAMTEC_SFM-110-02-L-D-A-P-TR (SOCKET)






Microcontroller

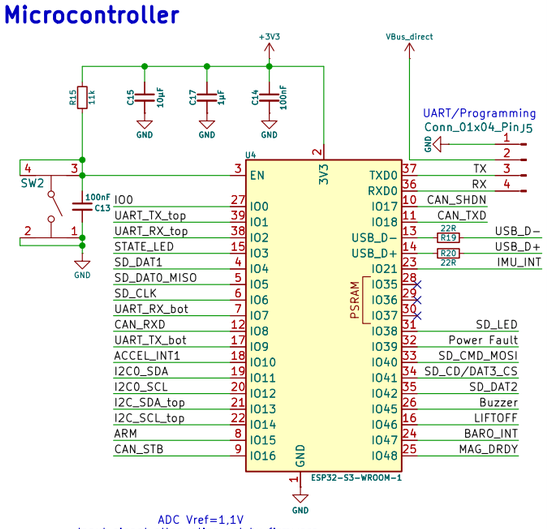

ADC Vref=1,1V
Input signal attenuation set by firmware


TSV Diode

USB D+/D-




Protection

for USB CC Pins




USB PD Nanjing Qinheng CH224A

9V

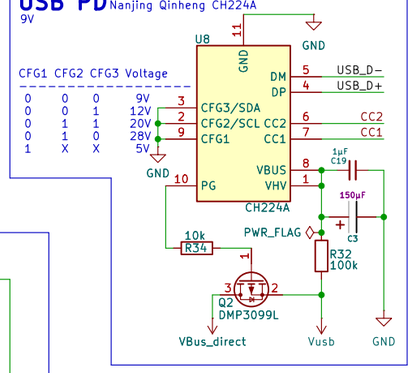


USB Type-C

USB 2.0 compat

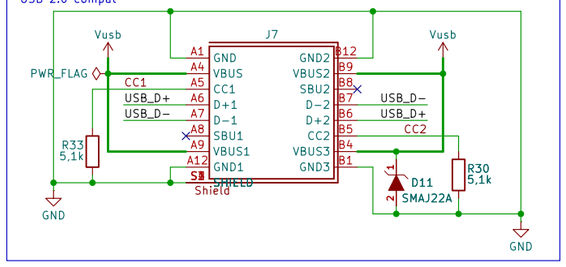

Logos & Pads

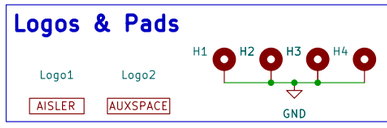

Sheet: /Baseboard/		
File: Baseboard.kicad_sch		
Title:		
Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 2/2