
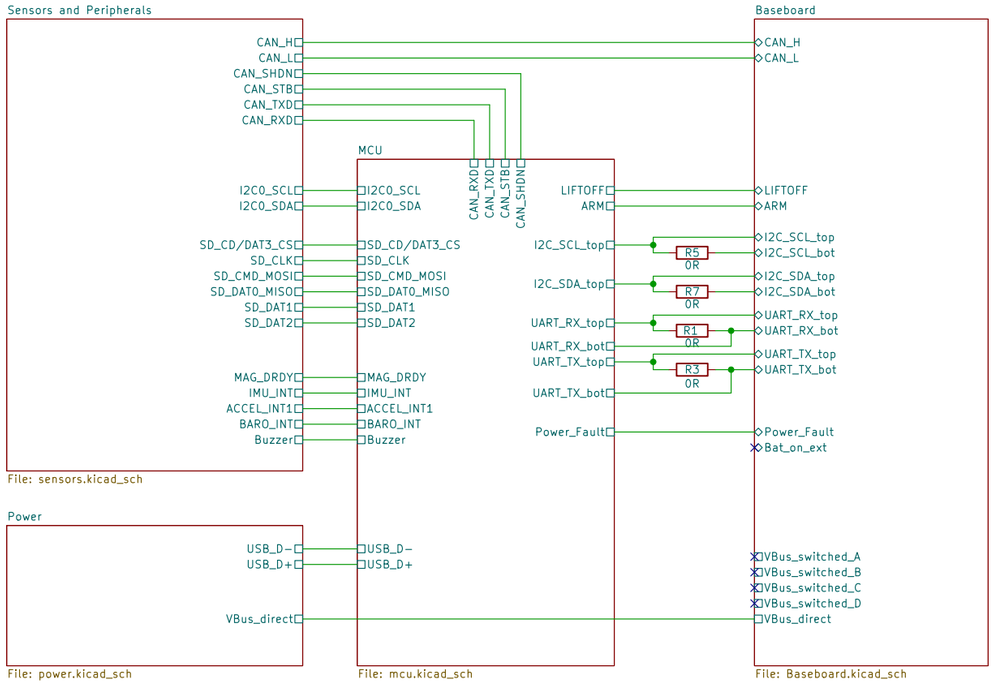



Sheet: / File: AUXSPACE_core_pcb.kicad_sch		
Title:		
Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 1/5

STACK – DATA


top
J1
SAMTEC_TFM-110-02-S-D-A (PIN)



Output: ARM Signal goes HIGH when vehicle is in armed state
Output: Lift Off goes High wenn vehicle experienced Lift Off
Output: Power Fault goes low when Vbus reaches a critical threshhold
Input: Bat enable when high





bot
J2
SAMTEC_SFM-110-02-L-D-A-P-TR (SOCKET)




STACK – POWER

top
J3
SAMTEC_TFM-110-02-S-D-A (PIN)
3,7A / Pin maximal






bot
J4
SAMTEC_SFM-110-02-L-D-A-P-TR (SOCKET)



Logos & Pads

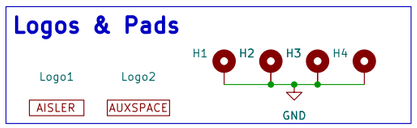


Sheet: /Baseboard/
File: Baseboard.kicad_sch


Title:

Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 2/5


Microcontroller

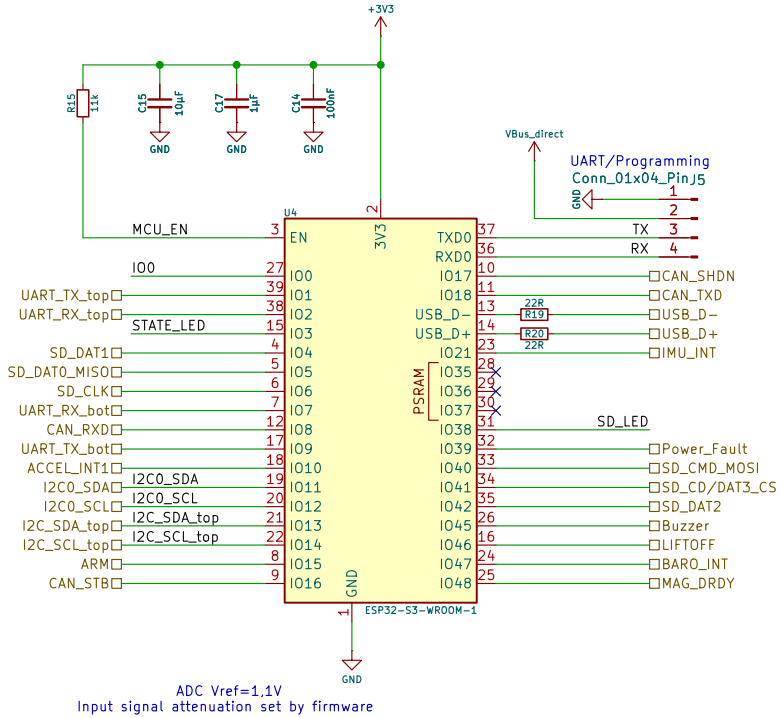


RESET




BOOTSEL




Status LEDs





Pull-Ups





Sheet: /MCU/		
File: mcu.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 3/5

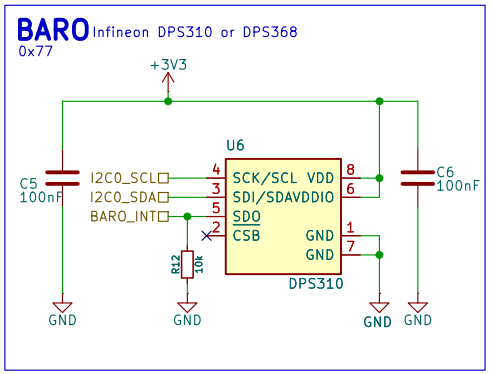


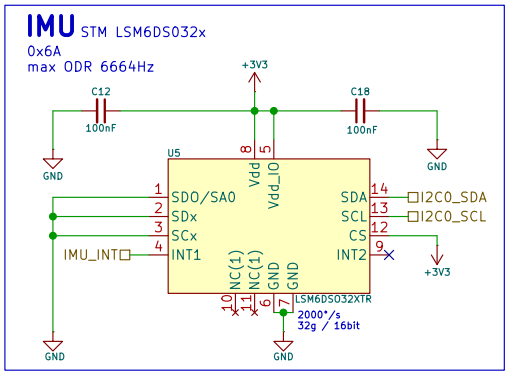


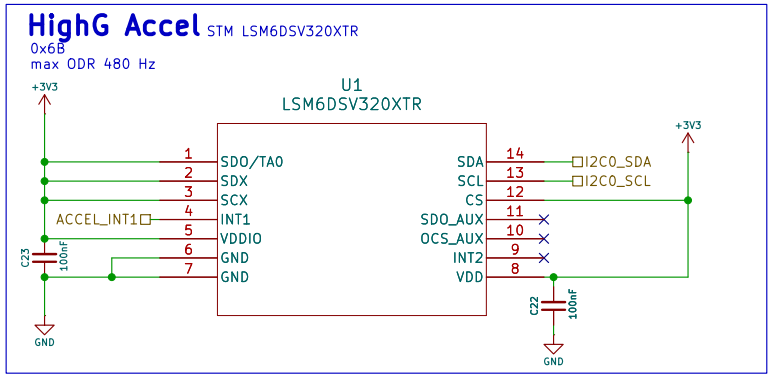

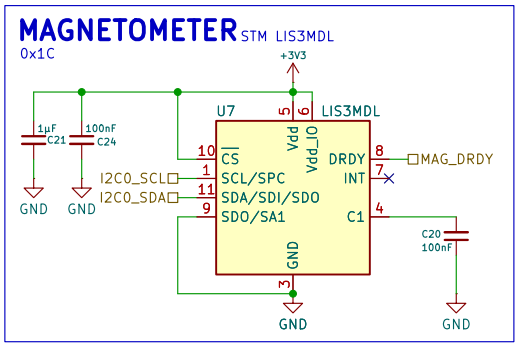

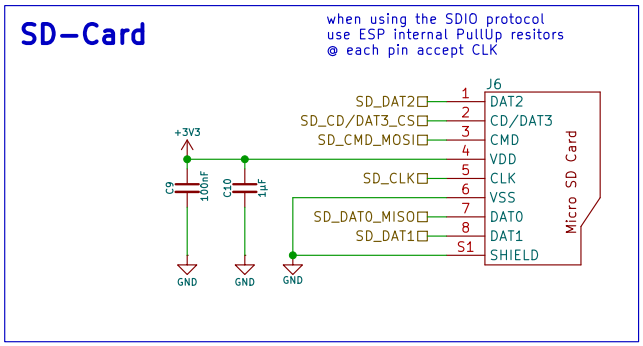

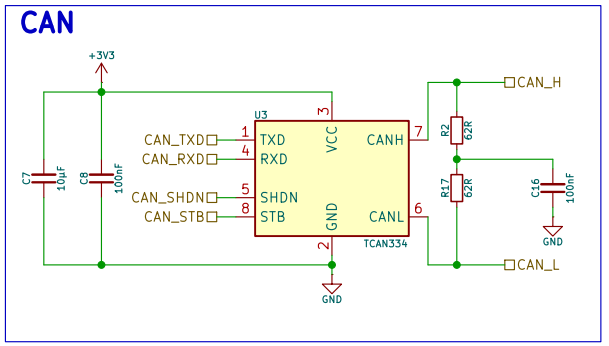




Sheet: /Sensors and Peripherals/		
File: sensors.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 4/5


USB Type-C

USB 2.0 compat

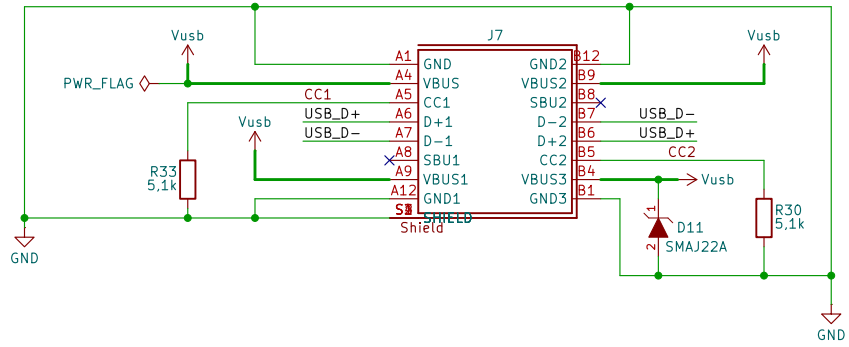


Protection

for USB CC Pins




TSV Diode

USB D+/D-



POWER


3V3 Power Source

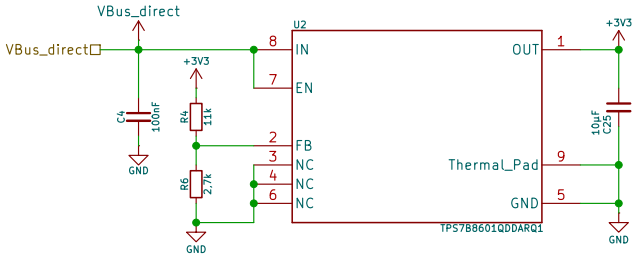

USB PD

Nanjing Qinheng CH224A

9V

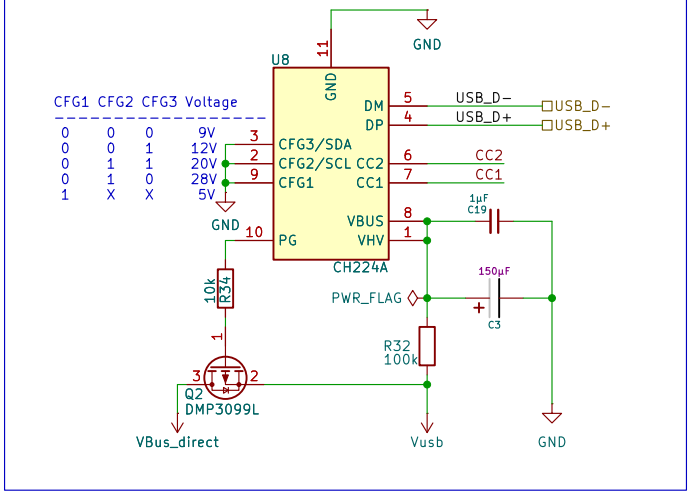

Sheet: /Power/		
File: usb_pd.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 5/5