



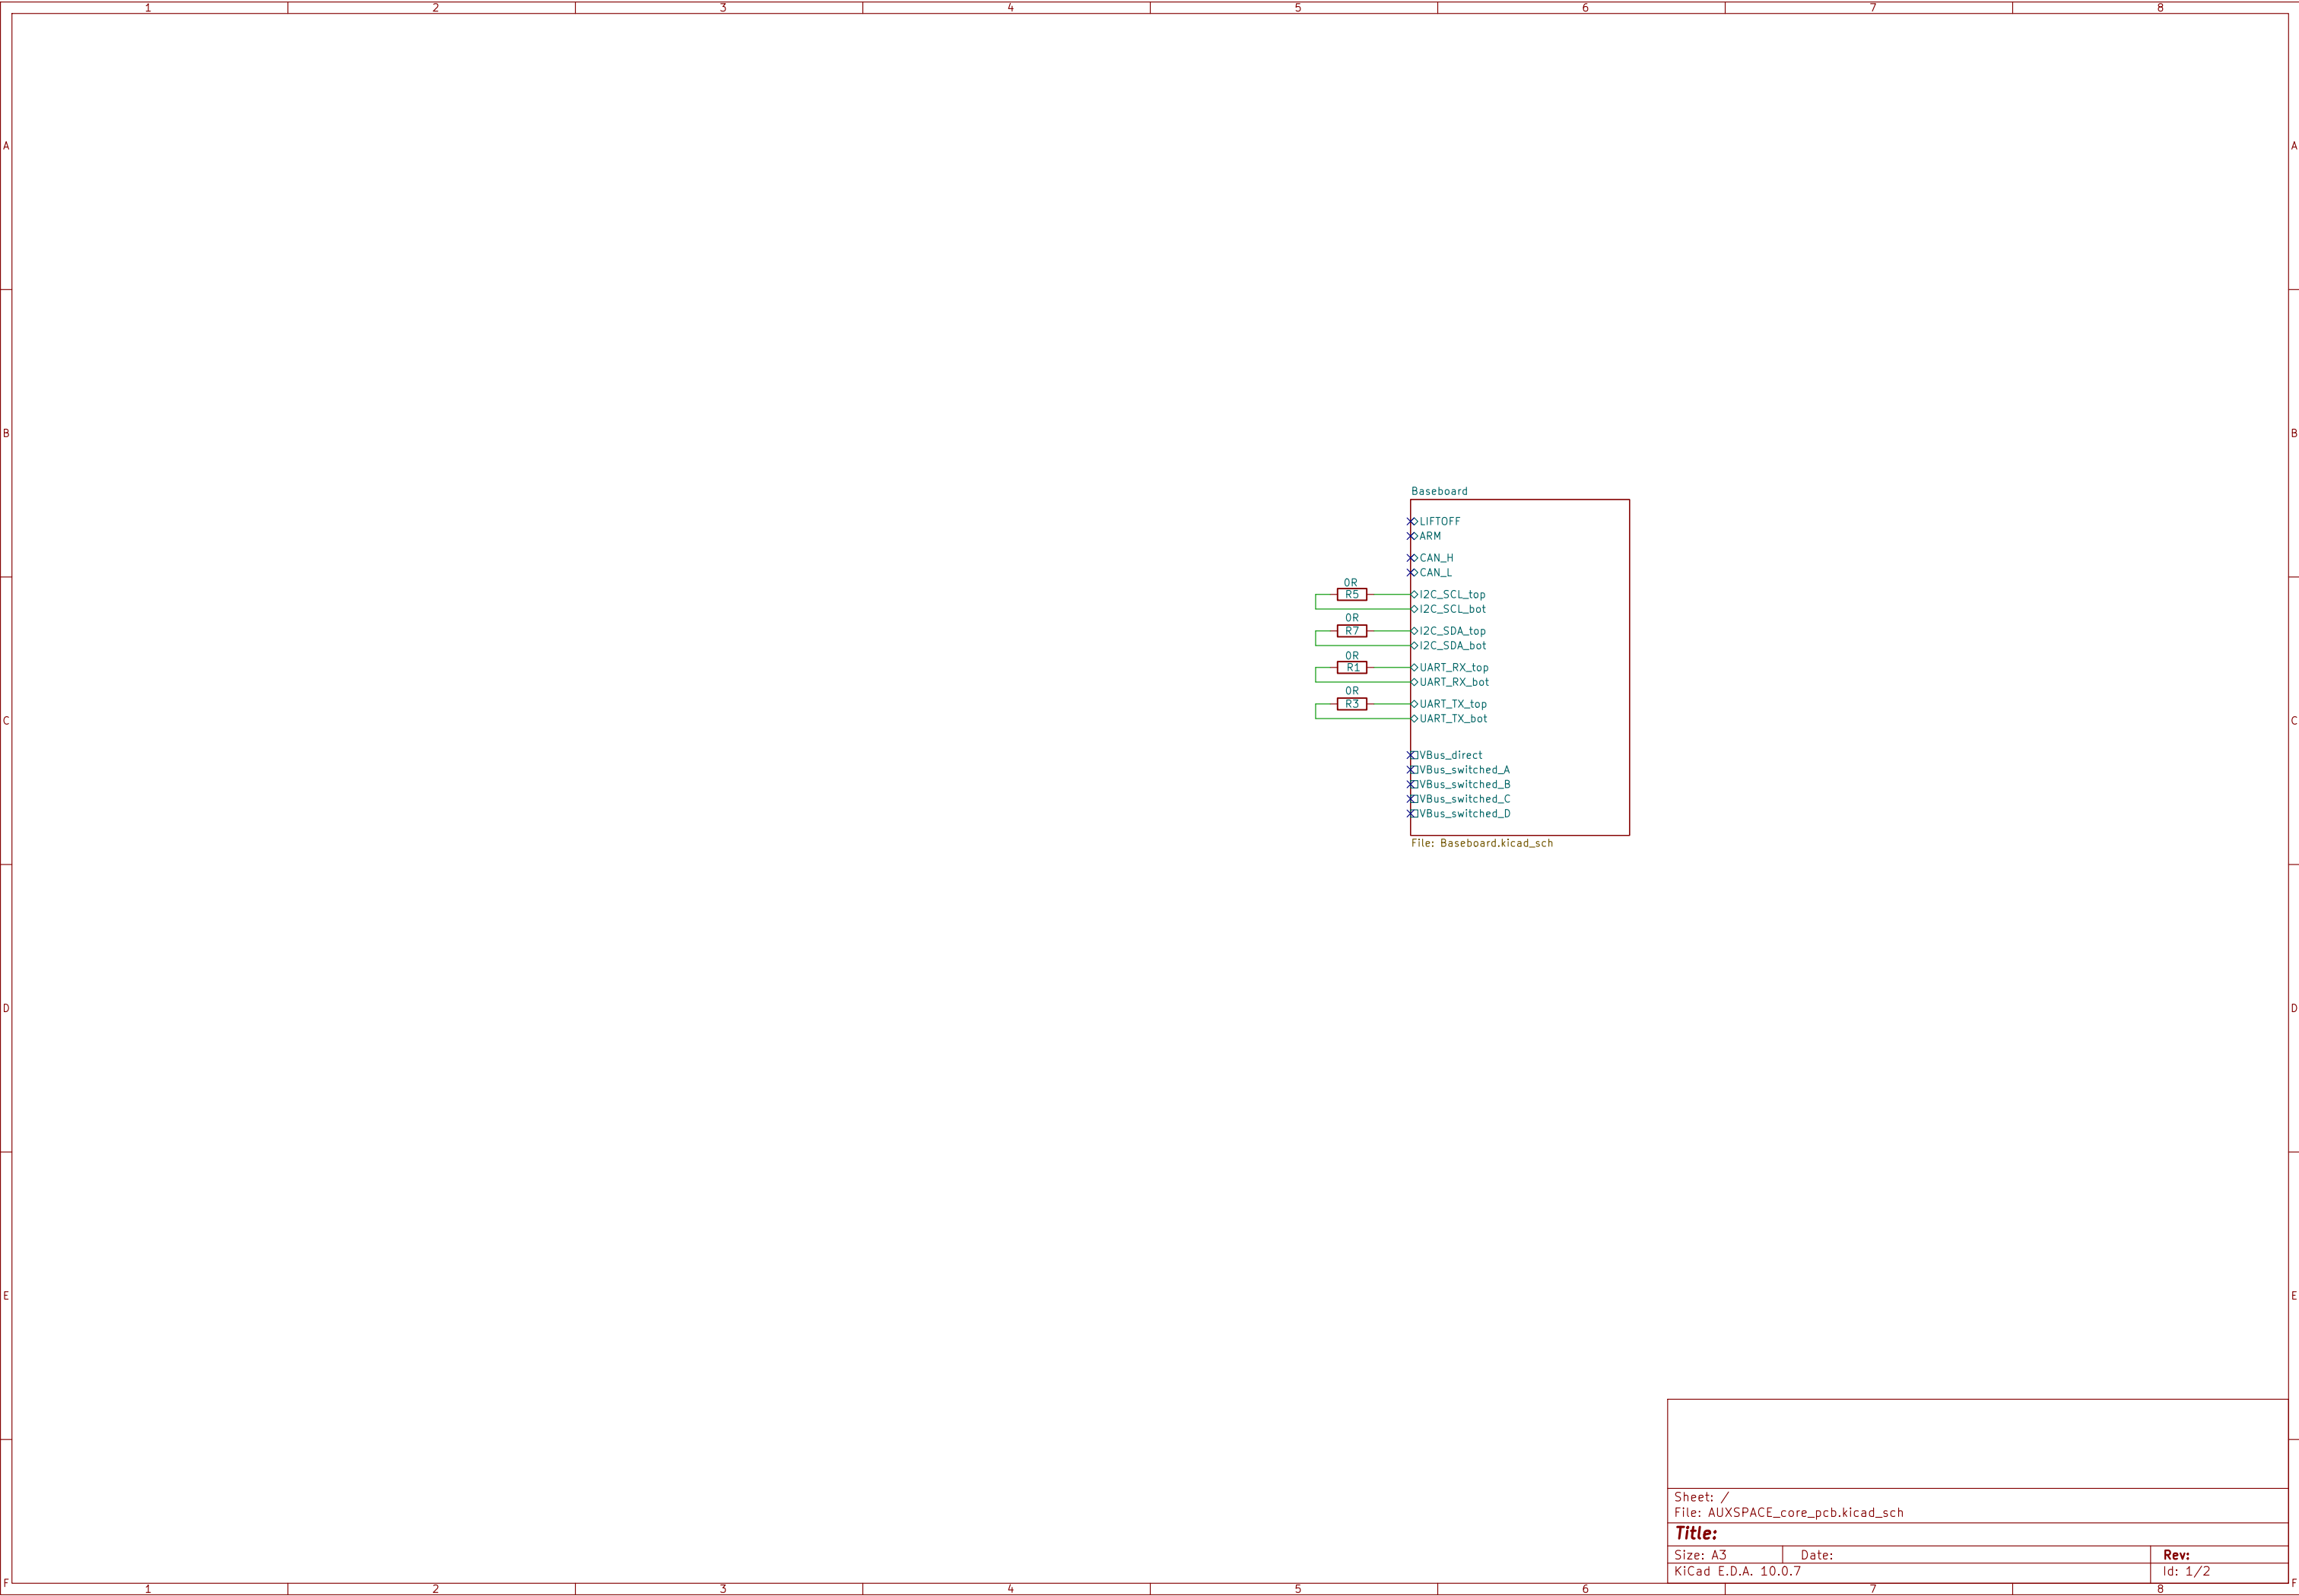


BUZZER




POWER


3,3V Spannungsversorgung

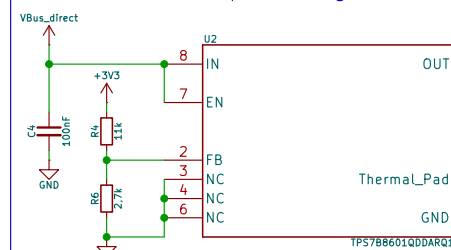


Status LEDs




BOOTSEL



Pull-Ups




STACK – DATA

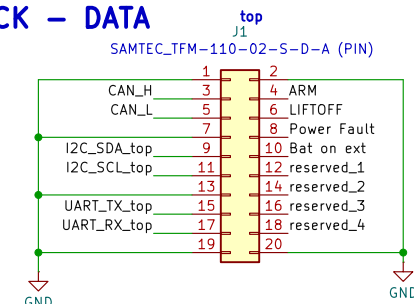


Output: ARM Signal goes HIGH when vehicle is in armed state
Output: Lift Off goes High wenn vehicle experienced Lift Off
Output: Power Fault goes low when Vbus reaches a critical threshold
Input: Bat enable when high

SD-Card


when using the SDIO protocol
use ESP internal PullUp resistors
⊗ each pin accept CLK

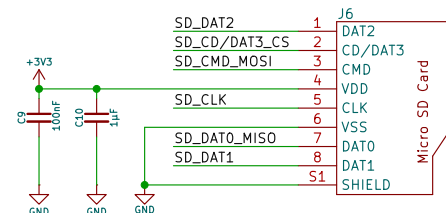


CAN

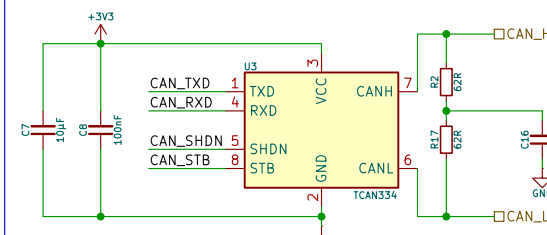


MAGNETOMETER

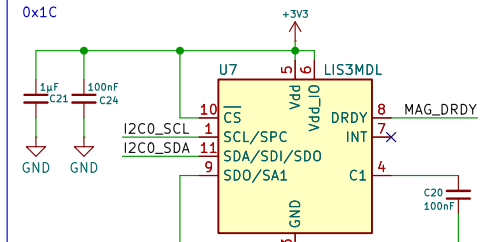


BARO

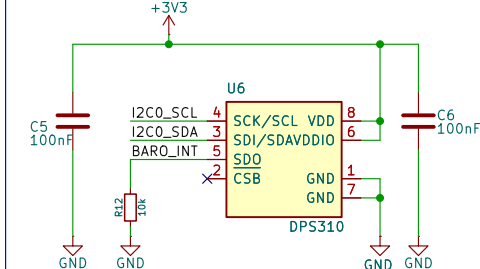


IMU

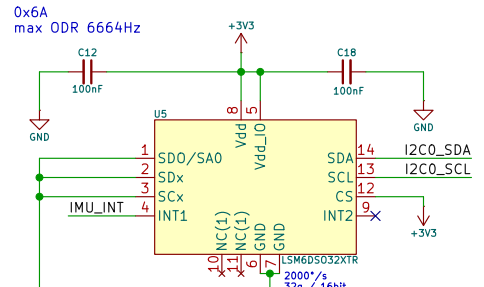


HighG Accel

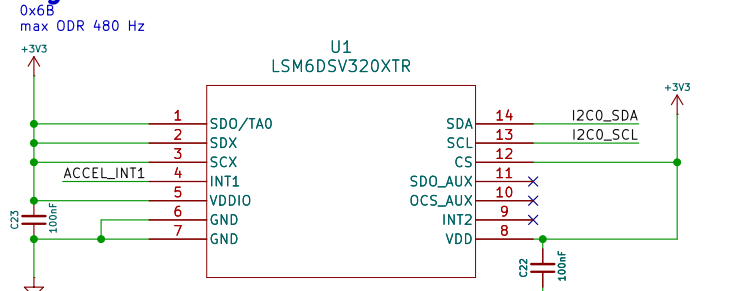


Microcontroller

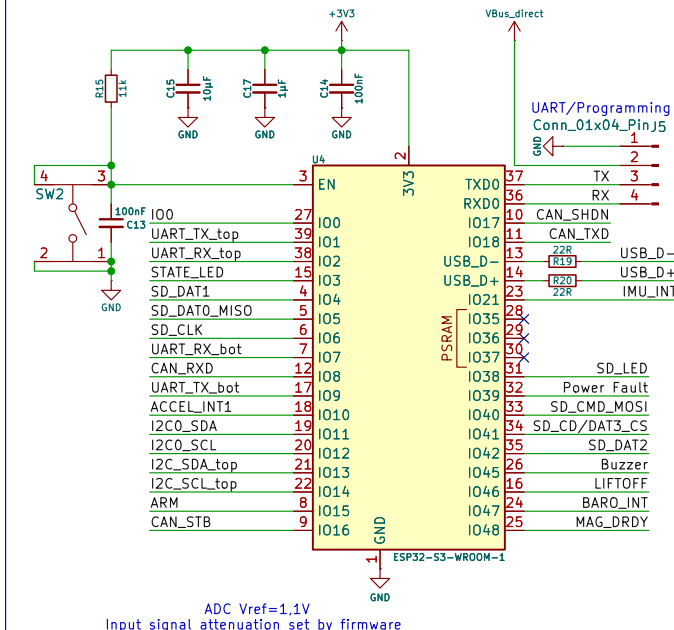


TSV Diode




Protection




USB PD

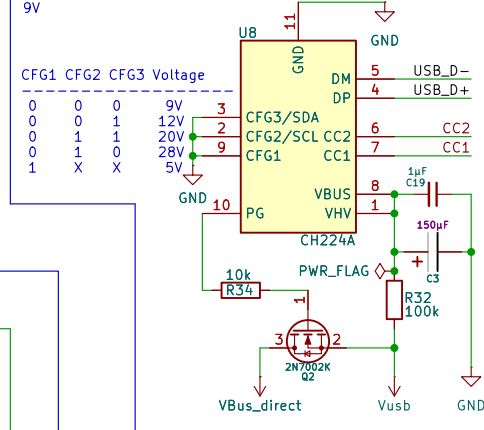

Logos & Pads



STACK – POWER

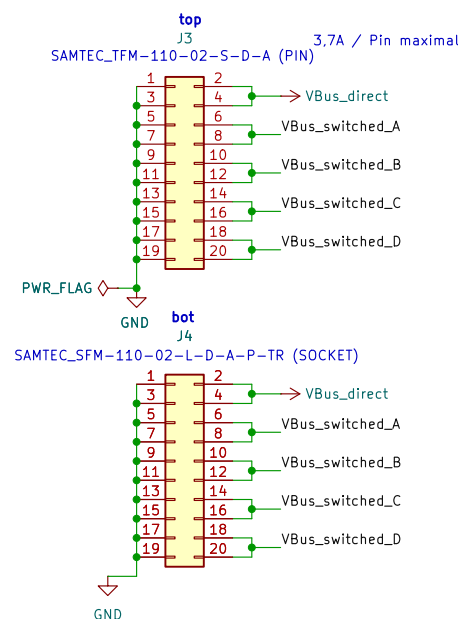

PWR_FLAG
VBus_direct
VBus_switched_A
VBus_switched_B
VBus_switched_C
VBus_switched_D

Sheet: /Baseboard/
File: Baseboard.kicad_sch

Title:

Size: A3

Date:

Rev:

KiCad E.D.A. 10.0.7

Id: 2/2