1.充电/电源


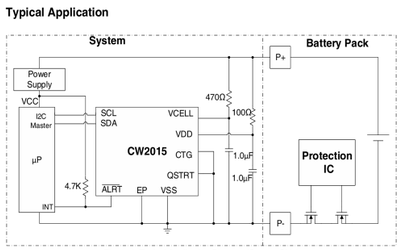


Figure 1. Typical Application Diagram (System Side)

TYPICAL APPLICATION

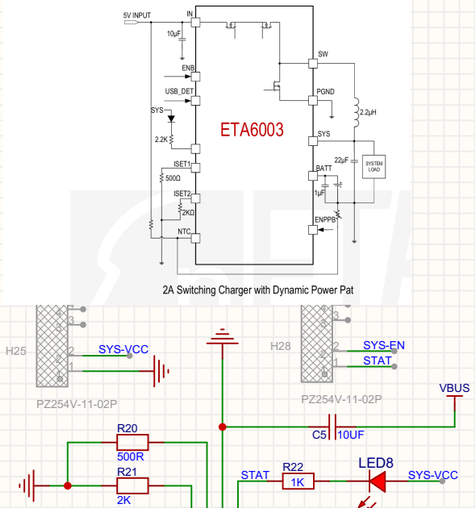

公式（官方给的）

充电电流 I = 1000 ÷ 电阻值（Ω）

你用 USB 5V 充电，最常用 2 档：

- **500mA** → 电阻 = **2kΩ**
- **1A** → 电阻 = **1kΩ**

PIN DESCRIPTION

PIN #	NAME	DESCRIPTION
1,15	SYS	System Voltage Pin. It is also the Switching regulator's output pin. Connect an inductor and capacitor to form the output filter.
2	IN	Input pin. Can be connected to an AC adaptor or a USB charger output. Bypass with a 10μF capacitor each to GND and PGND
3,4	SW	Switching node of the Switching Regulator. Connect a 1μH to 2.2μH inductor from this pin to SYS
5	PGND	Power Ground. Bypass with a 10μF capacitor to IN with a shortest possible trace.
6	ENB	Active Low Enable pin. Tie this pin low to enable the Charging, tie high to disable Charging, while still keeping powerpath from BATT to SYS
7	NTC	Thermistor input
8	ENPPB	Shipping mode enable Pin. Tie to GND to enable power path from BATT to SYS, tie to BATT, to disable this path thereby enabling shipping mode to save power to extend battery life.
9	STATS	Status pin for Charging status indications. An open drain device capable of driving 10mA current.
10	GND	Analog Ground Pin. Bypass with a 10μF capacitor to IN
11	ISET1	AC Fast Charge Current set pin for AC input. Connecting a Resistor between ISET1 to GND This sets the fast charge current value for AC adapter when USB_DET is low.
12	ISET2	USB Charge Current set pin for USB input. Connecting a Resistor between ISET2 to GND This sets the charge current value for USB input when USB_DET is high.
13	USB_DET	Charge current selecting input. Pull this pin low if an AC adapter is connected and select fast charging current to be set by ISET1. And set this pin high if a USB input is connected and select USB charging current to be set by ISET2. It is default low.
14,16	BATT	Battery pin. Connect a Battery to this pin

电源管理

Typical Application Circuit






Figure 1. Typical Application Circuit




电源管理

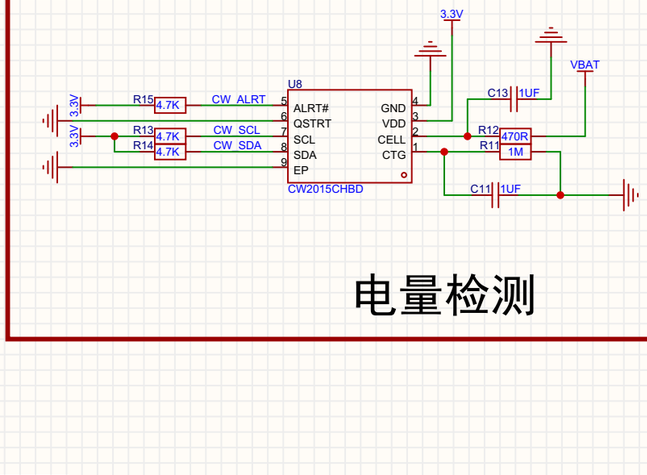

电量检测



引脚匹配

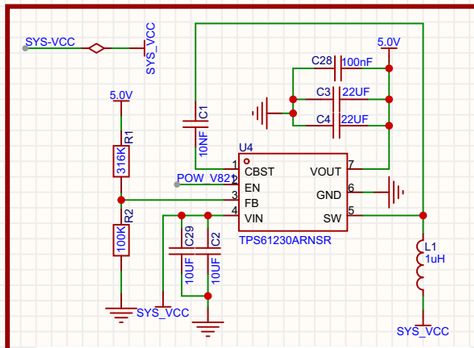


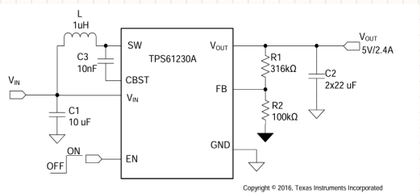


图 15. TPS61230A 5-V Output Typical Application

SYS-->5V升压/2.4A

原理图	Schematic4	创建日期	2026-09-21
		更新日期	2026-10-10
板子	左镜腿主板下层V1.1	图页	charge
绘制			
审阅		光波导AR眼镜_Btail	
		版本	尺寸	页 1 共 5
嘉立创EDA		V1.0	A4	嘉立创EDA


1.连接器

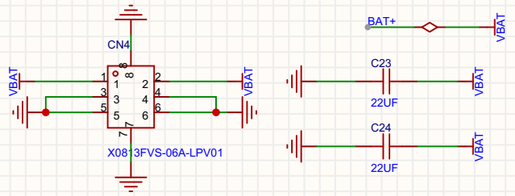


Specifications:
规格：
Voltage rating:30V AC/DC
额定电压：30V AC/DC
Current rating:3A AC/DC
额定电流：3A AC/DC
Withstanding voltage:150V AC/minute
耐受电压：150V AC/分钟
Temperature range:-35℃-+85℃
温度范围：-35℃-+85℃
Insulation resistance：1000MΩ min
绝缘电阻：1000MΩ Min
Contact resistance:100mΩ Max
接触电阻：100mΩ Max

FPC接口


-NOTES-
1. MATERIAL SEE TABLE;
2. ELECTRICAL PERFORMANCES:
   2-1. RATED CURRENT: 0.3A;
   2-2. CONTACT RESISTANCE: 90mΩ Max. with AC 20mV, 1kHz and 1mA.;
   2-3. INSULATION RESISTANCE: 50mΩ min. With DC 100v.;
   2-4. WITHSTANDING VOLTAGE: 100 VAC FOR 1 MINUTE MIN.
3. MECHANICAL PERFORMANCES:
   3-1. DURABILITY: 30 CYCLES;
   3-2. OPERATION TEMPERATURE: -40℃ To +85℃:
   3-3. NORMAL INSERT FORCE AT MATED POSITION: 5N MAX:

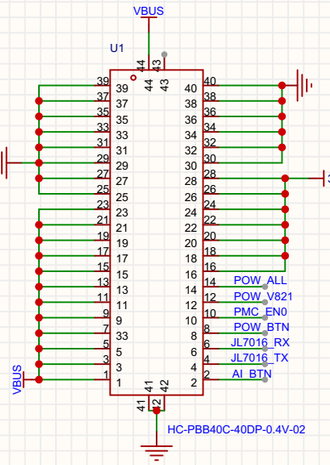

上板接口左

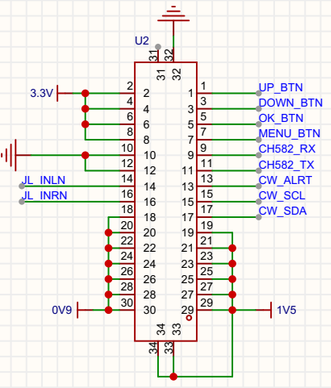


上板接口右



右镜腿FPC接口

原理图	Schematic4	创建日期	2026-05-28
		更新日期	2026-10-10
板子	左镜腿主板下层V1.1	图页	conector
绘制			
审阅		光波导AR眼镜_Btail	
		版本	尺寸	页 2 共 5
嘉立创EDA		V1.0	A4	嘉立创EDA


3.power_main

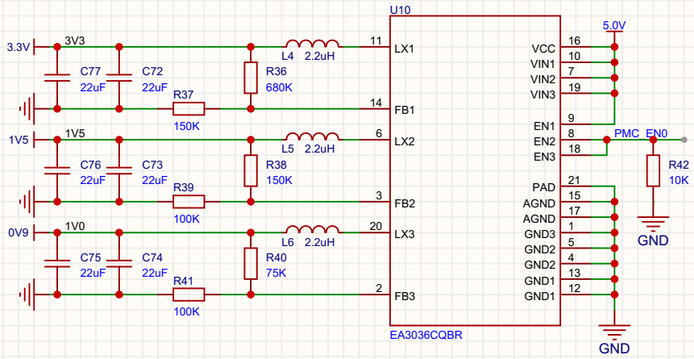


V821_POW_EA3036

原理图	Schematic4	创建日期	2026-05-27
		更新日期	2026-10-10
板子	左镜腿主板下层V1.1	图页	power_v821
绘制		光波导AR眼镜_Btai1	
审阅			
		版本	尺寸	页 3 共 5
嘉立创EDA		V1.0	A4	嘉立创EDA


1.ch582f

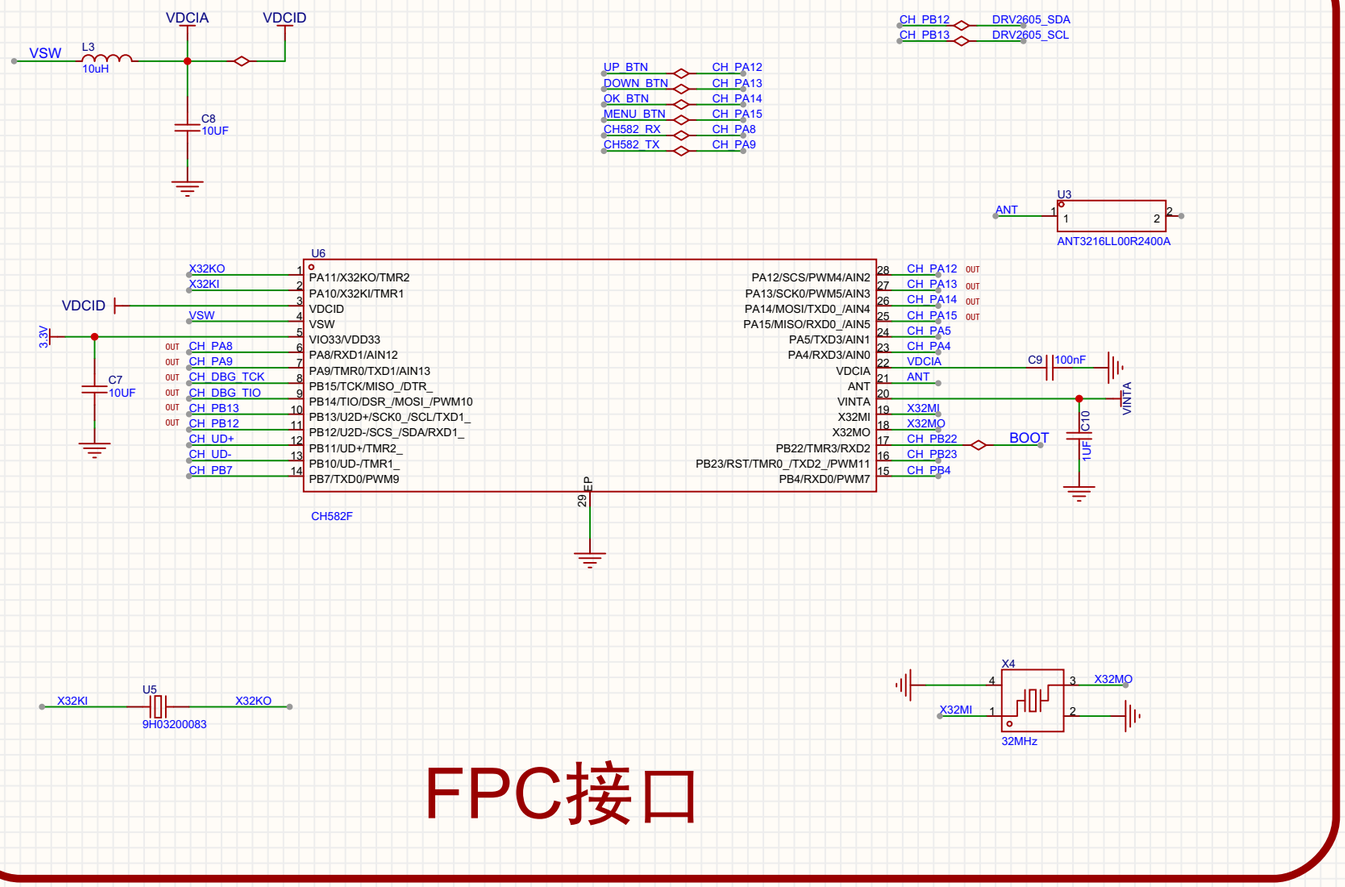

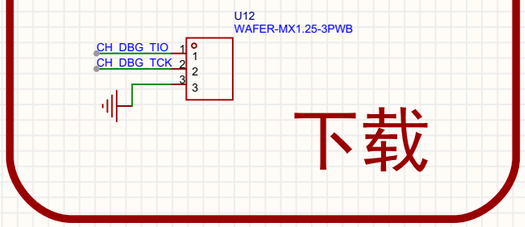


原理图	Schematic4	创建日期	2026-05-27
		更新日期	2026-10-10
板子	左镜腿主板下层V1.1	图页	CH582F
绘制		光波导AR眼镜_Btail	
审阅			
		版本	尺寸	页 4 共 5
嘉立创EDA		V1.0	A4	嘉立创EDA


4.JL7016G8

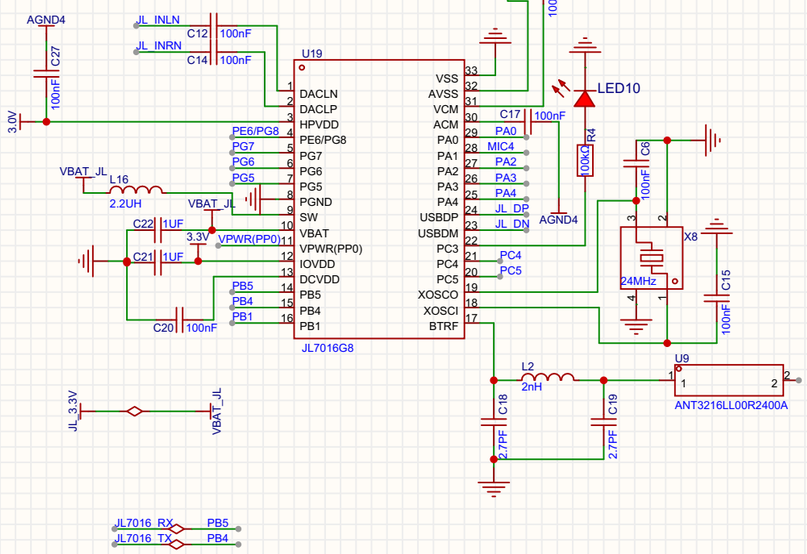


JL7016




MIC



下载

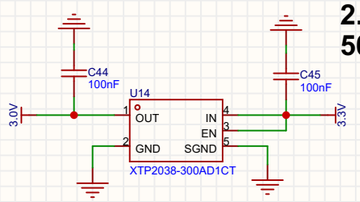

HPVDD_3.0V

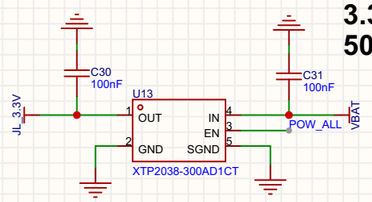

VBAT_3.3V

14	PB5	I/O	GPIO (High Voltage Resistant)	LP_Touch4: Low Power Touch Channel 4; IIC1_SDA_A: IIC1 SDA(A); ADC8: ADC Input Channel 8; UART3RXB: Uart3 Data In(B);

15	PB4	I/O	GPIO (High Voltage Resistant)	LP_Touch3: Low Power Touch Channel 3; CLKOUT0: Clock Out0; SPI4DIA: SPI4 Data In(A); IIC1_SCL_A: IIC1 SCL(A); UART3TXB: Uart3 Data Output(B); TMR2: Timer2 Clock Input;

原理图	Schematic4	创建日期	2026-05-27
		更新日期	2026-10-10
板子	左镜腿主板下层V1.1	图页	jl_7016g8
绘制			
审阅		光波导AR眼镜_Btail	
		版本	V1.0
		尺寸	A4
		页 5 共 5	
嘉立创EDA		嘉立创EDA	