


MODEL RANGE

FM11 6x4 Rigid Air Suspension FM 64R 1A

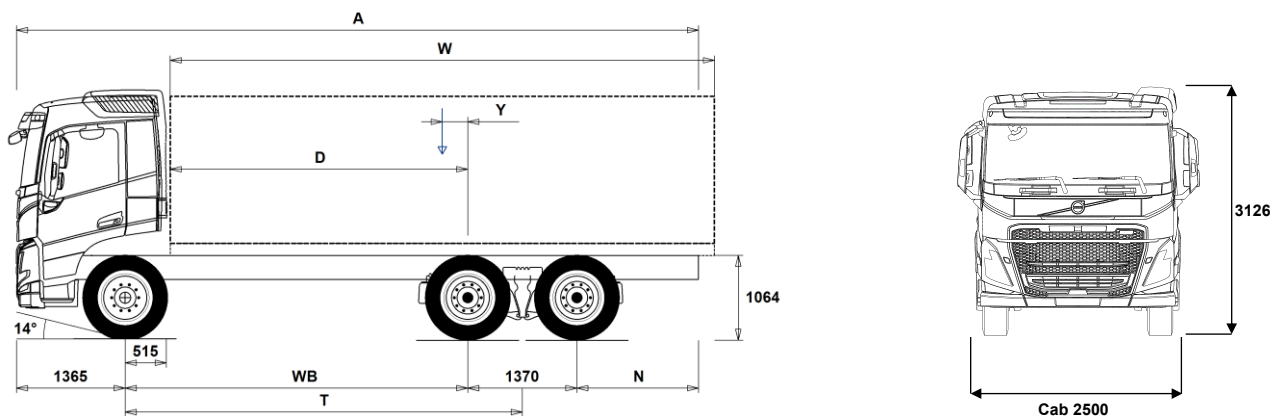

Chassis Dimensions [mm]

WB Wheelbase	3200	3400	3700	3900	4600	4900
A Overall Chassis Length	7710	7310	8460	8760	10560	10310
D Center of rear axle to front of body	2635	2835	3135	3335	4035	4335
N Rear Overhang (Min.)	825	825	825	825	825	825
N Rear Overhang (Max.)	1775	1175	2025	2125	3225	2675
T Theoretical Wheelbase	3885	4085	4385	4585	5285	5585
Y Center of Gravity for Payload (Min.)	-176	-163	-116	-91	2	24
Y Center of Gravity for Payload (Max.)	-176	-163	-116	-91	2	24
W Body Length (Min.)	5621	5971	6451	6771	7891	8371
W Body Length (Max.)	5621	5971	6451	6771	7891	8371

Chassis Weights [kg]

Front Axle	4545	4595	4575	4580	4585	4630
Rear Bogie	3560	3510	3590	3600	3705	3650
Kerb Weight	8105	8105	8165	8180	8290	8280
Payload (including body, driver, fuel, etc.)	14895	14895	14835	14820	14710	14720

Turning Diameter [mm]

Turning Circle Diameter Kerb to Kerb	13900	14500	15500	16100	18200	19100
Turning Circle Diameter Wall to Wall	15300	15900	16900	17500	19600	20500

Plated Weights [kg]

	Plated	Design
Gross Vehicle Weight	23000	28100
Gross Combination Weight	40500	44000
Front Axle	6500	7100
Rear Bogie	16500	21000

Important Notes

Chassis Dimensions

Cab Height: +328 mm for CAB-HSLP, -262 mm for CAB-LDAY, -262 mm for CAB-LSLP, +16 mm for CAB-SLP.

Front Axle to Back of Cab: +431 mm for CAB-HSLP and CAB-SLP, -69 mm for CAB-LDAY, +425 mm for CAB-LSLP.

D-measure includes a front clearance of 50 mm and for rigid trucks also a subframe of 100 mm.

Height can vary ± 20 mm for leaf and ± 10 mm for air suspension.

All dimensions are for unladen chassis and any tag axles down. Chassis height used: CHH-HIGH.

Rear overhang used for vehicle weight calculation is the maximum rear overhang (N Max.) for selected wheelbase.

Height change when chassis height CHH-MED, FRAME300: 0 mm.

Weight and dimensions are based upon the following tyres:

Front Axle Tyres: 315/80R22.5

Drive Axle Tyres: 315/80R22.5

Chassis weight includes oil, water, AdBlue, 0 litres fuel and without driver. Kerb weight can vary $\pm 3\%$.

Turning diameters are theoretically calculated.

Legal weights can differ from country to country.

For more detailed weight information, including optional equipment weights, ask your Volvo sales contact to enter your specification into the Volvo Weight Information system (WIS).

Do NOT use this drawing for bodybuilding. Refer to Volvo Bodybuilder Instructions and chassis assembly drawing FM64R1A.

MODEL RANGE

FM11 6x4 Rigid Air Suspension FM 64R 1A

Truck use

- ☐ **RC-ROUGH** Operating class on/off road
- ☐ **RC-SMOOT** Well Maintained Surfaced Roads >95% Driving Distance
- ☐ **TIPP-PRE** Tipper Preparation
- ☒ **UNIFORM** Basic uniform vehicle

Core components

- ☐ **CHH-HIGH** Chassis Height High approx. 1025-1050mm (depending on tyre selection)
- ☐ **CHH-MED** Approximate chassis height 900 mm
- ☒ **RADD-GR** Rear Air Suspension
- ☒ **FM-DAY6** Day Cab
- ☒ **FM-HSLP6** Globetrotter Cab
- ☐ **FM-LDAY6** Low Day Cab
- ☐ **FM-LSLP6** Low Sleeper Cab
- ☐ **FM-SLP6** Sleeper Cab
- ☒ **EU6SCR** Eu6 SCR (Particulate Filter & EGR) Single Stage Turbo
- ☒ **D11S380A** Eu6 Fuelface 11 litre Engine 380hp/1800nm/280kW
- ☐ **D11S430A** Eu6 Fuelface 11 litre Engine 430hp/2050nm/317kW
- ☐ **D11S460A** Eu6 Fuelface 11 litre Engine 460hp/2200nm/339kW
- ☐ **D11K380** Eu6 11 litre Engine 380hp/1800nm/280kW
- ☐ **D11K430** Eu6 11 litre Engine 430hp/2050nm/317kW
- ☐ **D11K460** Eu6 11 litre Engine 460hp/2200nm/339kW
- ☒ **EBR-VEB** Volvo Engine Brake (VEB)
- ☒ **AT2612** Volvo I-shift 12 Speed Automatic Transmission (2600nm)
- ☒ **RVC1** Australian Road Friendly Certification
- ☐ **RTS2310A** Single Reduction Tandem 23t GCW100t
- ☒ **RTS2370B** Single Reduction Tandem 23t GCW70t

Packages

- ☒ **INFOHIGH** High Level Information Platform

Chassis

- ☐ **FST-AIR** Air Bag Front Suspension
- ☒ **FST-PAR** Parabolic leaf spring front suspension
- ☐ **FST-PAR3** 3 Leaf Parabolic Front Springs (stiffer than normal)
- ☐ **FST-PL1** 2 Leaf Parabolic Front Springs - Lightweight Composite Support Leaf (normal stiffness)
- ☐ **FSLB-BAS** Front Suspension Levelling Stroke - Standard
- ☐ **FAL6.5** Front Axle Load 6.5 tonnes
- ☒ **FAL7.1** Front Axle Load 7.1 tonnes
- ☐ **FAL7.5** Front Axle Load 7.5 tonnes
- ☒ **FALIM** Front axle load limiter
- ☒ **FSTAB** Front stabilizer, normal stiffness
- ☒ **FSTAB2** Front stabiliser bar increased stiffness
- ☐ **FSTAB3** Heavy duty front stabiliser bar
- ☒ **RAL21** Rear suspension load rating: 21,000 kg
- ☒ **RSTAB3** Heavy duty rear stabiliser bar
- ☒ **ASF-DL1** Air Susp. Feature - 1 Driving Level
- ☐ **ACTST-TO** Volvo Dynamic Steering
- ☐ **ASFE-PO** Dynamic Steering Active Features - Personal Settings & Oversteer Guidance
- ☐ **ASFE-PS** Dynamic Steering Active Features - Personal Settings
- ☒ **PSS-SING** Power Steering System - Single
- ☒ **PSP-VAR2** Power Steering Pump with Electronic Control Variable Displacement
- ☒ **EBS-MED** Electronic Brake System (EBS) contains ABS, Traction control, Hill start aid
Diff lock control, Brake assist
Wheel brake monitoring, EBS status
- ☐ **AUXPARK** Auxiliary parking brake

☒ Standard Equipment

☐ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification.
The specification can vary from country to country.

- ☒ **RST-AIR** Rear Air Suspension
- ☒ **FRAME300** Frame rail height 300mm
- ☒ **FST7070** Frame Section Thickness 7mm
- ☐ **FST8080** Frame Section Thickness 8mm
- ☒ **FIL-FBEB** Liner (inner) - front of bogie to end of bogie
- ☐ **FIL-TXEB** Liner (inner) - trans x-mem to end of bogie
- ☒ **BBOX-L** Battery box mounted on LHS chassis rail
- ☒ **BATS-S** Battery system - single
- ☒ **2BATT225** 2x225 Ah batteries
- ☐ **BATTAMP** Battery Amperage Indicator (in the DID)
- ☒ **MSWI-C** Isolation Toggle Switch LHS of Chassis
- ☐ **MSWI-R** Isolation Switch on Key Fob (Press Door Lock Twice to Isolate)
- ☒ **R345A71** RHS 345 litre Alloy Fuel Tank
Min volume 345l
Max volume 465l
- ☒ **UL-FUEL** LHS fuel tank not fitted
Min volume 195l
Max volume 195l
- ☒ **ADTP-L** AdBlue Tank Position - LHS
- ☒ **ADB064** AdBlue Tank 64 litres
- ☐ **ADB090** AdBlue Tank 90 litres
- ☐ **ADTC-BF** AdBlue Tank Cover - Bright Finish
- ☒ **FCAP-L** Fuel Tank Cap with Lock
- ☐ **ESH-REAR** Low Mounted Muffler with Low Rear Facing Outlet
- ☒ **ESH-RIGH** Muffler horizontal, right exhaust outlet
- ☐ **ESH-VERT** Muffler horizontal, vertical exhaust outlet on right hand side
- ☐ **EXST-SSP** Stainless Steel Exhaust Stack
- ☒ **TOWF-NO1** One Towing Device - Front
- ☒ **TRBR-HCR** Hand controlled trailer brake, reduced pressure
- ☒ **TRBR-STA** Stationary Trailer Brake Control
- ☐ **TRB-STRE** Automatic Trailer Brake Activation (Stretch Brake)
- ☐ **ATANK-AL** Aluminium Airtanks
- ☒ **TL-LED** LED Tail Lights
- ☒ **BLIGHT-E** Emergency Brake Lights

Rims and Tyres

- ☐ **RT-AL** 10 Stud Alloy Disc Rims (with long wheel studs)
- ☐ **RT-AL1** 10 Stud Alloy Level 1 Disc Rims (with long wheel studs)
- ☐ **RT-AL1DU** 10 Stud Alloy Level 1 Disc Rims (with short wheel studs)
- ☐ **RT-ALDP** 10 Stud Dura-Bright Alloy Disc Rims (with long wheel studs)
- ☐ **RT-ALDPD** 10 Stud Dura-Bright Alloy Disc Rims (with short wheel studs)
- ☐ **RT-ALDU** 10 Stud Alloy Disc Rims (with short wheel studs)
- ☒ **RT-STEEL** 10 Stud Steel Disc Rims
- ☐ **SPWT-D** Spare rim & tyre equal to drive
- ☐ **SPWT-F** Spare rim & tyre equal to steer
- ☐ **SWCP-T2** Transport Mounted Spare Wheel
- ☐ **JACK-12T** 12 tonne capacity jack with brace
- ☐ **JACK-15T** 15 tonne capacity jack and brace
- ☒ **TOOL-BAS** Basic tools
- ☐ **TOOLKIT** Tool kit complete
- ☐ **INFLAHOS** Tyre inflation hose (18 metres)

Powertrain equipment

- ☒ **TRAP-HD** Heavy Duty Transmission Internals
- ☒ **DRM-BE** Drive Mode - Balanced & Economy
- ☐ **DRM-E** Drive Mode - Economy
- ☐ **PVT-MAP** Map Based Topography Information (I-See Volvo Connect)
- ☒ **CRUIS-E** Extended Cruise Control

MODEL RANGE

FM11 6x4 Rigid Air Suspension FM 64R 1A

☐ AMSO-AUT	Manual gear shift in automatic mode.	☐ ALARM-B	Anti-theft alarm (cab)
☐ AVO-ENH	AMT Vocational option - enhanced	☐ BUPMON	Back-Up Camera
☐ APF-ENH	Enhanced I-Shift PTO Functions	☒ ISUNS-DS	Interior Side Sunvisor - Driver's Door
☒ CS43B-O	Volvo 430mm single plate clutch	☐ ISUNF-B	Interior front sunvisor - standard
☒ TC-MAOH2	High performance transmission cooler	☐ ISUNF-MD	Interior front sunvisor - with mirror (driver's side)
☐ 2COM1100	Air Compressor - 1100 litres/minute	☐ ISUNF-RE	Windscreen Interior Sunvisor - Electric
☒ 2COMP870	Air Compressor - 870 litres/minute	☒ ISUNF-RM	Windscreen Interior Sunvisor - Manual
☒ AIRIN-HI	High air intake, roofline position	☐ ADFS	2 Din Slots in Front Shelf
☐ AIRIN-LO	Low air intake, rear of cab position	☒ BUPALARM	Reverse alarm
☒ ACL1ST-S	Air cleaner with two stage filter element	☐ LOADIND	Load indicator, electronic controlled suspension (SUSPL-EC)
☒ 24A110BL	Alternator - 110 Amp	☐ REMC-MF	Multifunction Wireless Remote Control
☐ 24A150BL	Alternator - 150 Amp	☒ FIREX25A	Fire Extinguisher - 2.5 kg
☒ PRIM-MAN	Pump Prime - Manual	☒ WRITEPAD	Writing pad
☐ AF-R	Recirculation heated fuel filter	☒ DST-CF5	Fully adjustable driver's comfort seat Air suspension, heated, integrated safety belt
☒ FUEFE2LW	Dual fuel filter, engine mounted with water separator-large	☐ SBD-RED	Red safety belts, pass. & driver seats
☐ PTER-100	PTO Engine Rear Mounted with Flange DIN100/ISO7646	☒ SBPRE-DS	Drivers seat belt pretensioner
☐ PTER-DIN	Power Take Off / splined shaft groove (female) DIN5462.	☒ PST-BAS1	Basic passenger's seat
☐ PTER1400	Rear engine mounted power-take-off with flange SAE 1410	☐ PST-CF5	Fully adjustable passenger comfort seat Air suspension, heated, safety belt
☐ HPE-F101	F1-101 Hydraulic pump rear engine mounted	☐ SBPRE-PS	Passenger Seatbelt Pretensioner
☐ HPE-F41	F1-41 Hydraulic pump rear engine mounted	☐ ARMRE-BB	Armrests both sides - driver's & passenger's seat
☐ HPE-F51	F1-51 Hydraulic pump rear engine mounted	☒ ARMRE-DB	Armrests both sides - driver's seat
☐ HPE-F61	F1-61 Hydraulic pump rear engine mounted	☒ ARU-BAS	Seat armrest upholstery - basic
☐ HPE-F81	F1-81 Hydraulic pump rear engine mounted	☒ FMAT-RUB	Floor Mats - Rubber
☐ HPE-T53	F2-53/53 twin flow hyd pump rear engine mounted	☐ FMAT-TX2	Floor Mats - Textile & Rubber
☐ HPE-T70	F2-70/53 twin flow hyd pump rear engine mounted	☐ LBK70	Lower Bunk 700mm Wide
☐ HPE-V45	V1-45 variable pump rear engine mounted	☐ MATL-FI	Spring Mattress Lower Bunk - Firm (100kg +)
☐ HPE-V75	V1-75 variable pump rear engine mounted	☐ MATL-SF	Mattress lower bunk - semi firm
☐ PTR-D	Low speed PTO with DIN connection	☐ OLMAT-BA	Mattress overlay - basic
☐ PTR-DH	High speed PTO with DIN connection	☐ TBK70F	Top Bunk 700mm Wide - Foldable
☐ PTR-DM	Medium speed PTO with DIN connection	☐ SLCP-BAS	Sleeper Control Panel - Standard
☐ PTR-F	PTO Flange Connection - Low Speed	☐ SAFE	Safe box at bed-end
☐ PTR-FH	High speed PTO with flange connection	☐ ETSB-F	Engine Tunnel Storage Box
☐ PTR-FL	Low speed PTO with flange connection	☐ ETSB-FR	Storage Box - Engine Tunnel & Rear Cab Wall
☐ PTRD-D	PTO 2 DIN Connections - (Front & Rear)	☐ ETSB-R	Rear Cab Wall Storage
☐ PTRD-F	PTO with 1 flange connection	☐ RUS-BAS	Rear Upper Cab Storage - 154 Litres for Sleeper/Globetrotter & 60 Litres for Day Cab
☐ HPG-F101	F1-101 Hydraulic Pump	☐ RUS-HIG	Rear Upper Cab Storage - 245 Litres
☐ HPG-F41	F1-41 Hydraulic Pump	☐ TABLE	Table
☐ HPG-F61	Parker F1-61 hydraulic pump (transmission mtd)	☐ REF-ICPK	Refrigerator Preparation Kit on Engine Tunnel
☐ HPG-F81	F1-81 Hydraulic Pump	☐ REFR-RUS	28 Litre Refrigerator in Upper Rear Storage
☐ DRC-AMII	DPF Regeneration- Auto Initialise/Manual on Demand/Manual Inhibit	☐ MICRO-PK	Preparation Kit for Microwave
☒ DRC-AUTO	DPF Regeneration- Fully Automatic (in motion)	☐ BOTH-D	Bottle Holder in Driving Area
☒ ACCLF-D	Acceleration Limiting Feature - Disabled	☒ INLI-BAS	Interior night lights
☒ ESP-BAS1	ESP Package (Tractor/Trailer Combinations with ABS/EBS Or Rigid with Standard COG)	☐ INLI-NL	Interior White & Red (night) Light
☒ HWSS-ACB	ACC & forward collision warning & emergency braking.	☐ INLI-NLD	Interior light including night light and dimmer function
☒ LSS-DW	With lane departure system	☐ ARL-FLEX	Flexible Reading Lamp (Snake Light)
☐ LSS-DW3	Pilot Assist - Active Continuous Lane Keeping	☐ RH-ER	Roof Hatch - Electric (Metal Emergency Exit)
☒ LCS3	LCS with Side Collision Avoidance Support (LHS) & Emergency Braking	☒ RH-MTR	Roof Hatch - Manual (Tinted Glass & Rear Opening)
☒ DAS-W	Driver alert support warning	☐ SWIND-PS	Cab Passenger Side Aux. Window
☐ DAS-W2	Driver Alert Sensing System (monitoring of vehicle handling & driver attention)	☒ AWIND-RF	Cab Rear Window- Fitted
☒ PB-AUT2	Park Brake Applied Automatically When Driver Leaves Seat	☐ VANMIR	Vanity Mirror
☐ RSENS-W	Rain Sensor to Activate Wipers	☐ AS-FUS	Auxiliary Shelf - Front Upper Storage
☐ CU-ECC	Climate controlled air conditioning		
☒ CU-MCC	Manual controlled air conditioning		
☐ IGT-BUT	Ignition Type - Push Button		
☐ IMMOBIL	Engine Immobiliser		

☒ Standard Equipment

☐ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification. The specification can vary from country to country.

MODEL RANGE

FM11 6x4 Rigid Air Suspension FM 64R 1A

- ☐ **INFOT-PK** LCD screen mount - 6kgs max

Cab exterior

- ☐ **EXTL-BA2** Standard Exterior Trim Level 2
☒ **EXTL-BAS** Standard Exterior Trim Level
- ☒ **DGLAS-H** Hardened Door Glass
☐ **DGLAS-L** Laminated Door Glass
- ☒ **BUMP-B** Bumper - Plastic
☐ **BUMP-B2** Bumper - Steel
- ☐ **WILDBAR** Wildbar
- ☐ **BUMP-SP** Bumper spoiler
- ☒ **BUGNET** Insect Net in Front of Radiator
- ☒ **CTILT-P-E** Electrical Cab Tilt Pump
- ☐ **FCABS-A** Front Cab Suspension - Air Bellows
☒ **FCABS-M** Front Cab Suspension - Mechanical Spring
- ☐ **RCABS-A** Rear Cab Suspension - Air Bellows
☒ **RCABS-M** Rear Cab Suspension - Mechanical Spring
- ☐ **MIRCMS** Camera Monitor System - Without Exterior Mirrors
☒ **MIRFLACP** Electrically Heated & Operated Flat Glass Mirrors with Front Monitoring Camera on Passenger Side
- ☐ **AMIR-F20** Close view mirror
- ☒ **SUNV-H** Exterior Sunvisor
- ☐ **AD-ROOF** Aero-dynamic roof mounted deflector
- ☐ **AD-SIDES** Aero-dynamic cab side deflectors
- ☐ **GUARD-W** Windscreen Stoneguard
- ☒ **HL-BASIC** Standard head lamps
☐ **HL-LED** LED Headlights
☐ **HL-LED3** LED Headlights with Adaptive High Beam
- ☐ **HBDA-A** Automatic High Beam De-Activation
- ☐ **HL-CLEAN** Head lamp cleaning system
- ☐ **HLP-ST** Headlight Protection - Steel
- ☐ **HL-ADJ** Headlight Adjustment - Manual
- ☒ **DRL-LED** V-shaped LED Daytime Running Light
- ☐ **DRIVL2** Integrated driving lamps
☒ **UDRIVL** Without Integrated Driving Lights
- ☐ **FOGL-WC** Integrated fog lamps
- ☐ **CL-STAT** Corner light-static
- ☐ **ASL-RF2** Spotlights Inside Globetrotter Sign Box
- ☒ **IDLAMP-A** Identification Lamps - Amber
- ☐ **BEACON-P** Beacon Light Wire Preparation
- ☒ **CABPT-R2** 2 cab roof pass throughs, 1 on each side
- ☐ **SPOTP-F** Aux spotlight preparation, 280W maximum
- ☐ **CSGN-GTR** Globetrotter Decal
- ☒ **HORN-F1S** Single Electric Jericho Air Horn (Behind Grill)
- ☐ **ANT-CBR** Antenna for CB Radio (Single Antenna)

Superstructure

- ☐ **SRWL-2RW** 2 Rear Chassis Mounted Working Lights - White
☐ **SRWL-PK** Wiring Prep for Chassis Mounted Working Lights - 3 Position Switch
- ☐ **SWL-PK** Wiring Prep for Chassis Mounted Working Lights - 2 Position Switch
- ☐ **WL-CHPK** Chassis Mounted Working Light Prep Kit
- ☐ **WLC-H2W** 2 LED Work Lights - High Mounted
☐ **WLC-PKH** Prep Kit for High Mounted Work Lights

■ Standard Equipment

☐ Optional Equipment

For more detailed information about cab and powertrain equipment, please refer to separate specification sheets.

For all possible options and combinations of options please consult your Volvo sales contact who can create a specification to match your requirements using the Volvo Sales Support system (VSS).

The factory reserves the right to modify design and change equipment without previous notification.
 The specification can vary from country to country.

- ☒ **ECBB-HIG** Body Builder Module - Cab Module (14 High/4 Low)
- ☒ **BBCHAS3** Body Builder Chassis Electrical Interface - 3 x 7 Pin Connectors
- ☐ **EXSTER** External Steering via Body Builder's Module
- ☒ **TD-LED** LED trailer detection sensor
- ☐ **HBA-SB** Holes for Body Attachments
- ☒ **AESW2** 2 Flexible Switches (AUX1 and AUX2).
☐ **AESW2PK** 2 Flexible Switches (AUX1 & AUX2) + Additional 4 Flexible Switches
- ☒ **AUXSW-4** Wiring Prep. for 4 Extra Bodybuilder Switches (switches not included)

Delivery services

- ☒ **TGW-4GWL** Telematics Gateway with 4G/LTE & WLAN
- ☐ **FMS-PK** Fleet Management System Gateway
- ☐ **DRUT1** "My Truck" Smartphone App. 1 Year Prepaid
☐ **DRUT2** "My Truck" Smartphone App. 2 Year Prepaid
☐ **DRUT3** "My Truck" Smartphone App. 3 Year Prepaid
☐ **DRUT4** "My Truck" Smartphone App. 4 Year Prepaid
☐ **DRUT5** "My Truck" Smartphone App. 5 Year Prepaid
- ☒ **TSRS2** Traffic Sign Recognition System

MODEL RANGE

FM11 6x4 Rigid Air Suspension FM 64R 1A

Volvo Trucks. Driving Progress