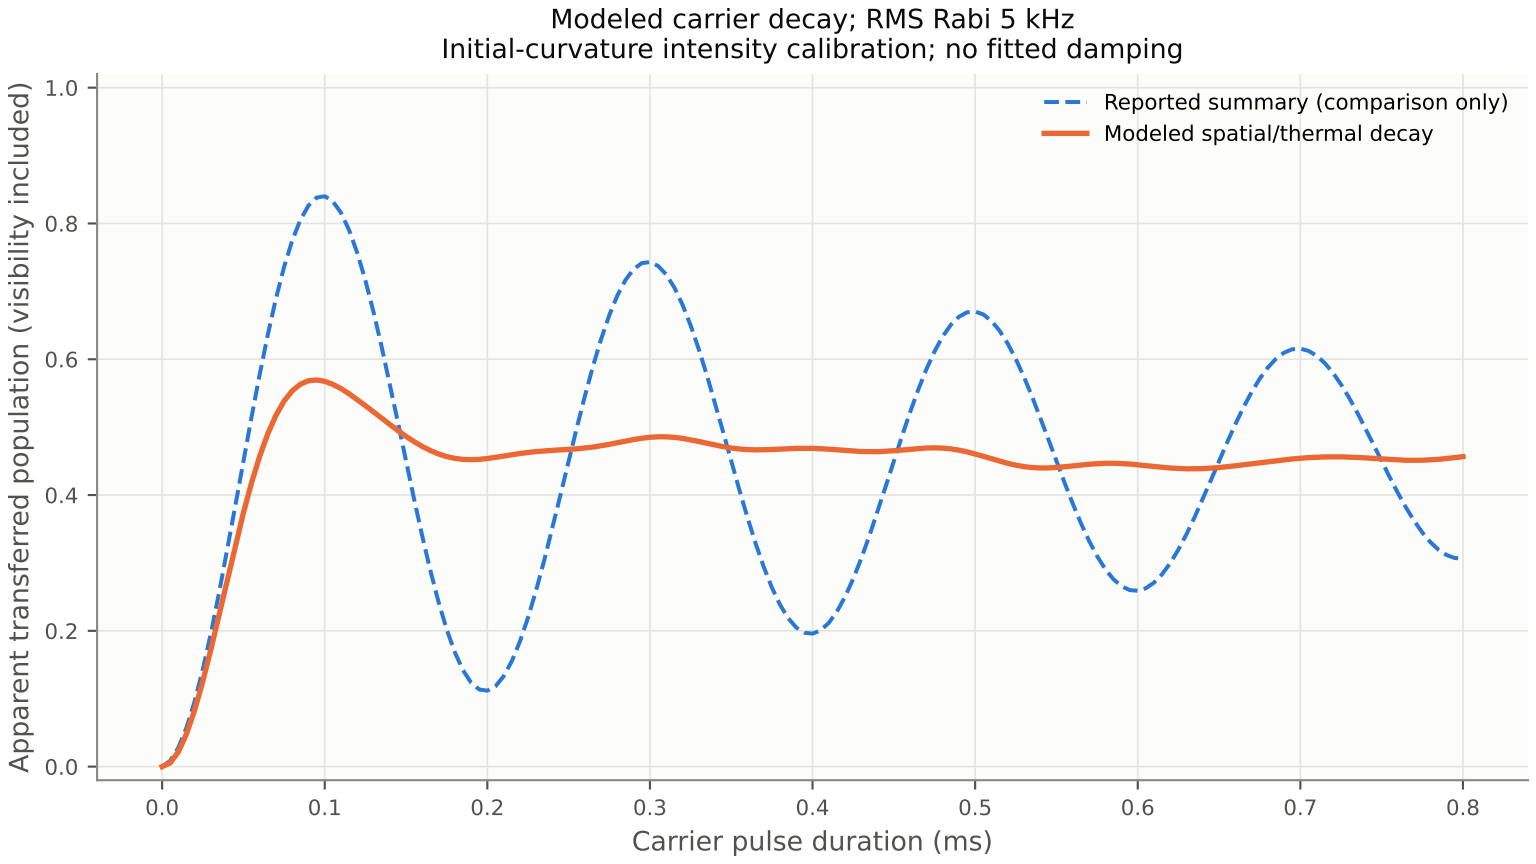
Modeled carrier decay; RMS Rabi 5 kHz
Initial-curvature intensity calibration; no fitted damping
Reported summary (comparison only)
Modeled spatial/thermal decay
Apparent transferred population (visibility included)
1.0
0.8
0.6
0.4
0.2
0.0
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
Carrier pulse duration (ms)