



**Autonomous Vehicle Simulation (AVS) Laboratory,  
University of Colorado**

**Basilisk Technical Memorandum**

Document ID: Basilisk-MRP\_PD

**PROPORTIONAL-DERIVATIVE (PD) MRP ATTITUDE FEEDBACK CONTROL**

Prepared by	H. Schaub
-------------	-----------

<b>Status:</b> First Release
<b>Scope/Contents</b>
Summary of the document goes here.

Rev	Change Description	By	Date
1.0	Initial Release	H. Schaub	2019-03-29

## Contents

1	Model Description	1
2	Module Functions	1
3	Module Assumptions and Limitations	1
4	Test Description and Success Criteria	2
5	Test Parameters	2
6	Test Results	2
7	User Guide	2

---

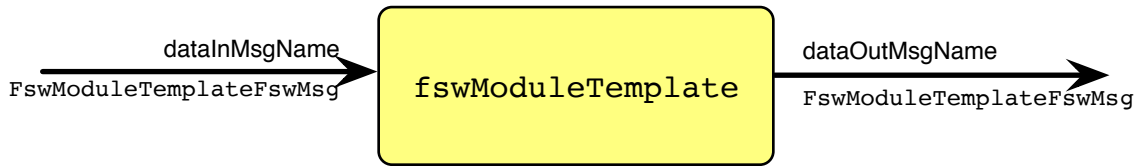


Fig. 1: Illustration of the module input and output messages.

## 1 Model Description

This attitude feedback module using the MRP feedback control related to the control in section 8.4.1 in Schaub and Junkins.<sup>1</sup>

$$\mathbf{L}_r = -K\boldsymbol{\sigma} - [P]\delta\boldsymbol{\omega} + [I](\dot{\boldsymbol{\omega}}_r - [\tilde{\boldsymbol{\omega}}]\boldsymbol{\omega}_r) + [\tilde{\boldsymbol{\omega}}][I]\boldsymbol{\omega} - \mathbf{L} \quad (1)$$

Note that this control solution creates an external control torque which must be produced with a cluster of thrusters. No reaction wheel information is used here. Further, the feedback control component is a simple proportional and derivative feedback formulation. As shown in Reference 1, this control can asymptotically track a general reference trajectory given by the reference frame  $\mathcal{R}$ .

## 2 Module Functions

- **Compute an external control torque:** The control torque is assumed to be an external control torque
- **Track general attitude trajectory:** The control solution is an asymptotically stabilizing reference trajectory tracking control.

## 3 Module Assumptions and Limitations

This control assumes the spacecraft is rigid and that the inertia tensor does not vary with time.

## 4 Test Description and Success Criteria

The unit test for this module is kept as there are no branching code segments to account for different cases. The spacecraft inertia tensor message is setup, as well as a guidance message. The module is then run for a few time steps and the control torque output message compared to a known answer. The simulation only variable is if the known external torque  ${}^B\mathbf{L}$  is specified, or if the zero default vector is used.

## 5 Test Parameters

The spacecraft inertia tensor is held fixed. The unit test verifies that the module output torque message vector matches expected values.

**Table 2:** Error tolerance for each test.

Output Value Tested	Tolerated Error
torqueRequestBody	1e-12

## 6 Test Results

The unit tests are expected to pass.

**Table 3:** Test results

setExtTorque	Pass/Fail
False	PASSED
True	PASSED

## 7 User Guide

The following parameters must be set for the module

- K: the MRP proportional feedback gain
- P: the  $\omega$  tracking error proportional feedback gain
- knownTorquePntB\_B: the known external torque vector  ${}^B\mathbf{L}$ . The default value is a zero vector.

## REFERENCES

- [1] Hanspeter Schaub and John L. Junkins. *Analytical Mechanics of Space Systems*. AIAA Education Series, Reston, VA, 4th edition, 2018.