


j4_talk -- pin diagram

Teensy 4.1 + Audio Shield Rev D, component side up, USB at the TOP

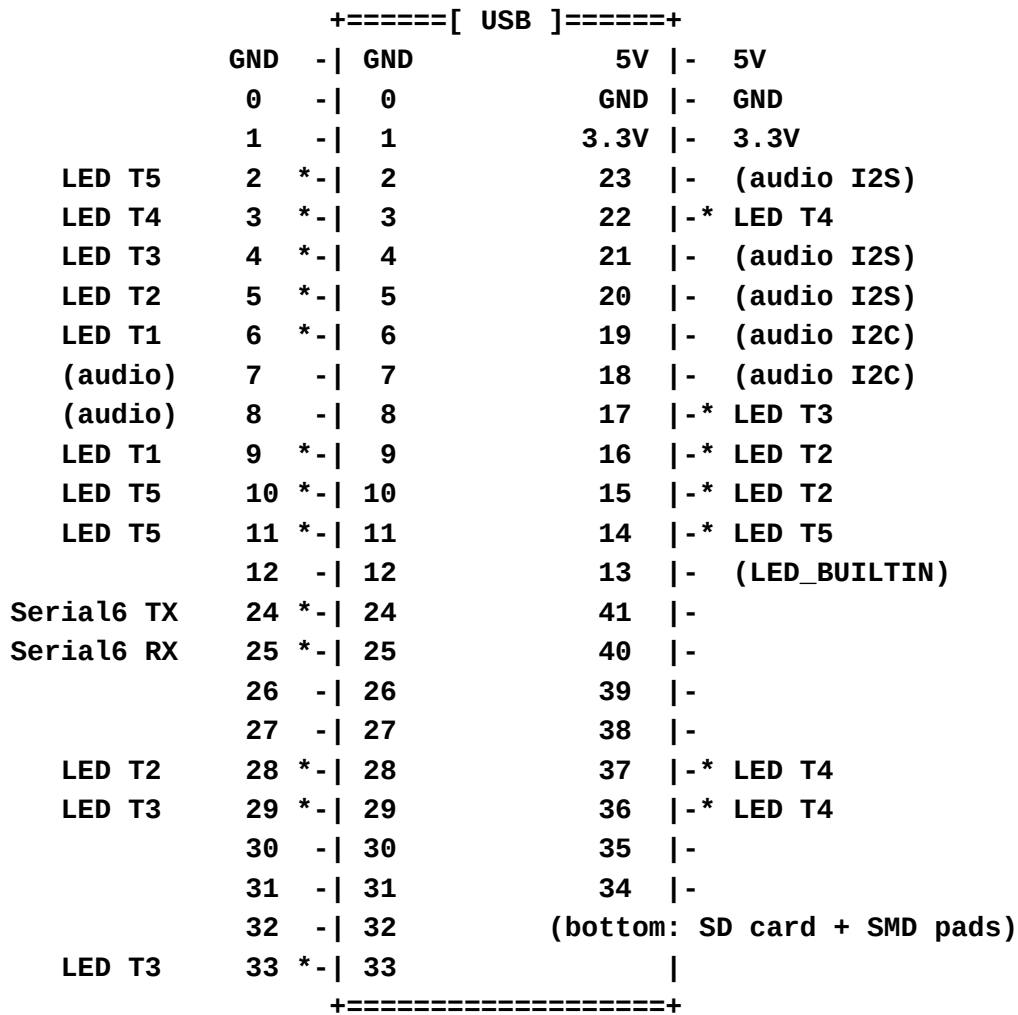

Serial6: 24 (TX) -> j4_receiver GPIO 2 ; 25 (RX) <- j4_receiver GPIO 17

Audio Shield Rev D uses 7, 8, 20, 21, 23 (I2S) + 18, 19 (I2C) + built-in SD.

LED tiers: T1 6,9 | T2 5,16,15,28 | T3 4,17,29,33 | T4 3,22,36,37 | T5 2,14,10,11

Pin(s)	Function
6, 9	Mouth LED tier 1 (innermost pair; PWM via RFP30N06LE MOSFETs)
5, 16, 15, 28	Mouth LED tier 2
4, 17, 29, 33	Mouth LED tier 3
3, 22, 36, 37	Mouth LED tier 4
2, 14, 10, 11	Mouth LED tier 5 (outermost)
24	Serial6 TX to j4_receiver (receiver GPIO 2)
25	Serial6 RX from j4_receiver (receiver GPIO 17)
7, 8, 20, 21, 23	Audio Shield Rev D I2S (do not reuse)
18, 19	Audio Shield Rev D I2C (do not reuse)