


# WIFI LoRa 32 Pinout Diagram

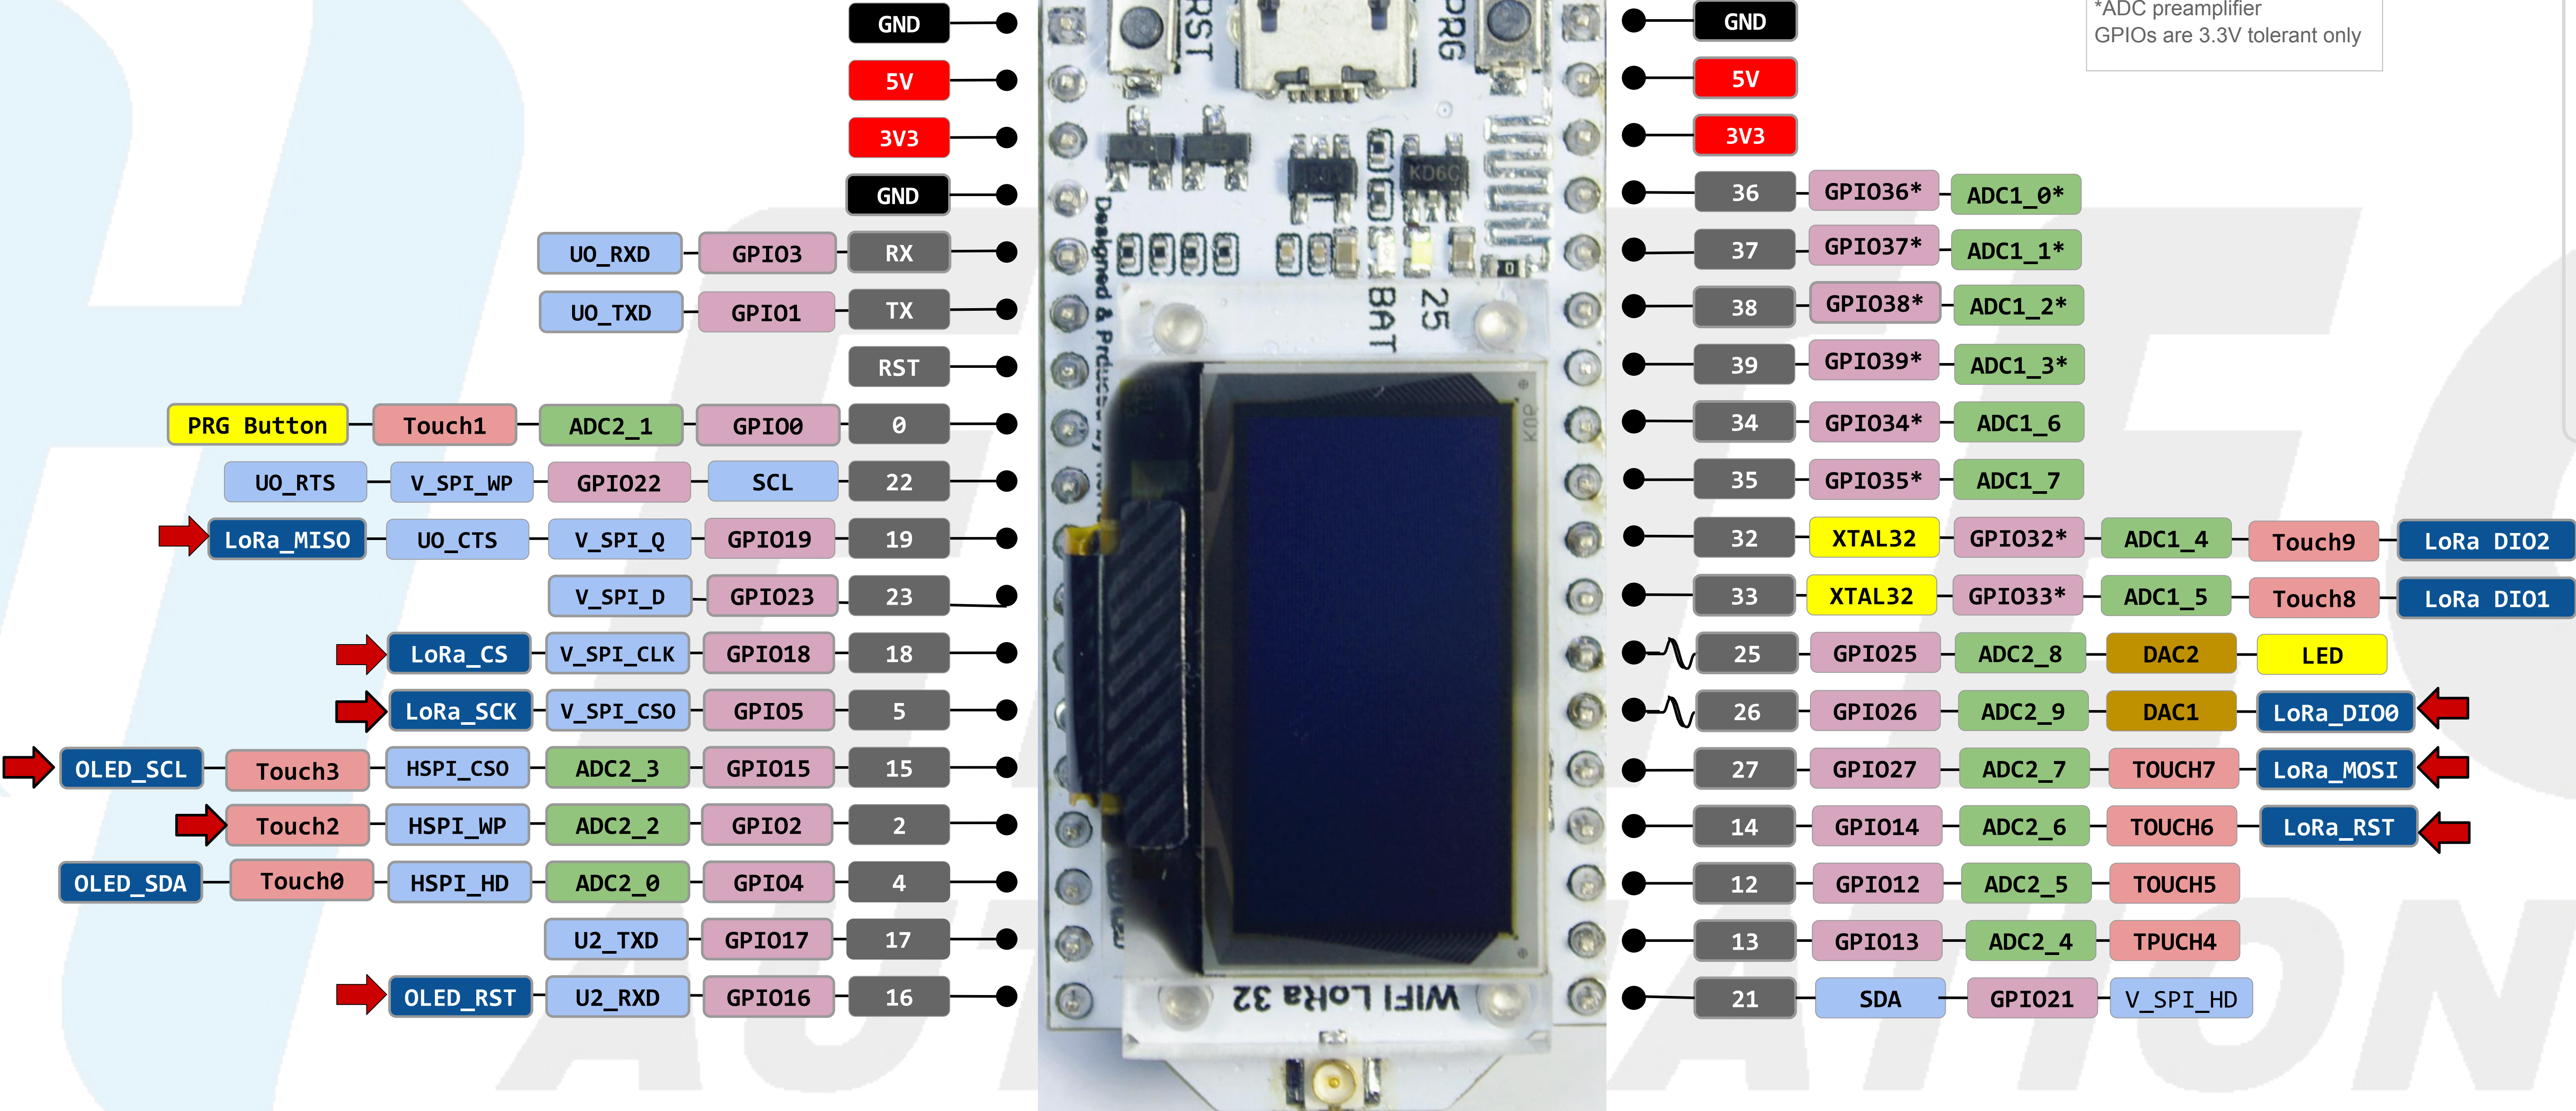

Notes:  
\*GPIO input only  
\*ADC preamplifier  
GPIOs are 3.3V tolerant only

- GND
- Power
- Control
- Touch Pin
- GPIO Port pin
- Analog Pin
- DAC
- Serial SPI I2C
- Physical Pin
- On-board hardware Pin

➡ Pins with this arrow are used by on-board OLED or LoRa, they must not be used for other purpose unless you know what you are doing!