


Mains 230 V AC. >= 8 mm creepage to everything else (keep-out + milled slot under PS1).

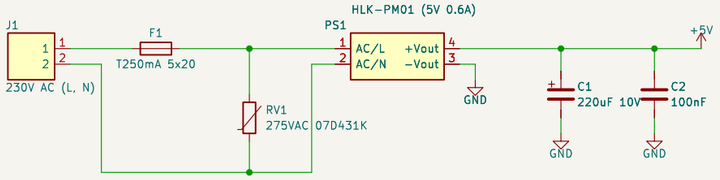


I2C isolation: ESP side (GND) | spa side (GND_SPA). R3/R4 not fitted — the pack has pull-ups.

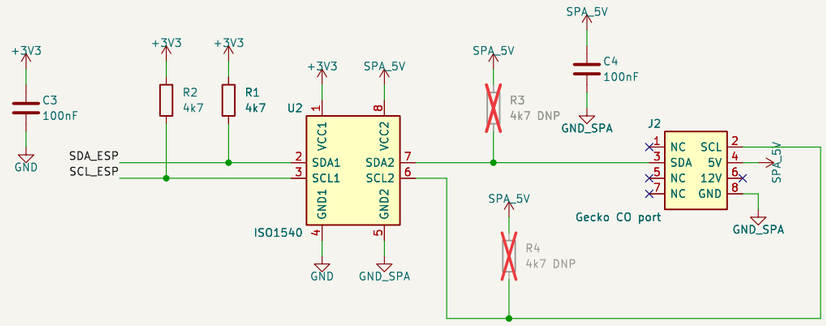

WT32-ETH01 on two 1x13 sockets. Powered on 5V only (never 5V and 3V3 together).

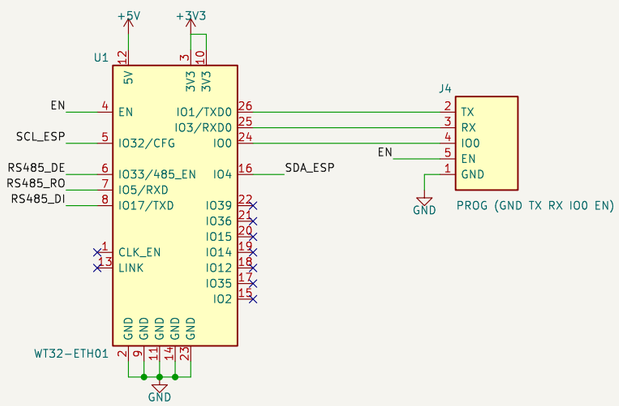

RS485 / Modbus RTU to the pump drives. JP1 = 120R termination, fit at the bus end.

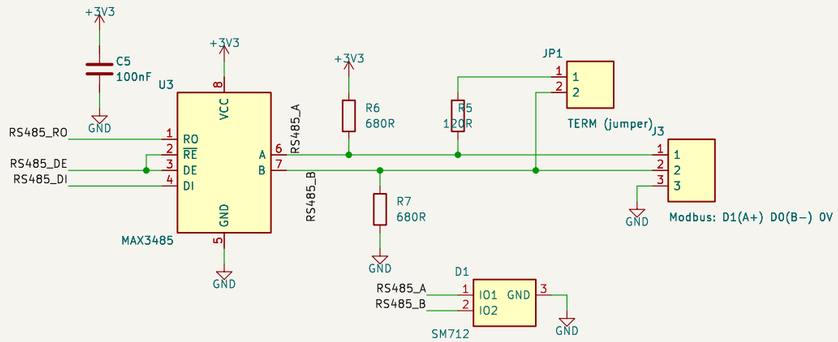



Generated by hardware/tools/gen_sch.py
github.com/AWSb24/esphome-gecko — hardware/gecko-carrier

Sheet: /
File: gecko-carrier.kicad_sch

Title: Gecko in.YE-5 carrier: WT32-ETH01, ISO1540, RS485, HLK-PM01

Size: A3	Date: 2026-11-08	**Rev: 0.2**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1