

230 V AC — mains section. Keep >= 8 mm creepage to everything else (milled slot under PS1).

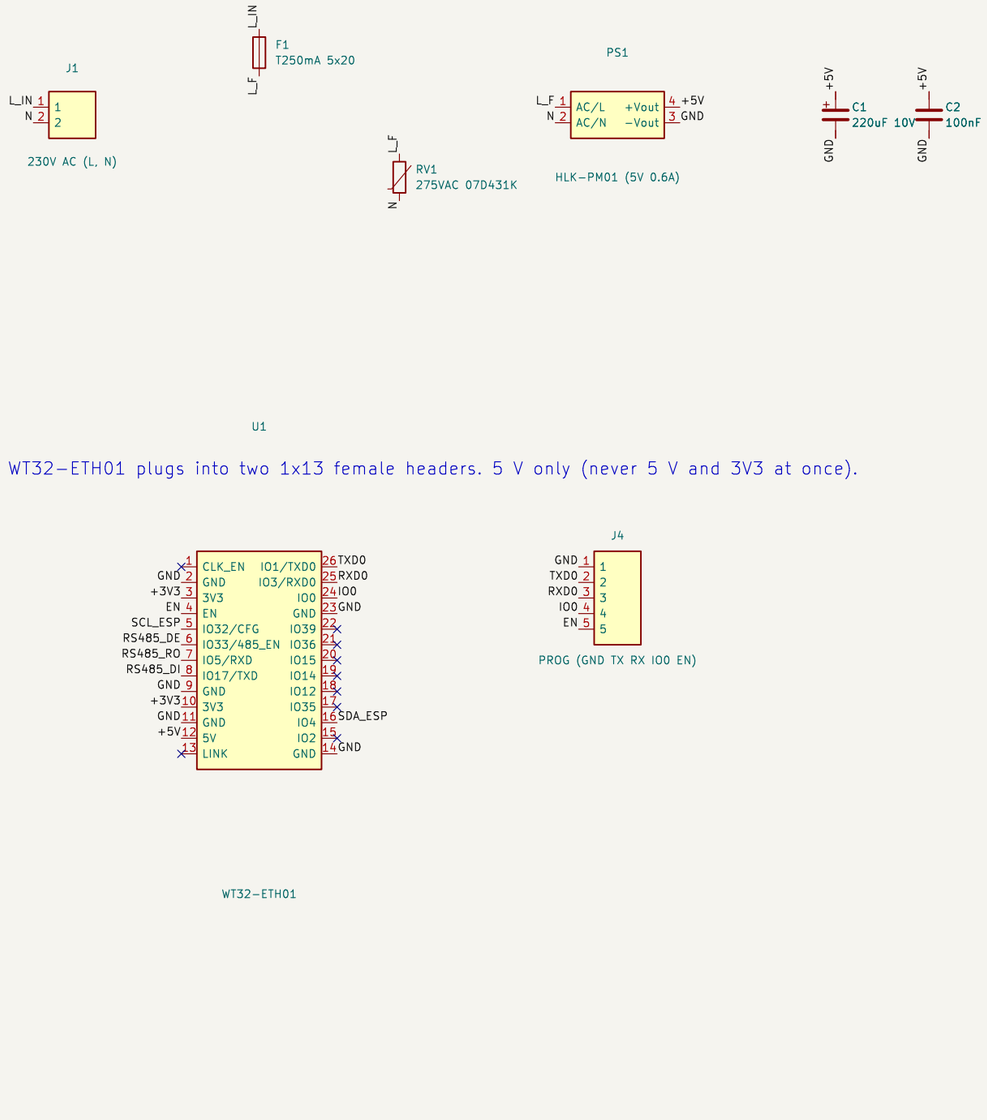


Galvanic isolation: ESP side (GND) | spa side (GND_SPA), barrier under U2.

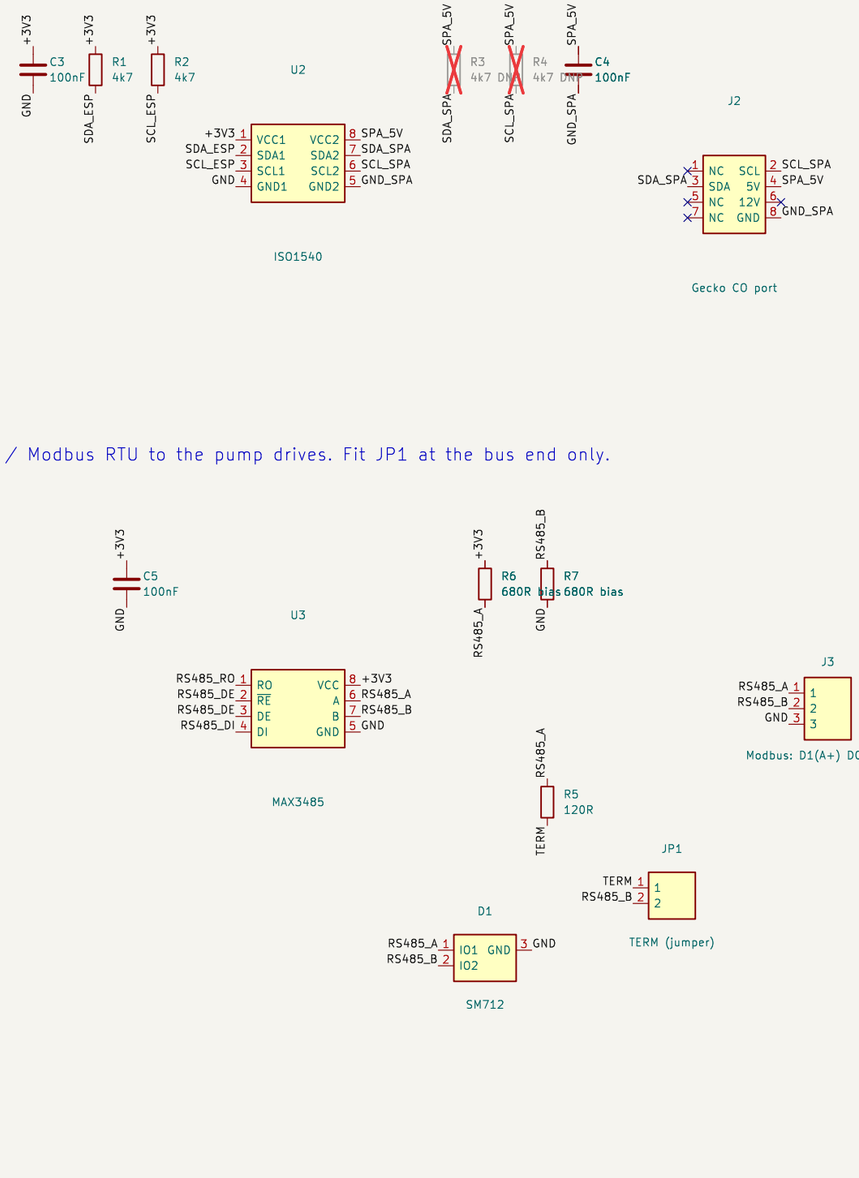

U1

WT32-ETH01 plugs into two 1x13 female headers. 5 V only (never 5 V and 3V3 at once).

RS485 / Modbus RTU to the pump drives. Fit JP1 at the bus end only.



Generated by hardware/tools/gen_sch.py — nets are joined by label name
github.com/AWSb24/esphome-gecko — hardware/gecko-carrier

Sheet: /
File: gecko-carrier.kicad_sch

Title: Gecko in.YE-5 carrier: WT32-ETH01, ISO1540, RS485, HLK-PM01

Size: A3	Date: 2026-11-08	**Rev: 0.1**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1