Radio Standards

WS 2026

Lorenz Mohr, Dr.-Ing. Alexander Ihlow, Prof. Thomas Dallmann

Fachgebiet Elektronische Messtechnik und Signalverarbeitung (EMS)

Technische Universität Ilmenau

1. Introduction

Organization

Lecture
Takes place on Mondays, 03:00 pm - 04:30 pm, in OEC3008 (except winter break)

Tutorial

- Takes place on Tuesdays, 11:00 am - 12:30 pm, in OEC3008 (except winter break)
- No tutorial in the classical sense, instead three group presentations about selected standards
- Learn to understand standards and improve presentation skills
- Topic and group selection via moodle (deadline next lecture)
- DVB, 0G-5G, WiFi, and Bluetooth not selectable, will be covered in this lecture
- Feel free to suggest interesting standards by yourself

Prerequisites

- Signal and system theory
- Basic engineering math

Lecture Material

- Please enroll in the Moodle course
- Lecture script will grow throughout the semester

Exam Regulations

Exam

- **30 min** oral exam
- Standards presented by your groups will be part of the exam

Bonus Points

Presentations give bonus points for the exam

Maximum: One-third grade step

e.g. $2.7 \rightarrow 2.3$, $1.3 \rightarrow 1.0$

Overall Goal

How to work with standards

Understand why standards exist	How to read them	How to understand them (on technical level)	How to make use of them

Electronic Measurements and Signal Processing Group EMS

We investigate the behavior of radio propagation channels and develop methods to make them usable.







- Development of measurement equipment for characterizing radio channels from 0 Hz to 300 GHz
- Measurement, simulation, and modeling of radio channels
- Analysis of radio channel characteristics using signal processing - high-resolution estimation methods and AI

- Exploitation of radio channel characteristics for environmental sensing - radar technology and Integrated Communications and Sensing (ICAS)
- Emulation of electromagnetic wave propagation for testing mobile and satellite communications
- Standardization and development of solutions relevant to mobile communications standards

Radio Standards several decades ago...

... by Dr.-Ing. Alexander Ihlow

Topics to be Covered I

1. Technical Preliminaries
   - LTI Channel
   - Fourier Transformation
   - Spatial Processing
2. Propagation in a Nutshell (by Alexander Ihlow)
   - How do cable, satellite, and air interfaces differ from each other?
3. Standardization 101
   - How is the electromagnetic spectrum occupied?
   - What is a standard?
   - What is a standardization body?
   - What is a patent?
4. Evolution of Cellular Standards
   - 0G-2G
   - 3G
   - Deep dive OFDM
   - 4G
   - 5G

Topics to be Covered II


5. WiFi vs. Bluetooth vs. Cellular
   - Why do we have different standards for different applications and use cases?
6. Hands-on DVB (by Alexander Ihlow)
   - How to read a standard?
7. Business Models
   - How to commercialize a standard?
8. The Future of Mobile Communications
   - 6G and beyond
   - Trends and goals
   - Recent research at EMS

2. Preliminaries

Technical Preliminaries

LTI System Model

Channel as Block Model



- System operator $\mathcal{H}$
- Transforms input signal $x(t)$ to output signal $y(t)$

System Operator under LTI Properties

- **L**inear
  - $\mathcal{H}\{\alpha x_1(t) + \beta x_2(t)\} = \alpha\mathcal{H}\{x_1(t)\} + \beta\mathcal{H}\{x_2(t)\}$
  - Superposition principle
- **T**ime **I**nvariant
  - $\mathcal{H}\{x(t-\tau)\} = y(t-\tau)$
  - Time delay τ of input equates to time delay τ of output

Remark: Real channels are inherently dynamic—covered in lecture 2 (coherence time)

Channel Impulse Response (CIR)

Response to an ideal Dirac pulse $\delta(t)$

$$h(t) = \mathcal{H}\{\delta(t)\}$$

LTI Input-Output Relation

Convolution of input $x(t)$ with CIR $h(t)$

$$y(t) = x(t) * h(t)$$

$$y(t) = \int_{-\infty}^{\infty} x(\tau)h(t-\tau)\,\mathrm{d}\tau$$

Fourier Transformation I

From Impulse Response to Transfer Function

- Time-domain CIR $h(t)$ describes channel delay behavior
- Fourier Transform (FT) maps CIR to frequency domain Channel Transfer Function (CTF)
- $h(t) \circ\!\!-\!\!\bullet\, H(f)$

Basis Functions & Eigenfunction Property

- Complex exponentials $\phi_f(t) = \mathrm{e}^{\mathrm{j}2\pi ft}$ serve as orthogonal basis (kernel)
- Exponentials pass through unchanged except for complex scaling
- $\mathcal{H}\{\mathrm{e}^{\mathrm{j}2\pi ft}\} = H(f) \cdot \mathrm{e}^{\mathrm{j}2\pi ft}$
- Complex scalar $H(f)$ gives channel attenuation and phase rotation at frequency f

FT (Analysis)

Decomposition into spectrum

$$H(f) = \int_{-\infty}^{\infty} h(t)\, \mathrm{e}^{-\mathrm{j}2\pi ft}\, \mathrm{d}t$$

Inverse FT (IFT) (Synthesis)

Reconstruction of time signal

$$h(t) = \int_{-\infty}^{\infty} H(f)\, \mathrm{e}^{\mathrm{j}2\pi ft}\, \mathrm{d}f$$

Orthonormality of Complex Exponentials

$$\left\langle \mathrm{e}^{\mathrm{j}2\pi f_1 t}, \mathrm{e}^{\mathrm{j}2\pi f_2 t} \right\rangle = \delta(f_1 - f_2)$$

Fourier Transformation II

Time-Frequency Uncertainty

- Direct consequence of the FT scaling property
- $x(at) \circ\!\!-\!\!\bullet\ \frac{1}{|a|} X\left(\frac{f}{a}\right)$
- Narrow time duration $\implies$ wide spectral occupancy
- Time-limited signals can never be strictly band-limited

Impact on Radio Standards

- Sharp transitions (e.g., rect pulse) cause slow $1/f$ spectral decay
- High sidelobes leak energy thereby causing interference
- Regulatory spectral masks strictly limit out-of-band emissions

Remark: An optimal pulse must balance finite duration and low spectral sidelobes—covered in lecture 2 (root-raised-cosine)

FT Example

$$\mathrm{rect}\left(\tfrac{t}{T}\right) \circ\!\!-\!\!\bullet\ T\,\mathrm{si}(\pi f T)$$

$\mathrm{si}(x) = \frac{\sin(x)}{x}$, zeros at $f = \pm\frac{k}{T}$

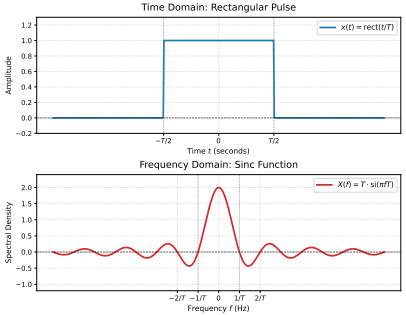


Abb.: Rectangular Pulse and Si Function

Fourier Transformation III

Live demo: Frequency spectrum from the computer microphone

- scripts/section-1/live-spectrogram.py

Fourier Transformation IV

Essential Fourier Properties

- Time Shifting (e.g. Propagation Delay)
  - $x(t-\tau_0) \;\circ\!\!-\!\!\bullet\; X(f)\,\mathrm{e}^{-\mathrm{j}2\pi f\tau_0}$
  - Delay τ_0 introduces a linear phase rotation across frequency
- Frequency Shifting (e.g. Doppler Shift)
  - $x(t)\,\mathrm{e}^{\mathrm{j}2\pi f_\mathrm{D} t} \;\circ\!\!-\!\!\bullet\; X(f-f_\mathrm{D})$
  - Doppler shift f_D introduces linear phase rotation across time
- Convolution Theorem
  - $x(t) * h(t) \;\circ\!\!-\!\!\bullet\; X(f)\cdot H(f)$
  - Simplifies channel equalization from deconvolution to division
- Sampling / Periodicity Duality
  - Periodicity t/f $\Longleftrightarrow$ Sampling f/t

$$\underbrace{x_\mathrm{s}(t) = x(t)\cdot\sum_{n=-\infty}^{\infty}\delta(t-nT_\mathrm{s})}_{\text{Sampling in Time}} \quad \circ\!\!-\!\!\bullet \quad \underbrace{X_\mathrm{s}(f) = \frac{1}{T_\mathrm{s}}\sum_{k=-\infty}^{\infty} X\left(f-\frac{k}{T_\mathrm{s}}\right)}_{\text{Periodification in Frequency}}$$

Complex Baseband I

Why Complex Signals for Real Waves?

- Antennas emit and capture real-valued signals $s_{\mathrm{BP}}(t) \in \mathbb{R}$
- Communications signals usually narrowband ($B \ll f_{\mathrm{c}}$):
  - Carrier f_{c} fixed in the GHz regime (e.g., $3.5\,\mathrm{GHz}$)
  - Information encoded in amplitude $A(t)$ and phase $\phi(t)$
- Simulating carrier oscillations at GHz rates is computationally expensive

Equivalent Complex Baseband Envelope

- Utilize complex numbers to combine amplitude and phase
- $s_{\mathrm{BB}}(t) = A(t)\,\mathrm{e}^{\mathrm{j}\phi(t)} \in \mathbb{C}$
- Describes signal independent of the carrier frequency

Passband Baseband Transformation

Passband as real projection of baseband signal

$$s_{\mathrm{BP}}(t) = \mathrm{Re}\Big\{ s_{\mathrm{BB}}(t)\,\mathrm{e}^{\mathrm{j}2\pi f_{\mathrm{c}} t} \Big\}$$

Advantages

- Spectrum centered around $0\,\mathrm{Hz}$
- Sample rate reduces from $2(f_{\mathrm{c}} + B/2)$ to B
- Clean mathematical framework for modulation and filtering

Complex Baseband II


Cartesian Decomposition of Baseband

- Split complex envelope into real and imaginary parts:
- $s_{\mathrm{BB}}(t) = I(t) + \mathrm{j}Q(t)$
- $I(t) = \mathrm{Re}\{s_{\mathrm{BB}}(t)\} = A(t)\cos\phi(t)$ (**In-Phase**)
- $Q(t) = \mathrm{Im}\{s_{\mathrm{BB}}(t)\} = A(t)\sin\phi(t)$ (**Quadrature**)

Orthogonal Carrier Modulation

- Expanding $s_{BP}(t)$ with Euler's identity
- $\mathrm{e}^{\mathrm{j}2\pi f_c t} = \cos\omega_c t + \mathrm{j}\sin\omega_c t$
- $s_{\mathrm{BP}}(t) = I(t)\cos(2\pi f_c t) - Q(t)\sin(2\pi f_c t)$
- Transmits two independent data streams over the same RF spectrum

I/Q Modulator Architecture



Why do we have Digital Communication Systems?

Disadvantages of Analog Systems

- Requires two physical signal traces for I and Q
- Analog hardware impairments

Advantages of Digital Systems

- Complex numbers handled in memory/software
- Flexibility of the hardware platforms (Software-defined radio)
- Conditional access and encryption
- Error correction and information compression
- Storage of digital data

Discrete Fourier Transformation I

Discrete Counterpart of the FT

- Discrete Fourier Transformation (DFT) maps N discrete time samples to N discrete frequency bins
- DFT kernel from FT kernel
- $\mathrm{e}^{-\mathrm{j}2\pi ft} \quad \longrightarrow \quad \mathrm{e}^{-\mathrm{j}\frac{2\pi}{N}kn} = W_N^{kn}$
- Discrete complex exponentials $\phi_k[n] = \mathrm{e}^{\mathrm{j}\frac{2\pi kn}{N}}$ serve as orthogonal basis

Intrinsic Periodicity of the DFT

- Discrete harmonic basis is N-periodic
- $W_N^{(k+N)n} = W_N^{kn} \implies X[k+N] = X[k]$
- Time sequence implicitly treated as periodic
- $\tilde{x}[n] = x[n \bmod N]$

N-Point DFT (Analysis)

Time sequence to discrete frequency

$$X[k] = \sum_{n=0}^{N-1} x[n]\, \mathrm{e}^{-\mathrm{j}\frac{2\pi}{N}kn}$$
$$k \in \{0, 1, \ldots, N-1\}$$

N-Point IDFT (Synthesis)

Reconstruction of time samples

$$x[n] = \tfrac{1}{N} \sum_{k=0}^{N-1} X[k]\, \mathrm{e}^{\mathrm{j}\frac{2\pi}{N}kn}$$
$$n \in \{0, 1, \ldots, N-1\}$$

Orthogonality of Discrete Complex Exponentials

$$\left\langle \mathrm{e}^{\mathrm{j}\frac{2\pi kn}{N}}, \mathrm{e}^{\mathrm{j}\frac{2\pi mn}{N}} \right\rangle = \begin{cases} N, & k = m \\ 0, & k \neq m \end{cases}$$

Discrete Fourier Transformation II

- Time Shifting
  - Compare to FT (Slide 2.7)
  - $x\left[(n - n_0) \bmod N\right] = X[k]\, e^{-j\frac{2\pi}{N}kn_0}$
- Frequency Shifting
  - Compare to FT (Slide 2.7)
  - $X\left[(k - k_0) \bmod N\right] = x[n]\, e^{j\frac{2\pi}{N}k_0 n}$
- Convolution Discrepancy Compared to FT
  - Discrete LTI channels perform linear convolution
  - $y[n] = x[n] * h[n] = \sum_m h[m]x[n-m]$
  - Multiplying two DFTs yields circular convolution ($\circledast_N$)
  - $x[n] \circledast_N h[n] \circ\!\!-\!\!\bullet\, X[k] \cdot H[k]$

Circular Convolution $\circledast_N$

$$x[n] \circledast_N h[n] = \sum_{m=0}^{N-1} h[m]\, x[(n-m) \bmod N]$$

Discrete Fourier Transformation III

DFT is a linear transformation

- N-point DFT acts as matrix-vector product:

$$\mathbf{X} = \mathbf{F}_N \mathbf{x}$$

- $\mathbf{x} = [x[0], \ldots, x[N-1]]^T \in \mathbb{C}^N$
- $\mathbf{X} = [X[0], \ldots, X[N-1]]^T \in \mathbb{C}^N$
- $\mathbf{F}_N$ is a symmetric matrix with entries $[\mathbf{F}_N]_{k,n} = W_N^{k \cdot n}$

Orthogonality & IDFT

- Columns of $\mathbf{F}_N$ form an orthogonal basis:

$$\mathbf{F}_N^H \mathbf{F}_N = N\mathbf{I}_N \implies \mathbf{F}_N^{-1} = \frac{1}{N}\mathbf{F}_N^H$$

- IDFT matrix is conjugate transpose $\mathbf{F}_N^H$ scaled by $1/N$

The DFT Matrix $\mathbf{F}_N$

$$\mathbf{F}_N = \begin{bmatrix} 1 & 1 & 1 & \ldots & 1 \\ 1 & W_N^1 & W_N^2 & \ldots & W_N^{N-1} \\ 1 & W_N^2 & W_N^4 & \ldots & W_N^{2(N-1)} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 1 & W_N^{N-1} & W_N^{2(N-1)} & \ldots & W_N^{(N-1)^2} \end{bmatrix}$$

- With $W_N = \mathrm{e}^{-\mathrm{j}\frac{2\pi}{N}}$

Spatial Processing I

- Plane wave = oscillation across distance and time
- Wave number k_0 = spatial phase velocity per meter $(\mathrm{rad/m})$
- Wave vector k = directional vector pointing along direction of propagation θ
- Spatial sampling = antenna elements sample positions as ADCs sample time
- Time–frequency duality maps to space–angle

Wave Basics

- Wave propagation along time and frequency
- $s(\mathbf{r}, t) = \mathrm{e}^{\mathrm{j}(\omega t - \mathbf{k}\cdot\mathbf{r})}$
- Spatial frequency vector
- $k_0 = \frac{2\pi}{\lambda}$


Time–Space Duality

Time Domain	**Spatial Domain**
Time t	Position x
Period T_s	Element Spacing d
Freq. ω	Wavenumber k_0
$f_\mathrm{s} \geq 2B$	$d \leq \lambda/2$

Spatial Processing II

Uniform Linear Array (ULA)

- Plane wave arriving from angle θ
- Wave travels extra Δl per element
- Elements experience angle-dependent phase shift ψ compared to reference element 0
- Array steering vector $\mathbf{a}(\theta)$
- $\mathbf{a}(\theta) = \begin{bmatrix} 1 & \mathrm{e}^{-\mathrm{j}\psi} & \dots & \mathrm{e}^{-\mathrm{j}(M-1)\psi} \end{bmatrix}^T$
- Spatial sampling without ambiguities if $d \leq \frac{\lambda}{2} \iff |\psi| \leq \pi$

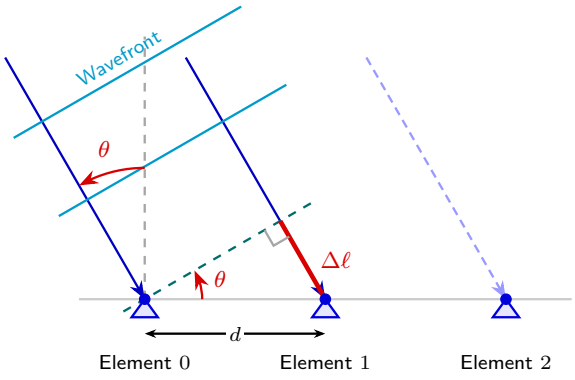


Path difference: $\Delta\ell = d \sin\theta$

Phase shift: $\psi = \frac{2\pi}{\lambda}\Delta\ell = \frac{2\pi d}{\lambda}\sin\theta$

Spatial Processing III

Bartlett Beamformer

- Weight vector $\mathbf{w}(\theta)$ "steers" antenna array
- Maximizes output power for direction θ by selecting weights as
- $\mathbf{w}_{\text{Bartlett}}(\theta) = \frac{1}{M}\mathbf{a}(\theta)$
- Undo the phase shifts introduced by the channel
- Scan output power of the beamformer across θ
- $P_{\text{BF}}(\theta) = \mathbf{w}^H(\theta)\,\mathbf{R}_{xx}\,\mathbf{w}(\theta)$

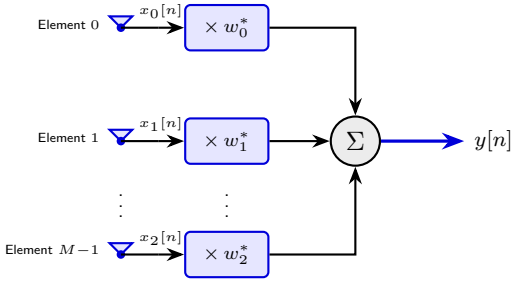

Output Signal Model

- Snapshot vector: $\mathbf{x}[n] = \mathbf{a}(\theta_0)s[n] + \mathbf{n}[n]$
- Beamformer output: $y[n] = \mathbf{w}^H(\theta)\mathbf{x}[n]$
- Spatial covariance: $\mathbf{R}_{xx} = \mathbb{E}\{\mathbf{x}[n]\mathbf{x}^H[n]\}$

Spatial Processing IV

Live demo: Bartlett beamformer visualization

- scripts/section-1/bartlett.py
- scripts/section-1/bartlett-multi-doa.py

Standardization Preliminaries

Radio Spectrum

What is the Radio Spectrum?

- Part of electromagnetic spectrum from $3\,\mathrm{Hz}$ to $3\,\mathrm{THz}$
- Finite natural resource used for wireless communication
- Backbone of modern telecommunication and broadcasting

Spectrum Allocation

- Globally coordinated by International Telecommunication Union (ITU)
- Divided into frequency bands assigned to specific services (TV, radio, mobile, satellite, radar, amateur)

Frequency vs. Wavelength

- Connection between frequency f and wavelength λ
- $c = \lambda \cdot f$
- $c = 299\,792\,458\,\mathrm{m\,s^{-1}}$ (in vacuum)

Rules-of-Thumb

- $1\,\mathrm{GHz} \rightarrow 30\,\mathrm{cm}$
- $3\,\mathrm{GHz} \rightarrow 10\,\mathrm{cm}$
- $10\,\mathrm{GHz} \rightarrow 3\,\mathrm{cm}$

Radio Spectrum by ITU

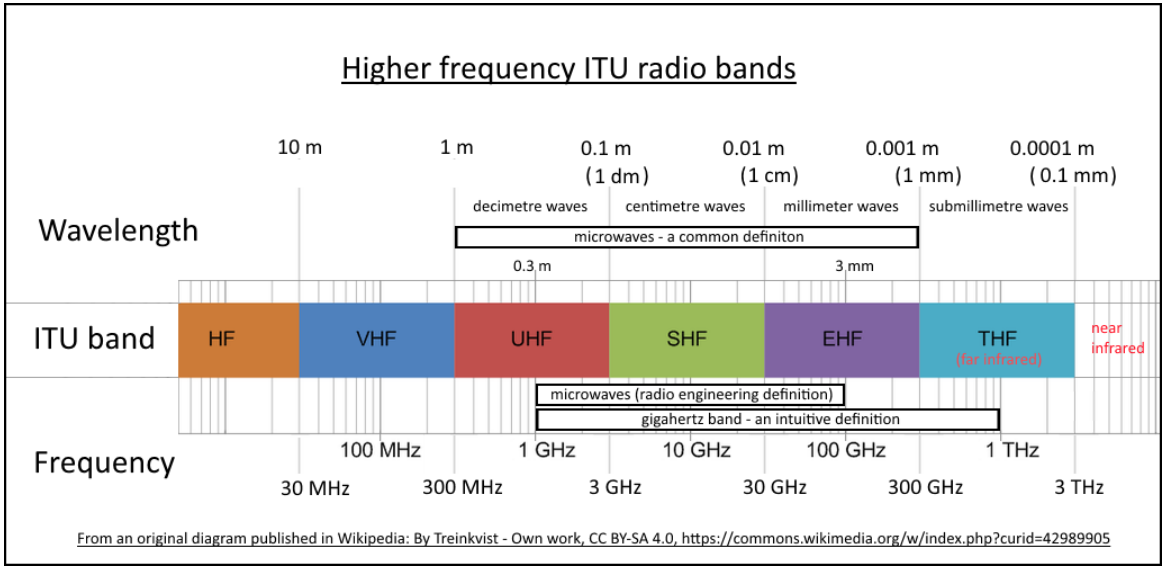


Abb.: Radio Spectrum and ITU Frequency Bands

Radio Spectrum Usage USA

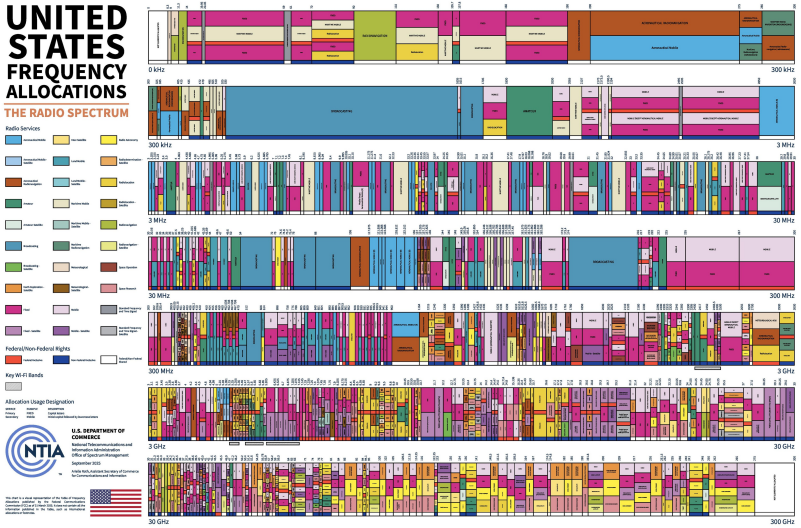


Abb.: Radio Spectrum Usage in USA

Radio Spectrum Usage USA

show some example occupations in the US spectrum ADD Refs to external figures!!!

ITU

The United Nations Specialty Agency for Information and Communications Technology

- Founded in 1865 as the International Telegraph Union
- Renamed in 1947 to International Telecommunication Union
- Coordinates global use of the radio spectrum
- In total 194 member states
- Each member state has equal represenation and voting rights on e.g. standards

ITU's three sectors

- **ITU-R** (Radio): Radio spectrum management, satellite coordination
- **ITU-T** (Telecommunication): Technical standards (Recommendations)
- **ITU-D** (Development): Digital development in member states

Standards

What is a standard? A documented agreement establishing rules, specifications, and characteristics for activities and their results.

- Ensures products and services are fit for purpose, safe, and reliable
- Promotes interoperability between equipment and systems
- Facilitates international trade by harmonizing requirements
- Reduces costs by eliminating technical barriers
- Not legally binding—adopted by mutual consensus

Key characteristics of standards

- **Consensus-based**—agreed by all parties
- **Documented**—published and accessible
- **Voluntary**—adoption is typically optional
- **Continuously updated**—revised as technology evolves

Standardization Bodies

Organizations that develop, approve, and publish standards

- **International bodies**—coordinate global standards (ISO, IEC, ITU, IEEE)
- **Regional bodies**—cover large geographic areas (CEN, ETSI)
- **National bodies**—represent each country (DIN, ANSI, BSI)
- **Industry consortia**—specific sectors (3GPP, Wi-Fi Alliance)

Standardization process:

- Propose new topic or revision
- Form working group of experts
- Draft, review, and refine the specification
- Achieve consensus and publish
- Maintain and periodically review/update

Hierarchy of standardization

International $\downarrow$ Regional $\downarrow$ National $\downarrow$ Industry/Company

Standardization Bodies Examples

IEEE (Institute of Electrical and Electronics Engineers)

- Global professional association
- Develops technical standards for electronics and computing
- Key standards: IEEE 802.11 (Wi-Fi), 802.3 (Ethernet), 754 (floating-point)

ISO (International Organization for Standardization)

- Network of national standards bodies
- Develops international standards across all industries
- Well-known: ISO 9001 (quality), ISO 27001 (security), ISO/IEC 14443 (RFID/NFC)

DIN (Deutsches Institut für Normung)

- German national standards body
- Representative for ISO/IEC
- Examples: DIN A4 paper, DIN 7258 (screws)

3GPP (3rd Generation Partnership Project)

- Collaboration of telecommunications standards organizations
- Develops specifications for mobile networks (3G, 4G, 5G, 6G)

Patents

What is a patent? An exclusive right granted for an invention.

- Protects new technical solutions, products, or processes
- Grants the patent holder monopoly for up to 20 years
- Prevents others from making, using, or selling the invention
- In exchange, inventor publicly discloses the invention

Three requirements for patentability

- **Novelty:** New worldwide, not previously disclosed
- **Inventive step:** Not obvious to skilled person
- **Industrial application:** Can be made or used

Patent process (simplified)

1. File application with patent office
2. Formal examination (completeness)
3. Search for prior art
4. Substantive examination (novelty, inventiveness, applicability)
5. Grant or rejection
6. Maintain with annual renewal fees

Standard-essential patents (SEPs)

Patents essential to implementing a standard, must be licensed on **FRAND** terms (fair, reasonable, non-discriminatory)