



A

Power Indicator LEDs




B

Test Points

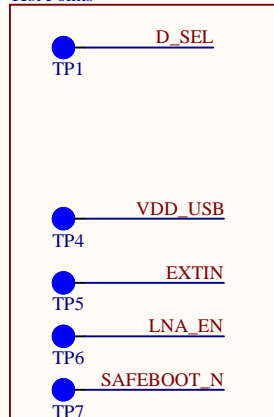


C

Optional: SPI & I2C Interface




D

Optional: Interface Selection



NEO-M8N

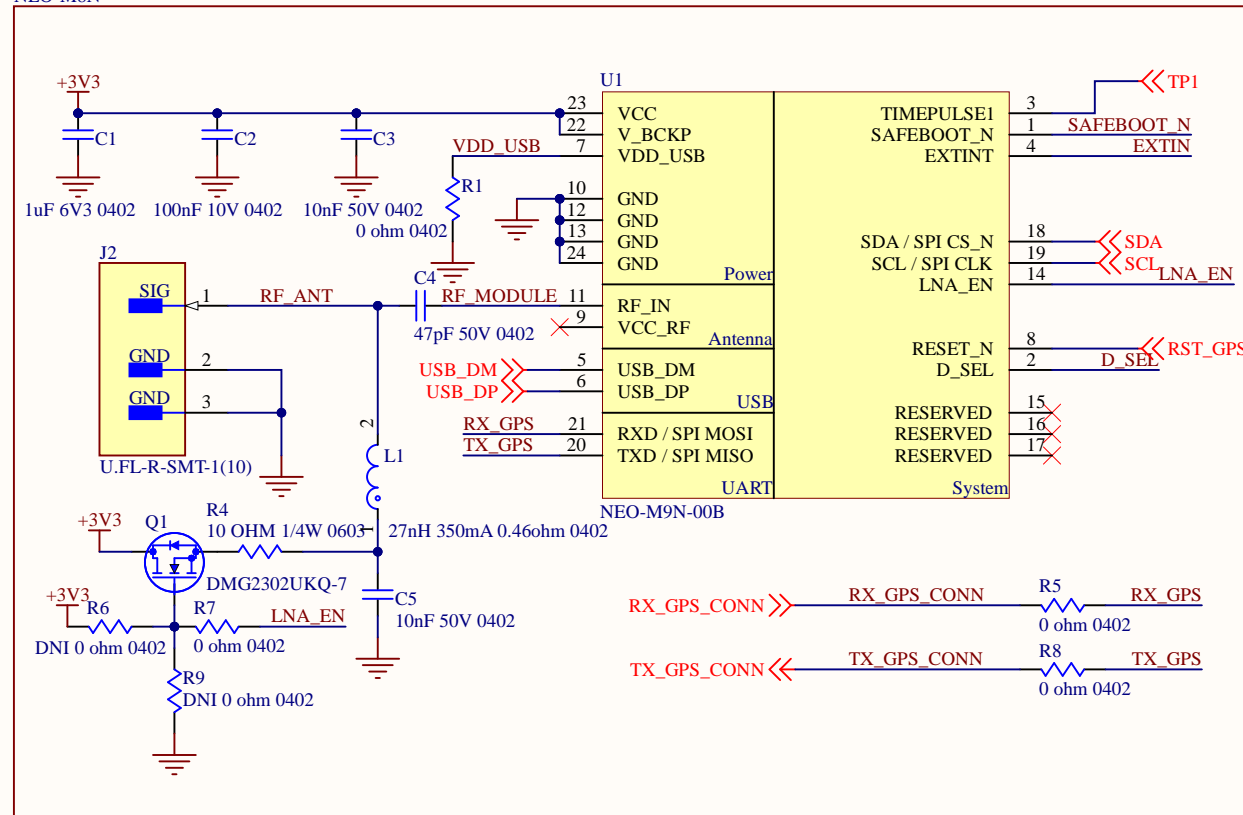

A

B

C

D


Default Interface Selection (left open):


PIN 20: UART TX
 PIN 21: UART RX
 PIN 19: DDC SCL
 PIN 18: DDC SDA

IF D_SEL pulled LOW:
 PIN 20: SPI MISO
 PIN 21: SPI MOSI
 PIN 19: SPI CLK
 PIN 18: SPI CS_N

LNA_EN

HIGH = ACTIVE ANTENNA ON
 LOW = ACTIVE ANTENNA OFF



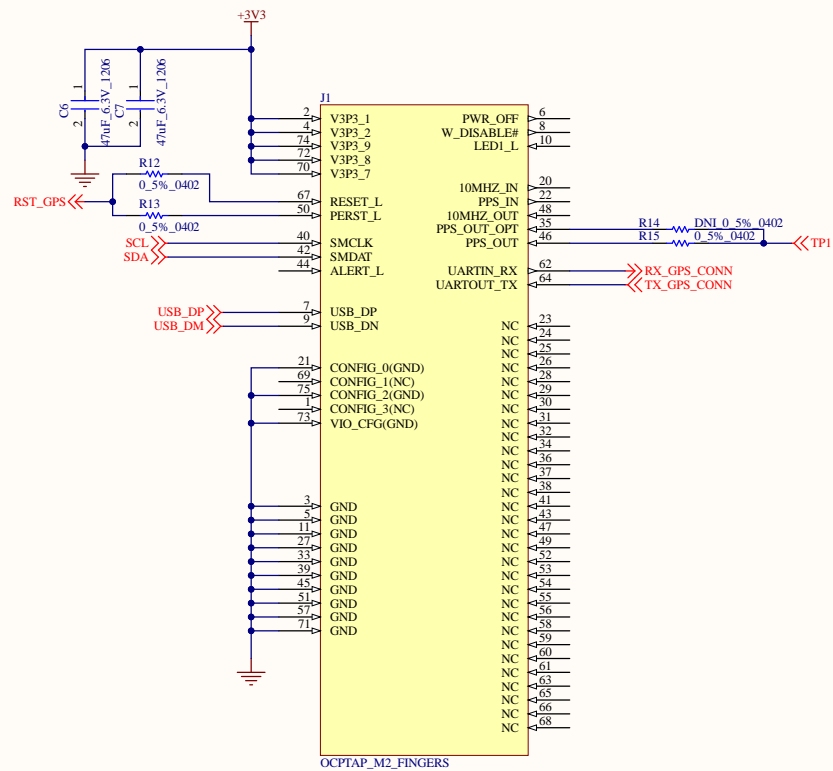

Title		
Size B	Number	Revision
Date:	7/01/2023	Sheet of
File:	C:\Users\...\02-M2_GoldFingers.SchDoc	Drawn By: