


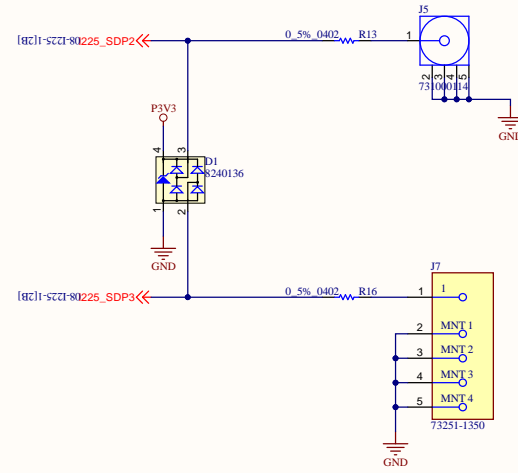
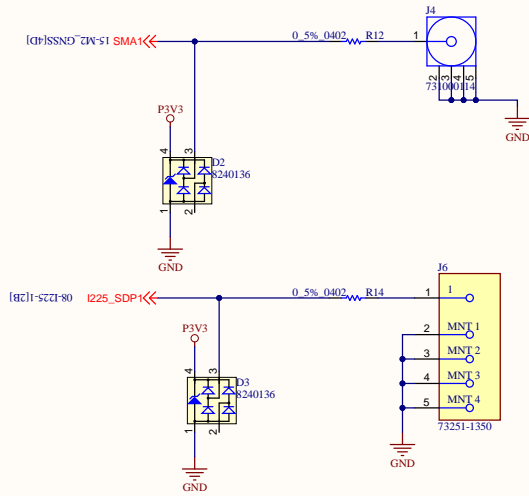
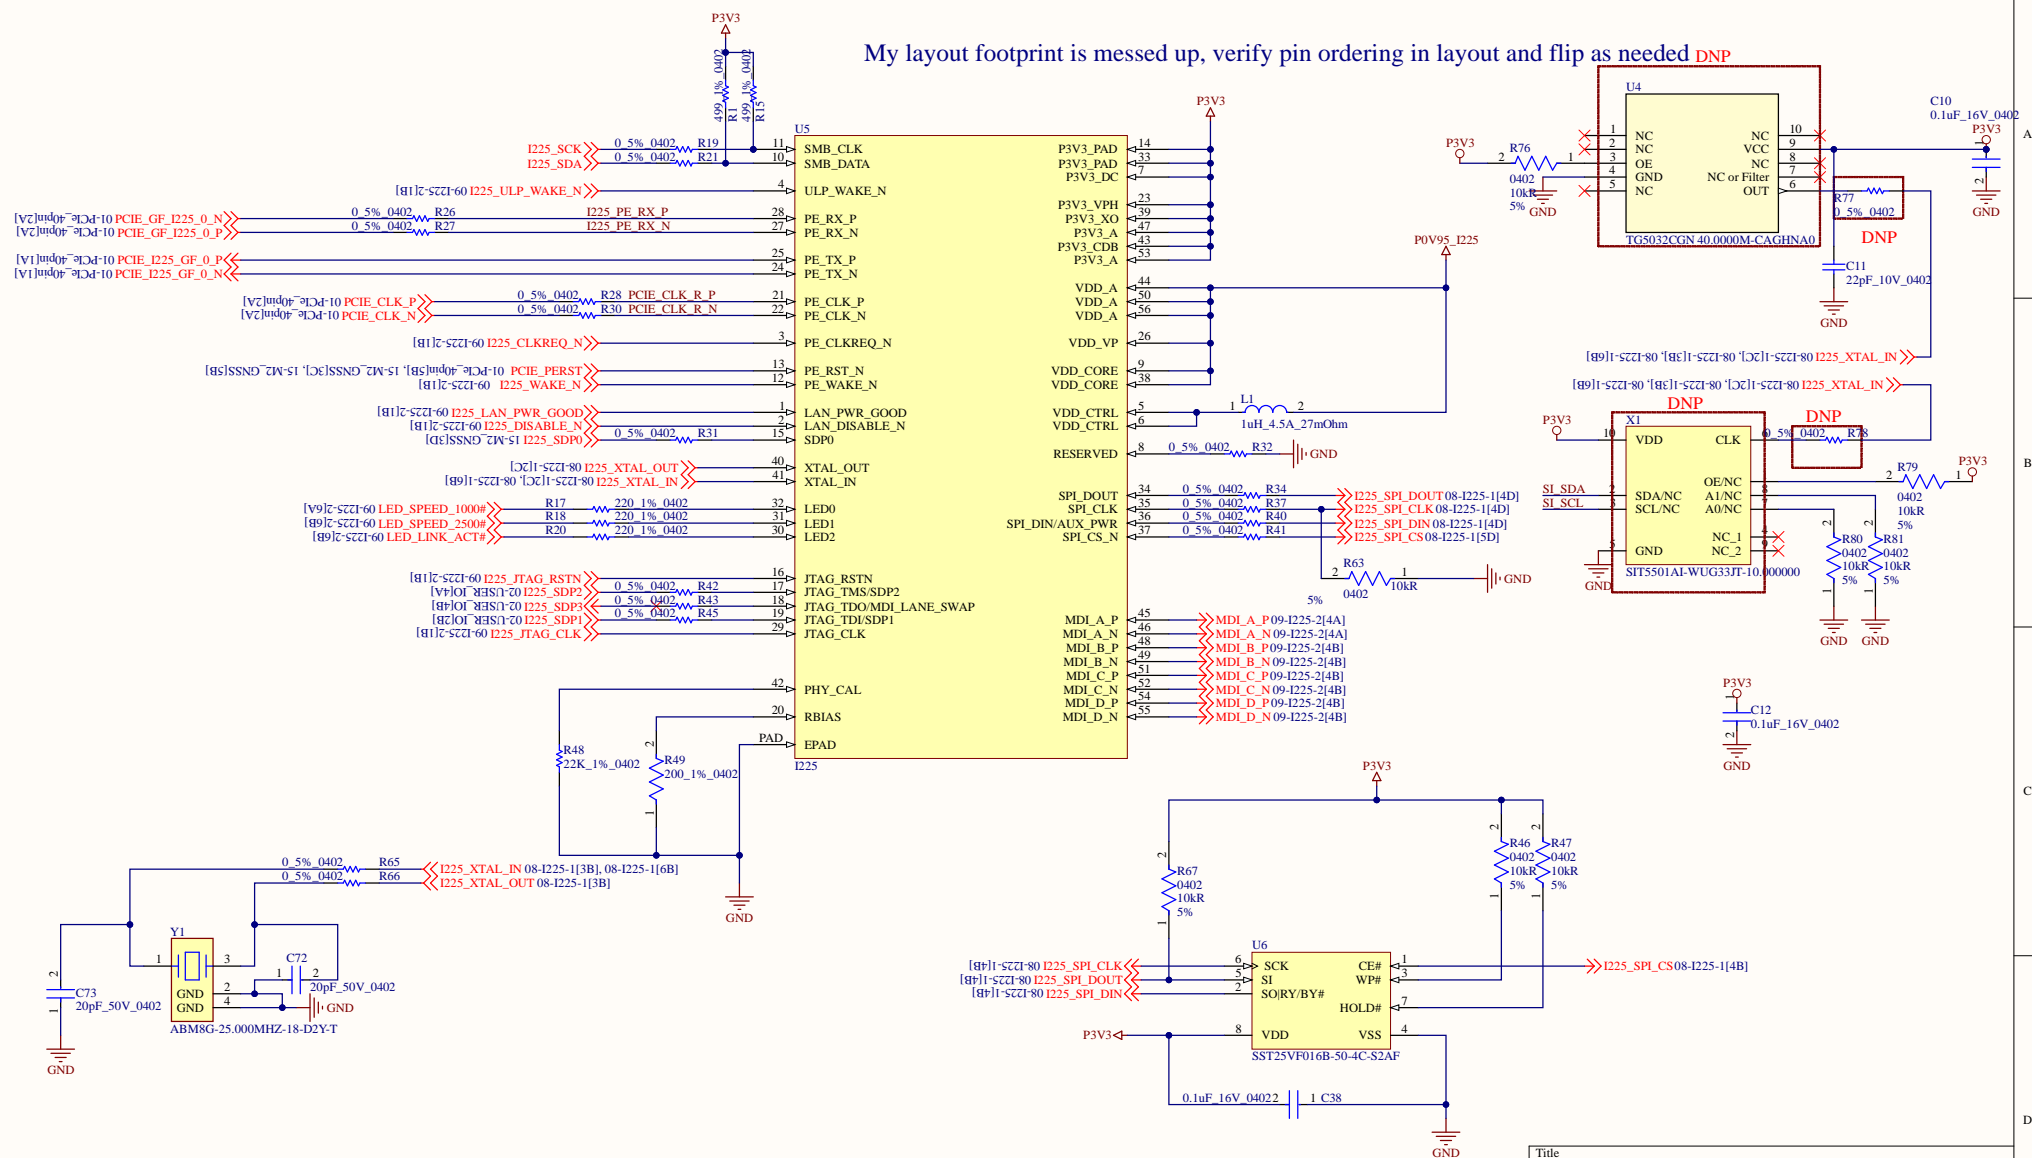


# INPUT/OUTPUT SMA




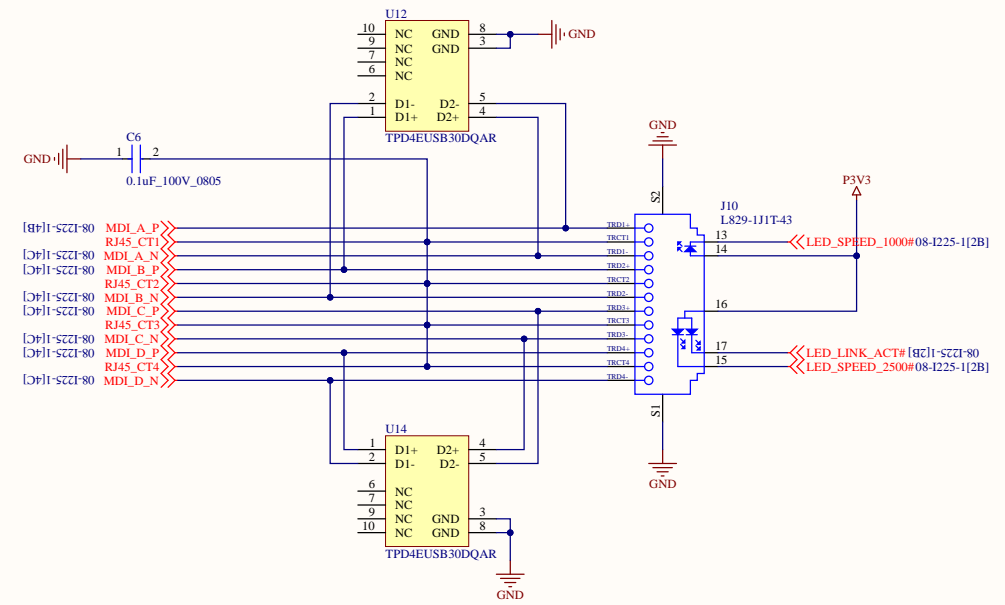


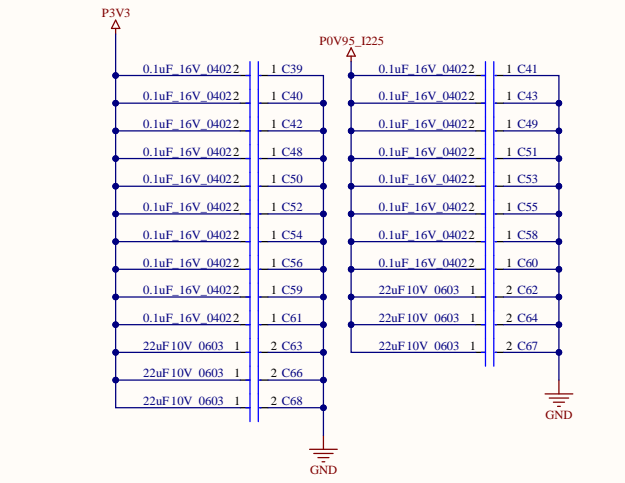

Title		
Size B	Number	Revision
Date:	2/12/2024	Sheet of
File:	\\...08-1225-1.SchDoc	Drawn By:

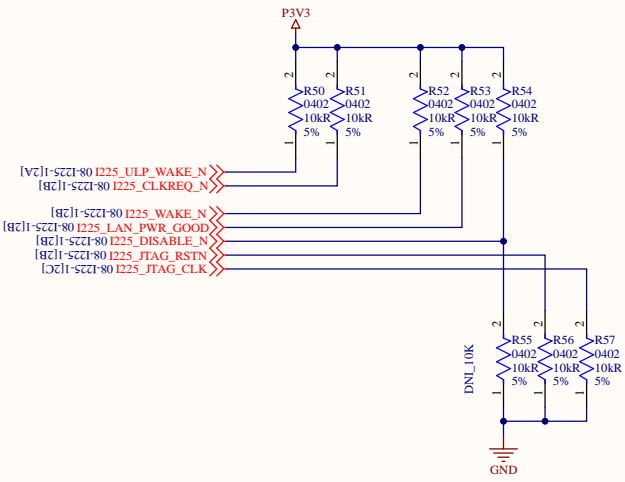


Title		
Size	Number	Revision
B		
Date:	2/12/2024	Sheet of
File:	\\_09-1225-2.SchDoc	Drawn By:

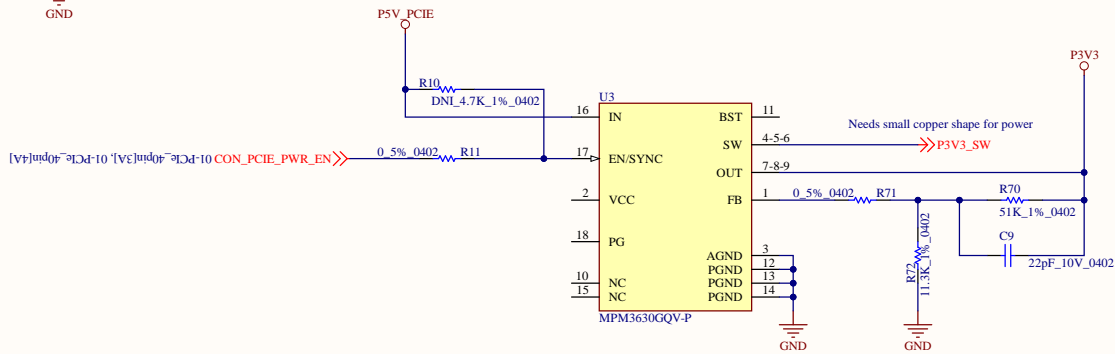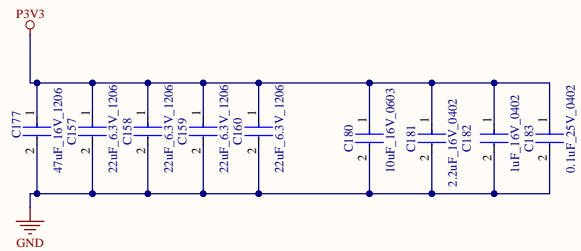


Title		
Size	Number	Revision
B		
Date:	2/12/2024	Sheet of
File:	\\_13-Power-P3V3.SchDoc	Drawn By:

Socket 2 Key B PCIe-based WWAN Adapter Pinout , table 3-21 in M.2 spec

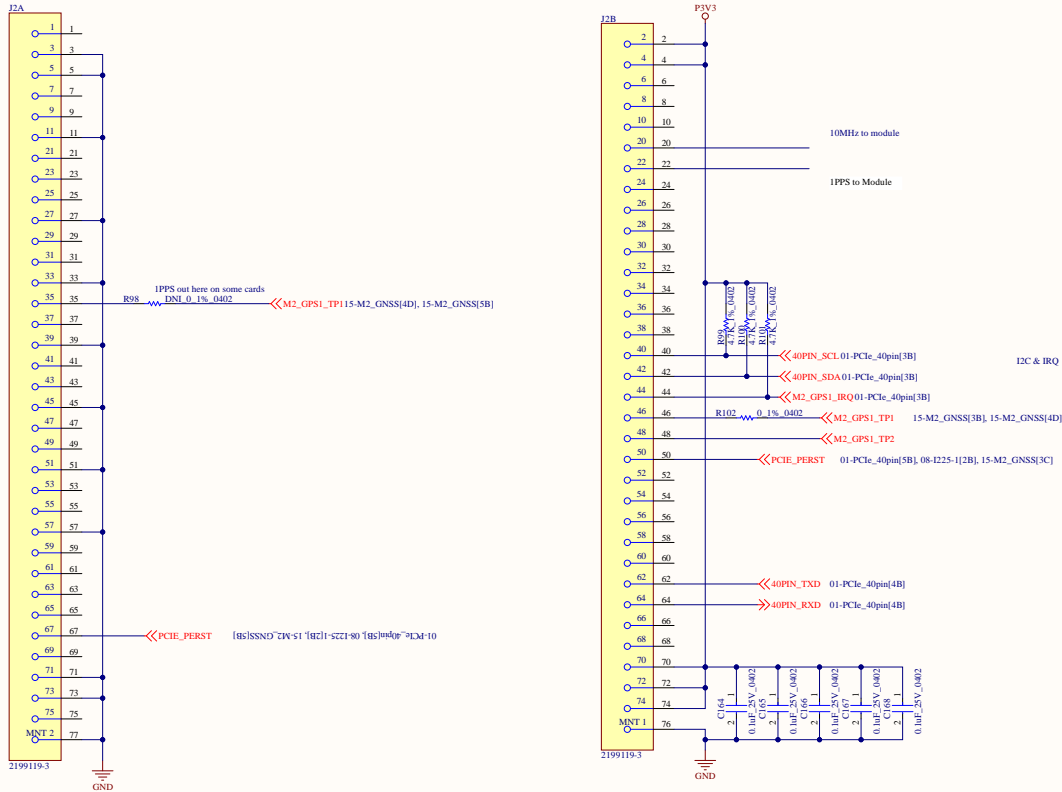

On board option, SDP0 to SMA (GPS\_SEL=1) or to M2 GPS (GPS\_SEL=0), default SMA

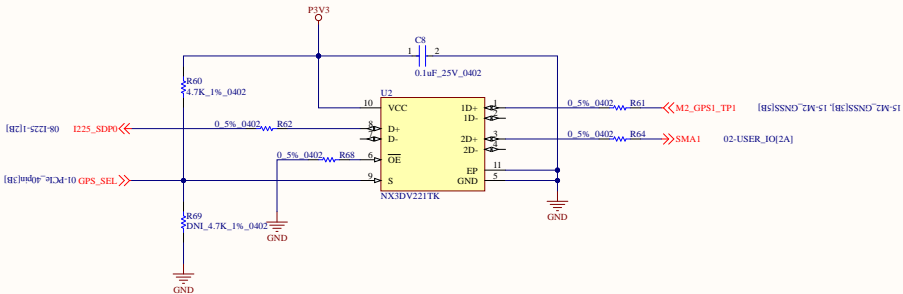

Title		
Size	Number	Revision
C		
Date:	2/12/2024	Sheet of
File:	\\15-M2_GNSS_SchDoc	Drawn By: