




# Power Indicator LEDs




# Test Points

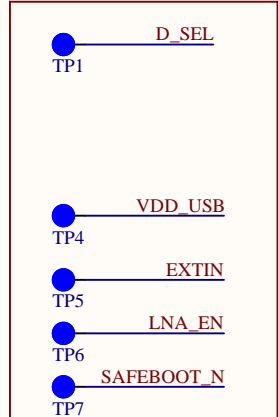


# Optional: SPI & I2C Interface



# Optional: Interface Selection




# NEO-M8N

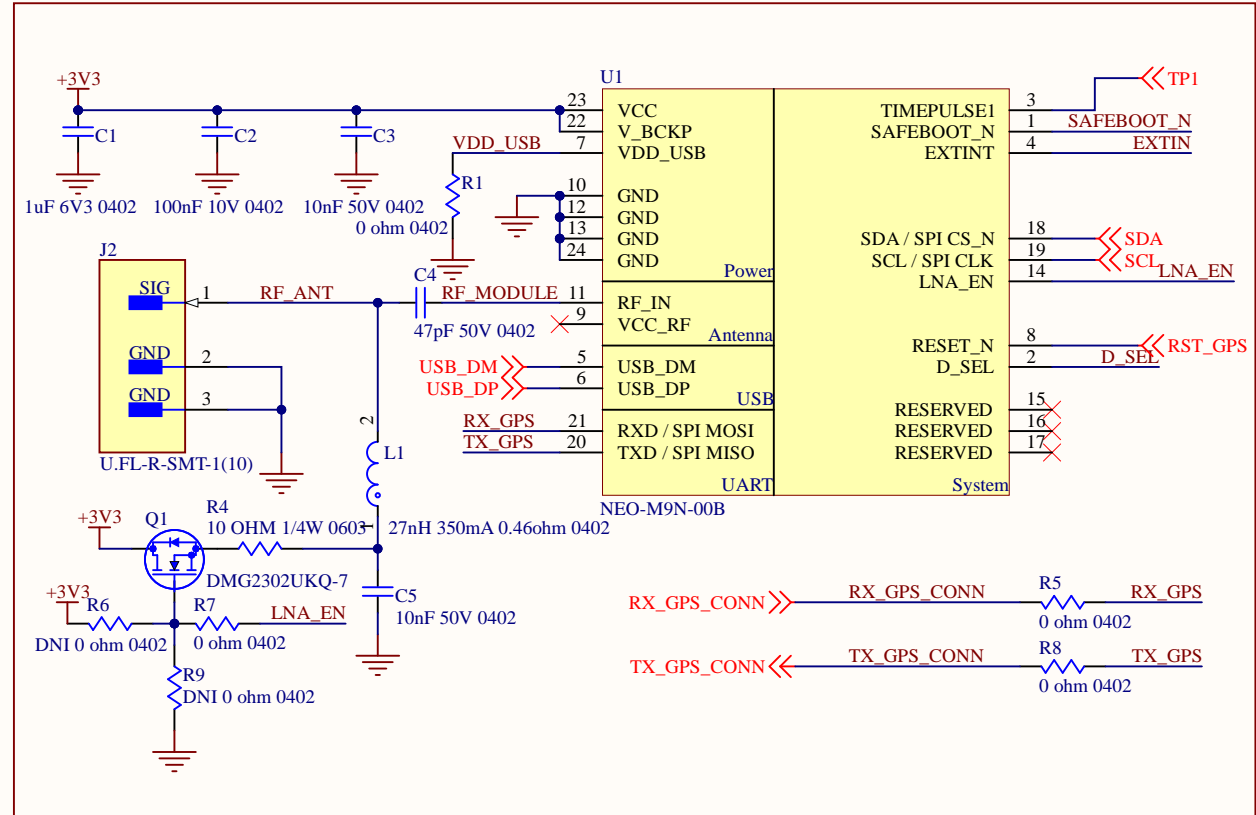


LNA\_EN  
HIGH = ACTIVE ANTENNA ON  
LOW = ACTIVE ANTENNA OFF

Default Interface Selection (left open):  
PIN 20: UART TX  
PIN 21: UART RX  
PIN 19: DDC SCL  
PIN 18: DDC SDA

IF D\_SEL pulled LOW:  
PIN 20: SPI MISO  
PIN 21: SPI MOSI  
PIN 19: SPI CLK  
PIN 18: SPI CS\_N



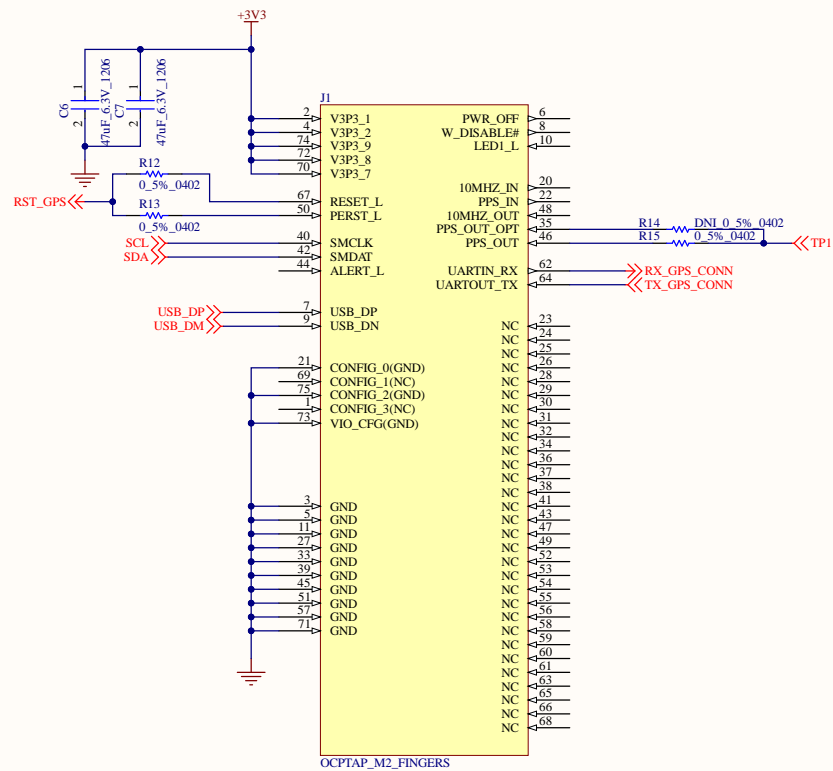

Title		
Size B	Number	Revision
Date:	5/19/2023	Sheet of
File:	C:\Users\...\02-M2_GoldFingers.SchDoc	Drawn By: