



# INPUT/OUTPUT SMA

Using USB MUX To select Input vs Output, cheap, lots of options, low prop delay


BOM Option to connect I225 directly  
Also BOM options for how DPPLL connects to I225 SDP0 and SDP1

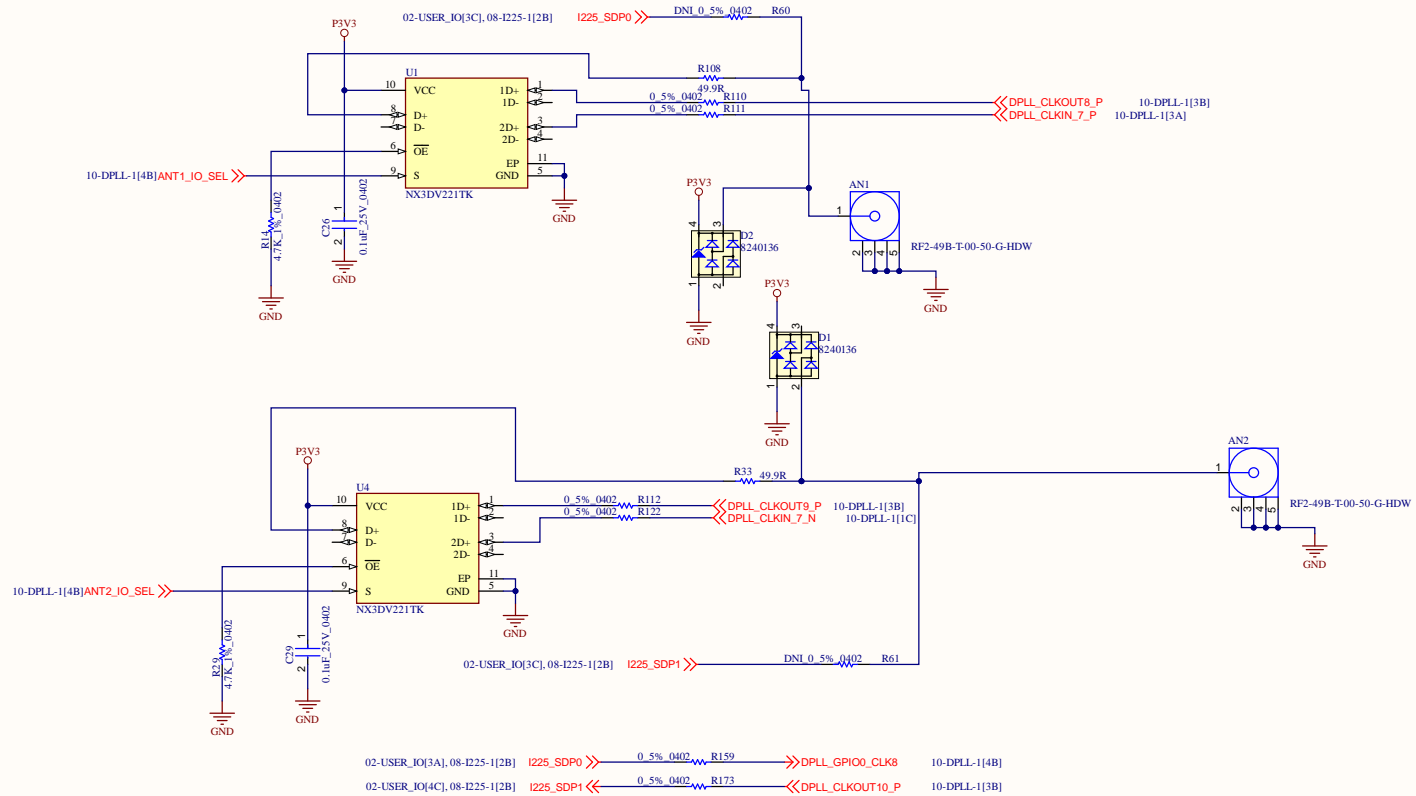


# SYSTEM STATUS LEDS

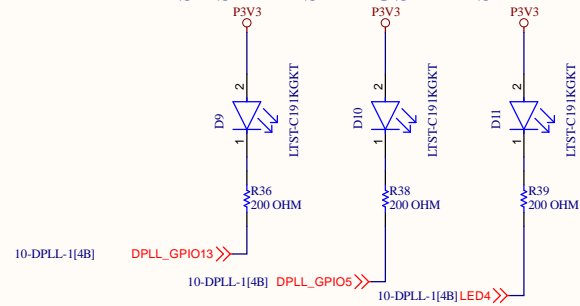


Title		
Size B	Number	Revision
Date:	4/24/2024	Sheet of
File:	C:\Users\103-USER\IO_STATUS.Sch	Drawn By:






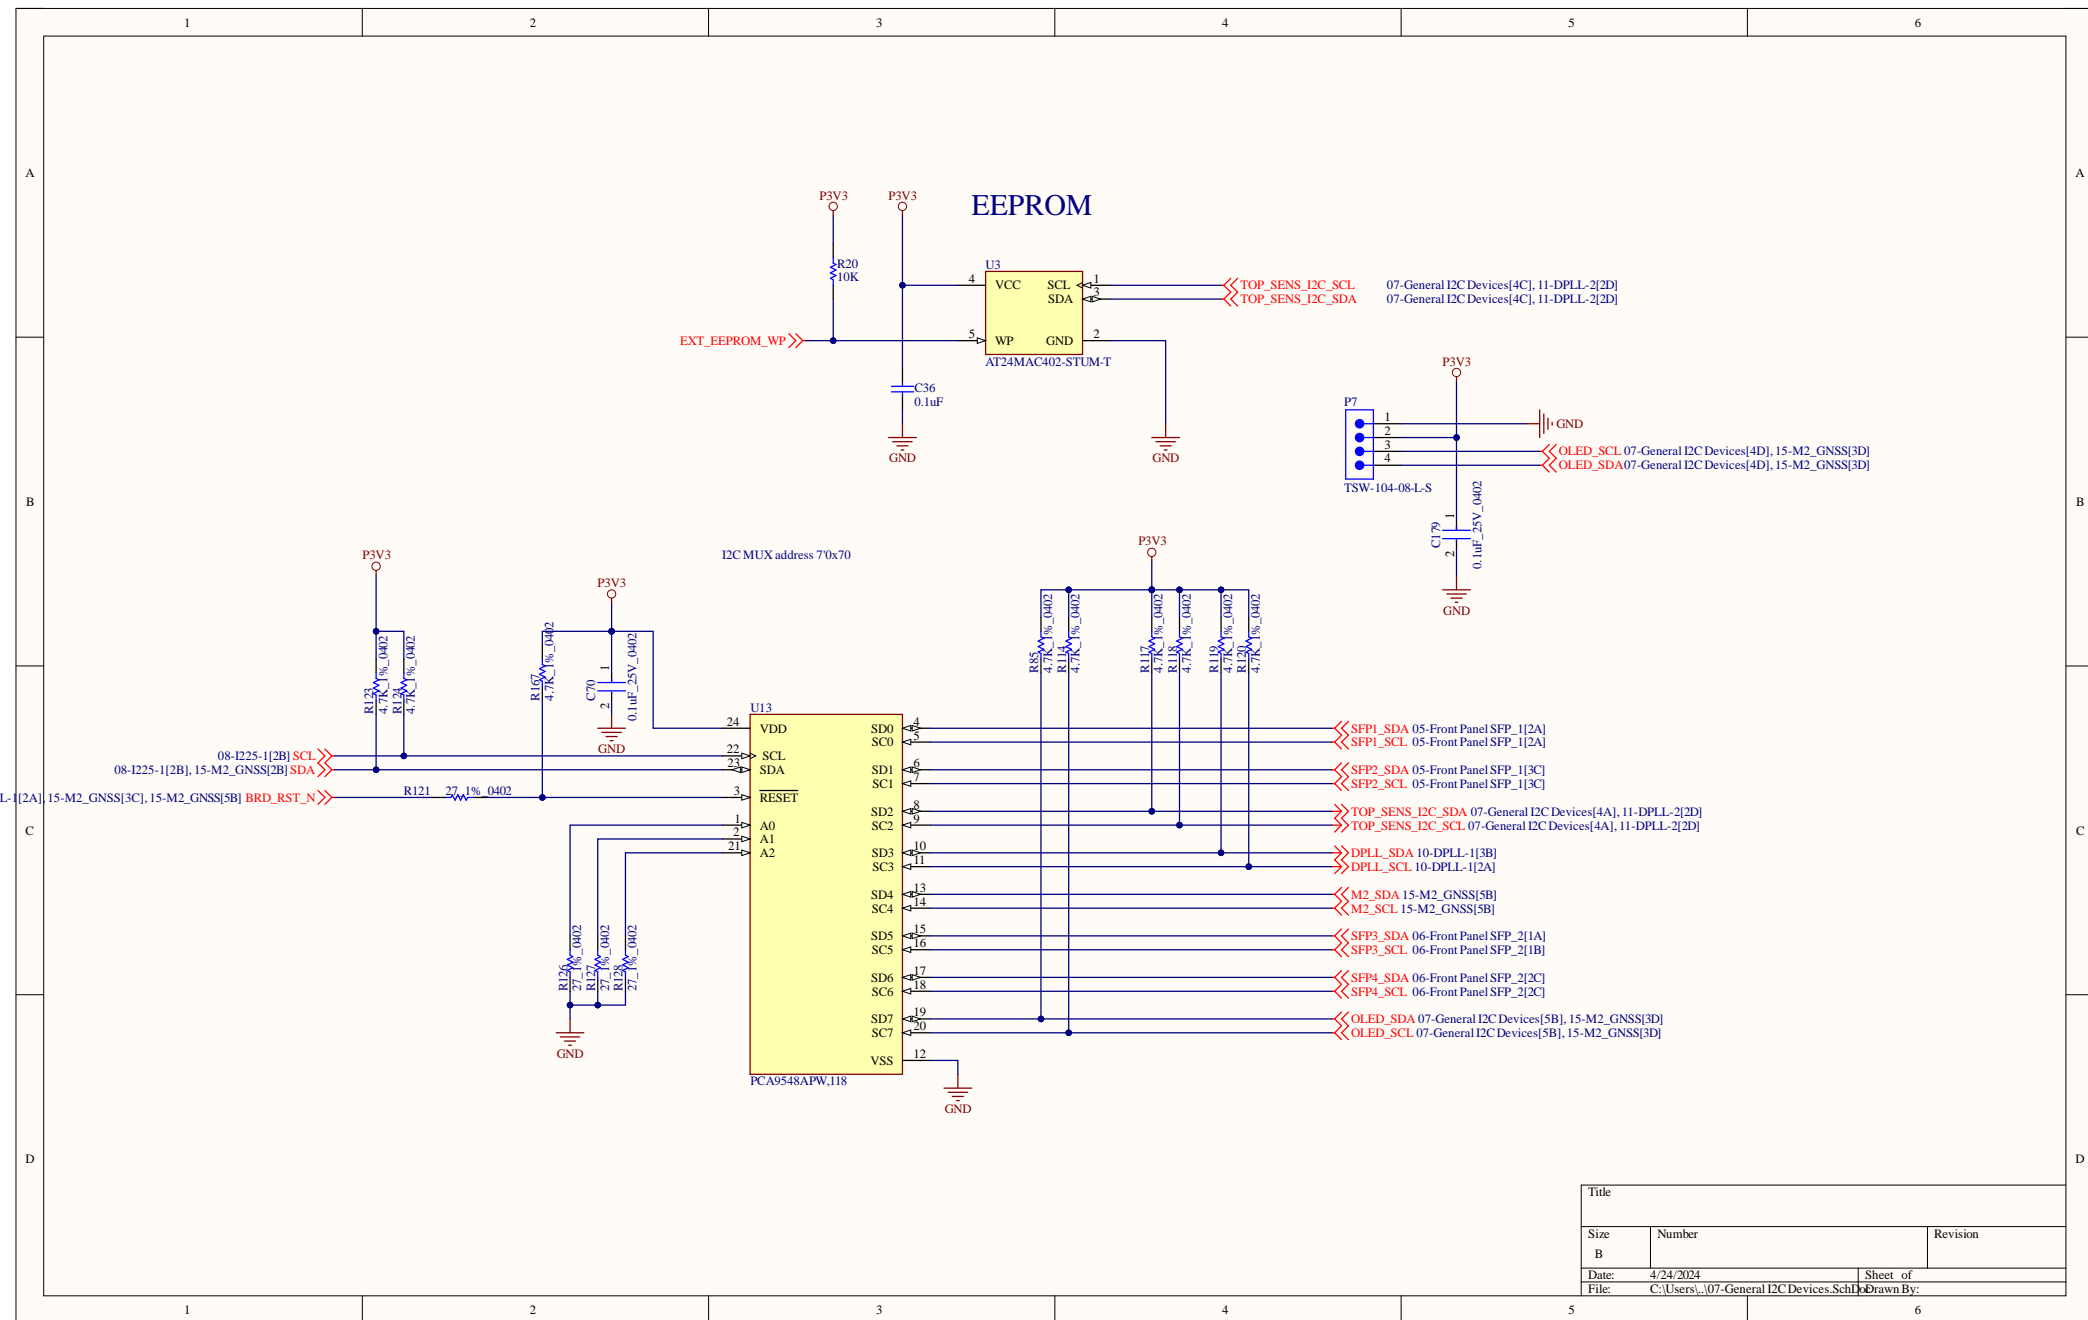


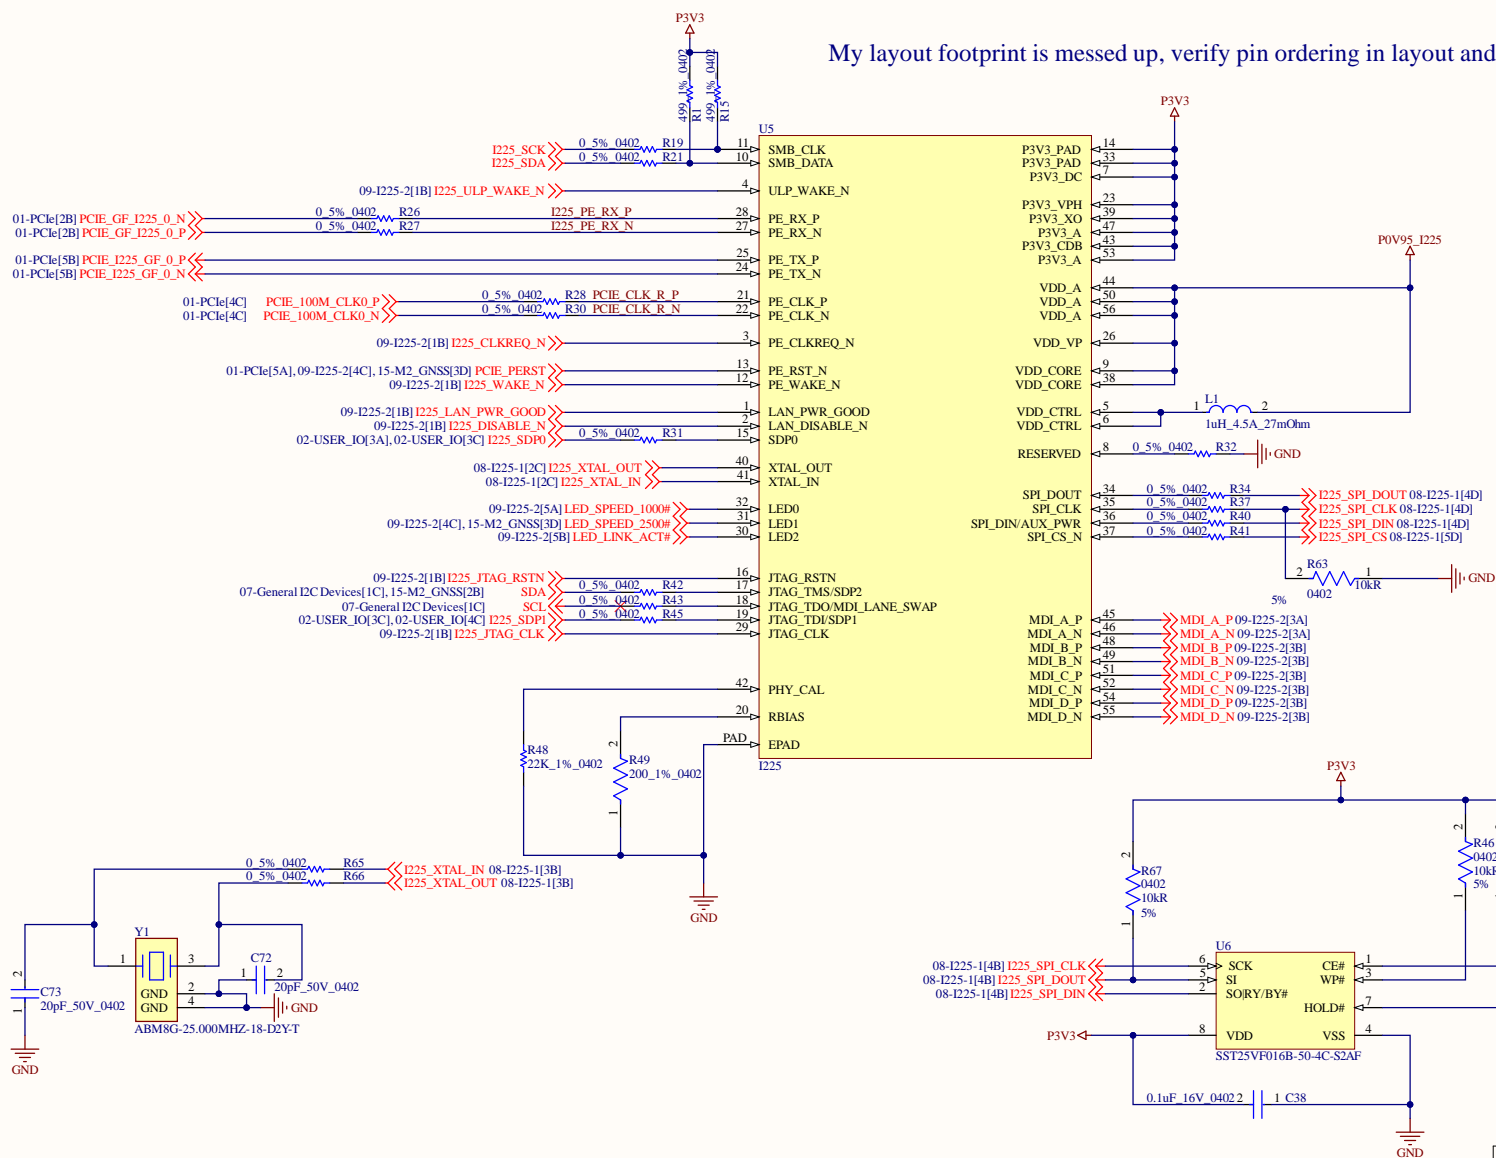



Title			
Size B	Number		Revision
Date:	4/24/2024	Sheet of	
File:	C:\Users\j\08-1225-1.SchDoc	Drawn By:	

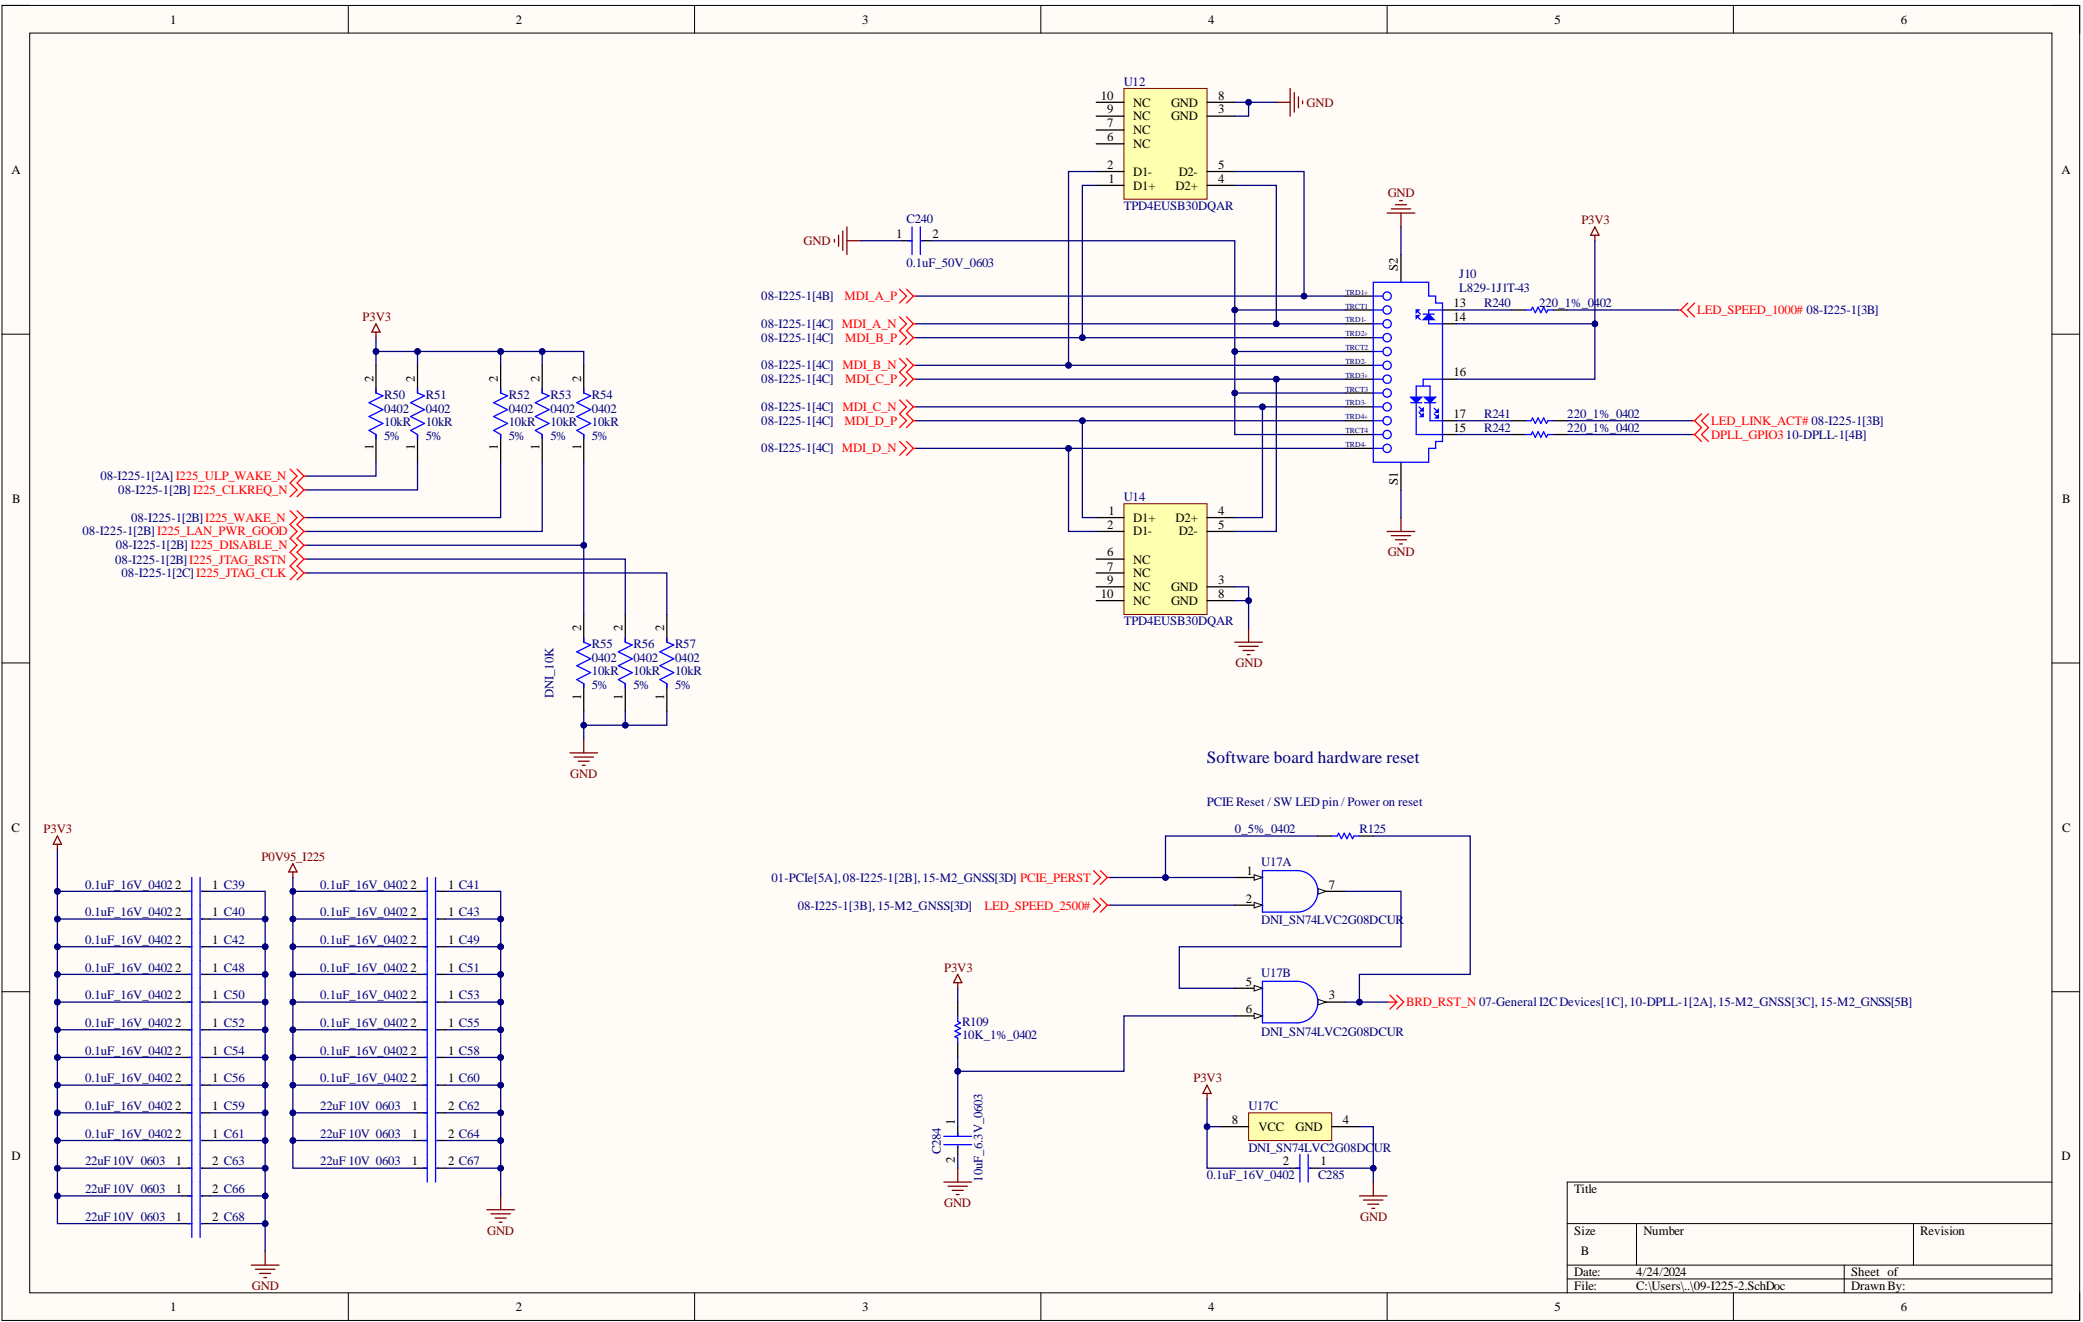




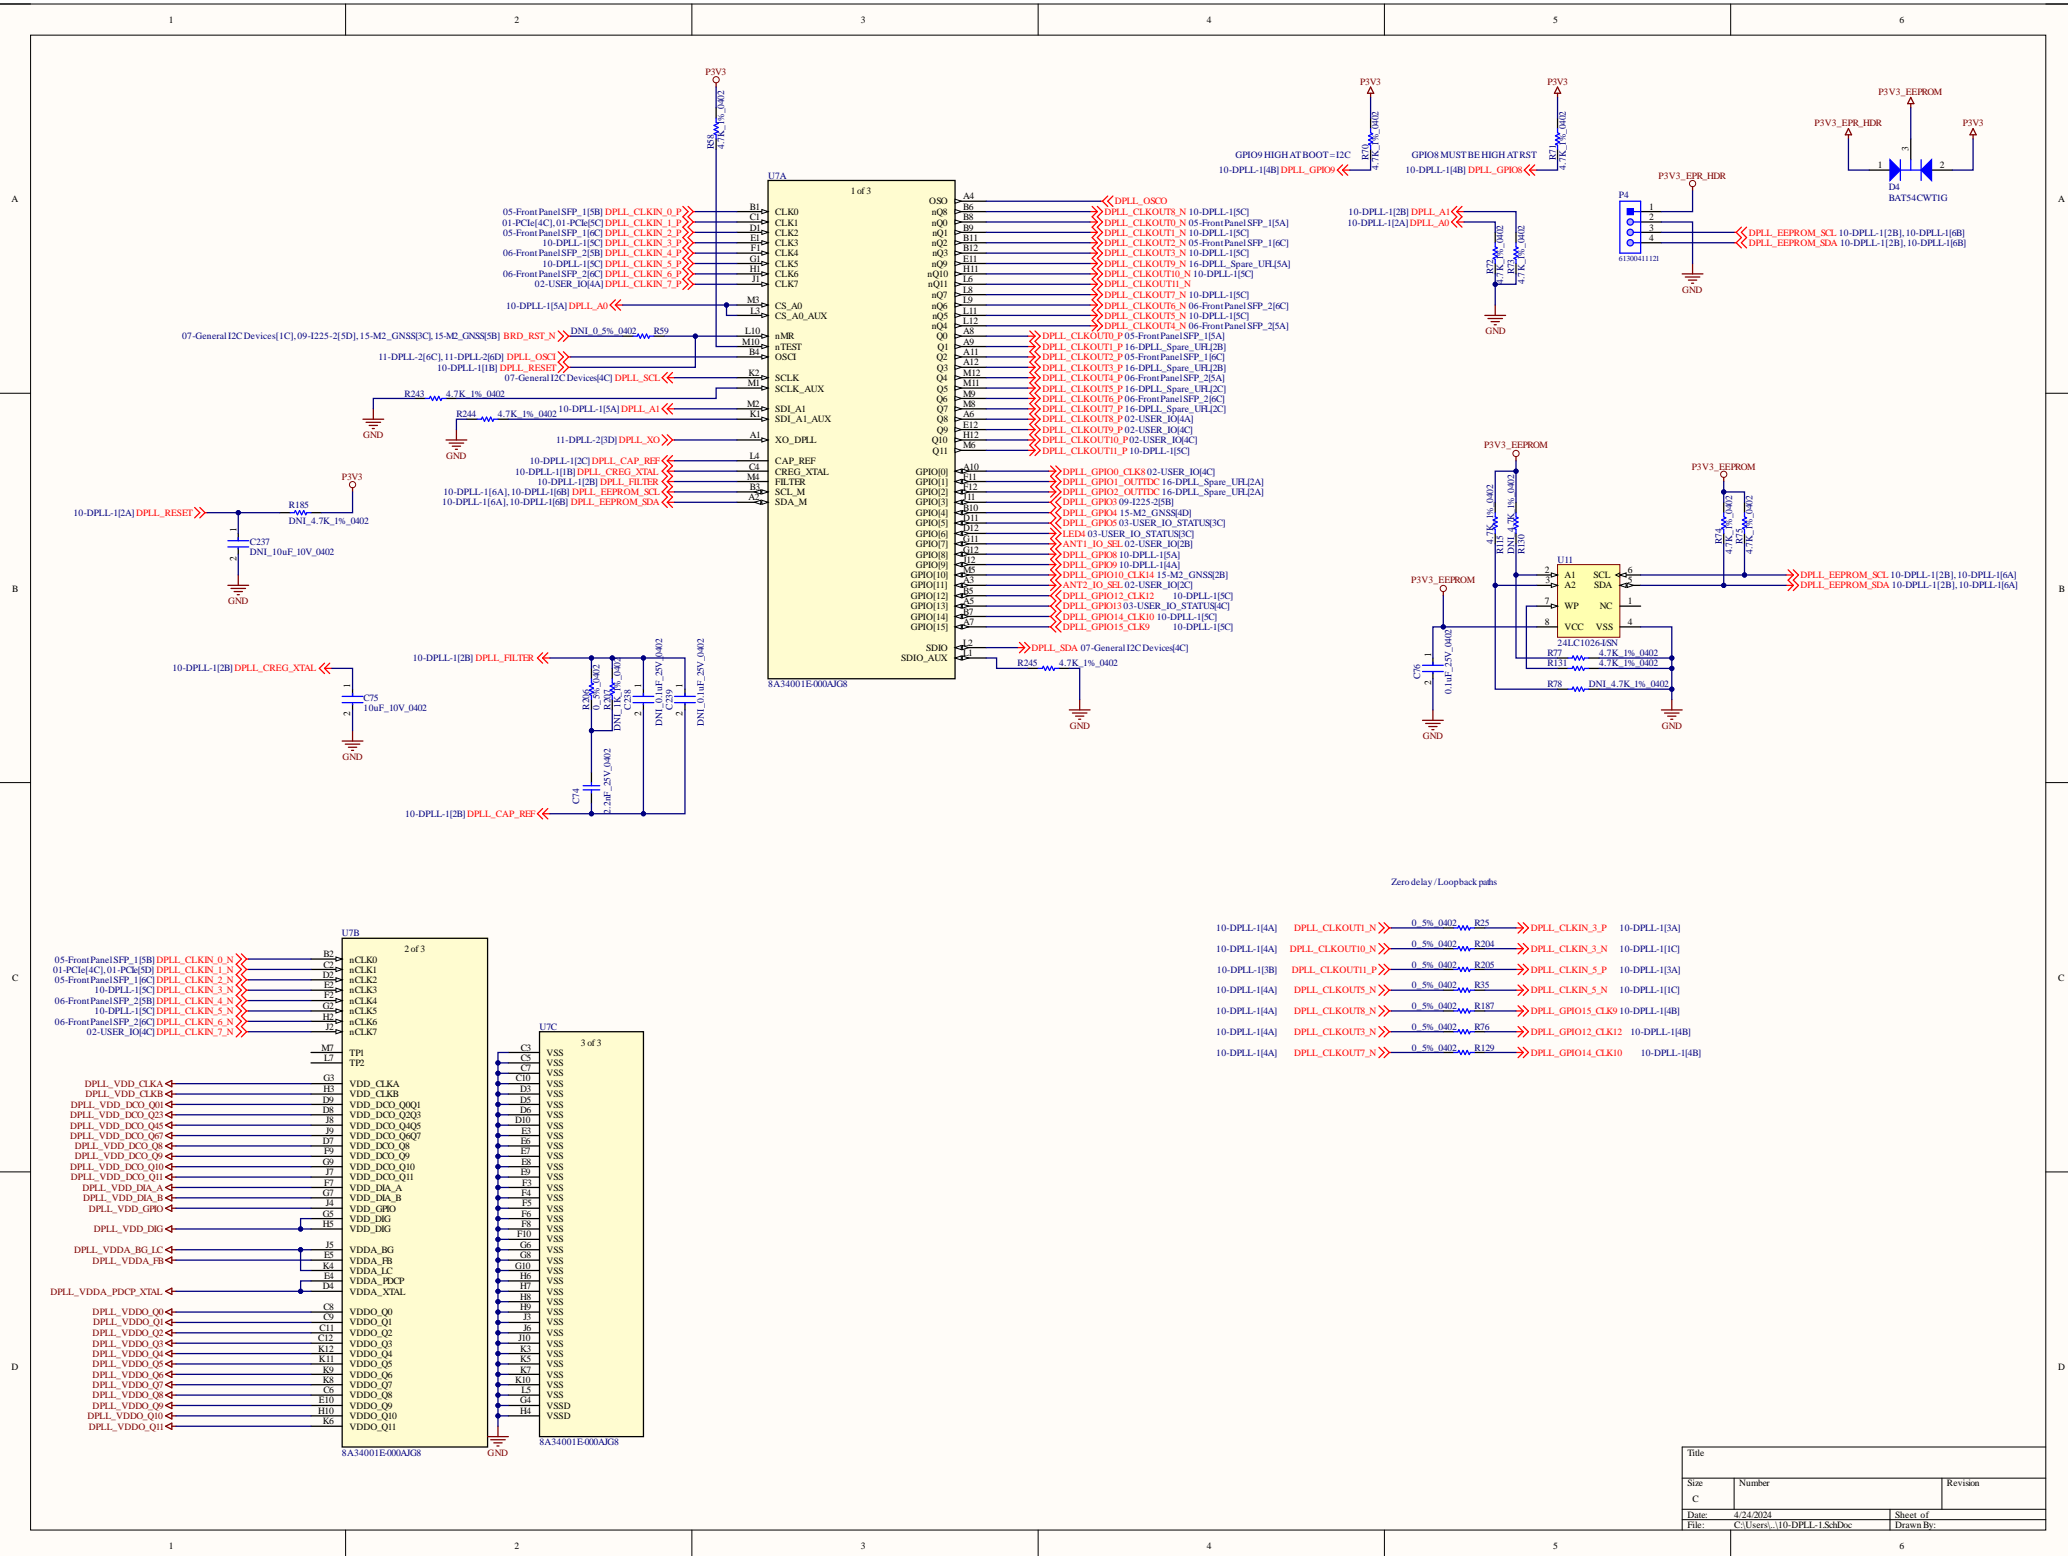



Title		
Size C	Number	Revision
Date: 4/24/2024		Sheet of
File: C:\Users\1101081\OneDrive\		Drawn By:

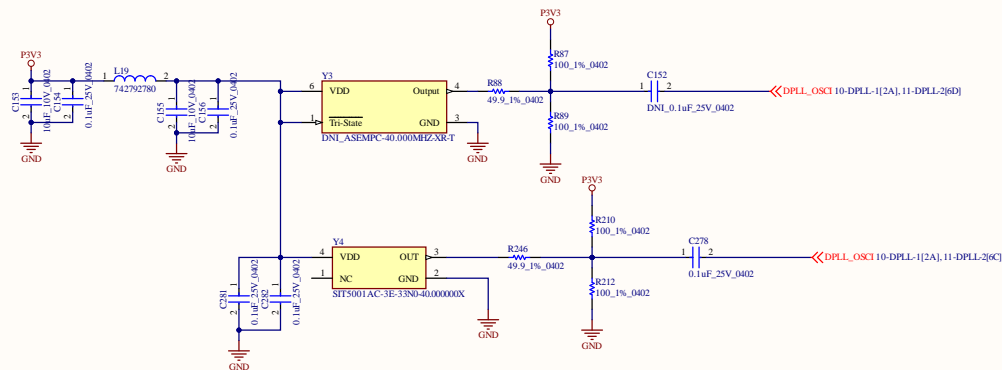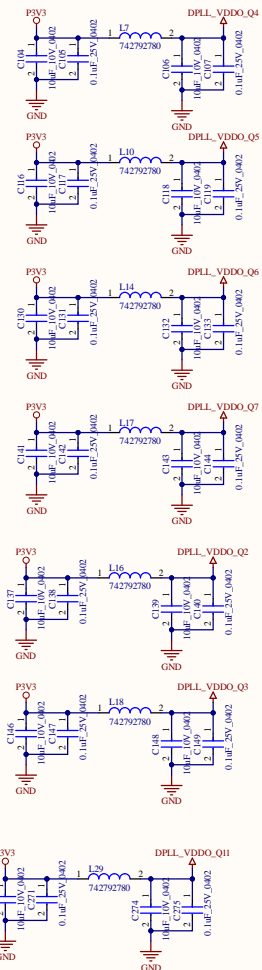

Title		
Size C	Number	Revision
Date: 4/24/2024	File: C:\Users\j11-DPL-2\SchDoc	Sheet of Drawn By:

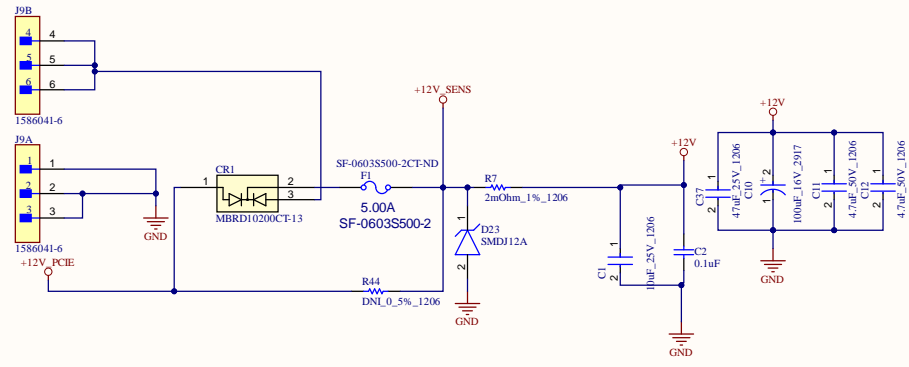





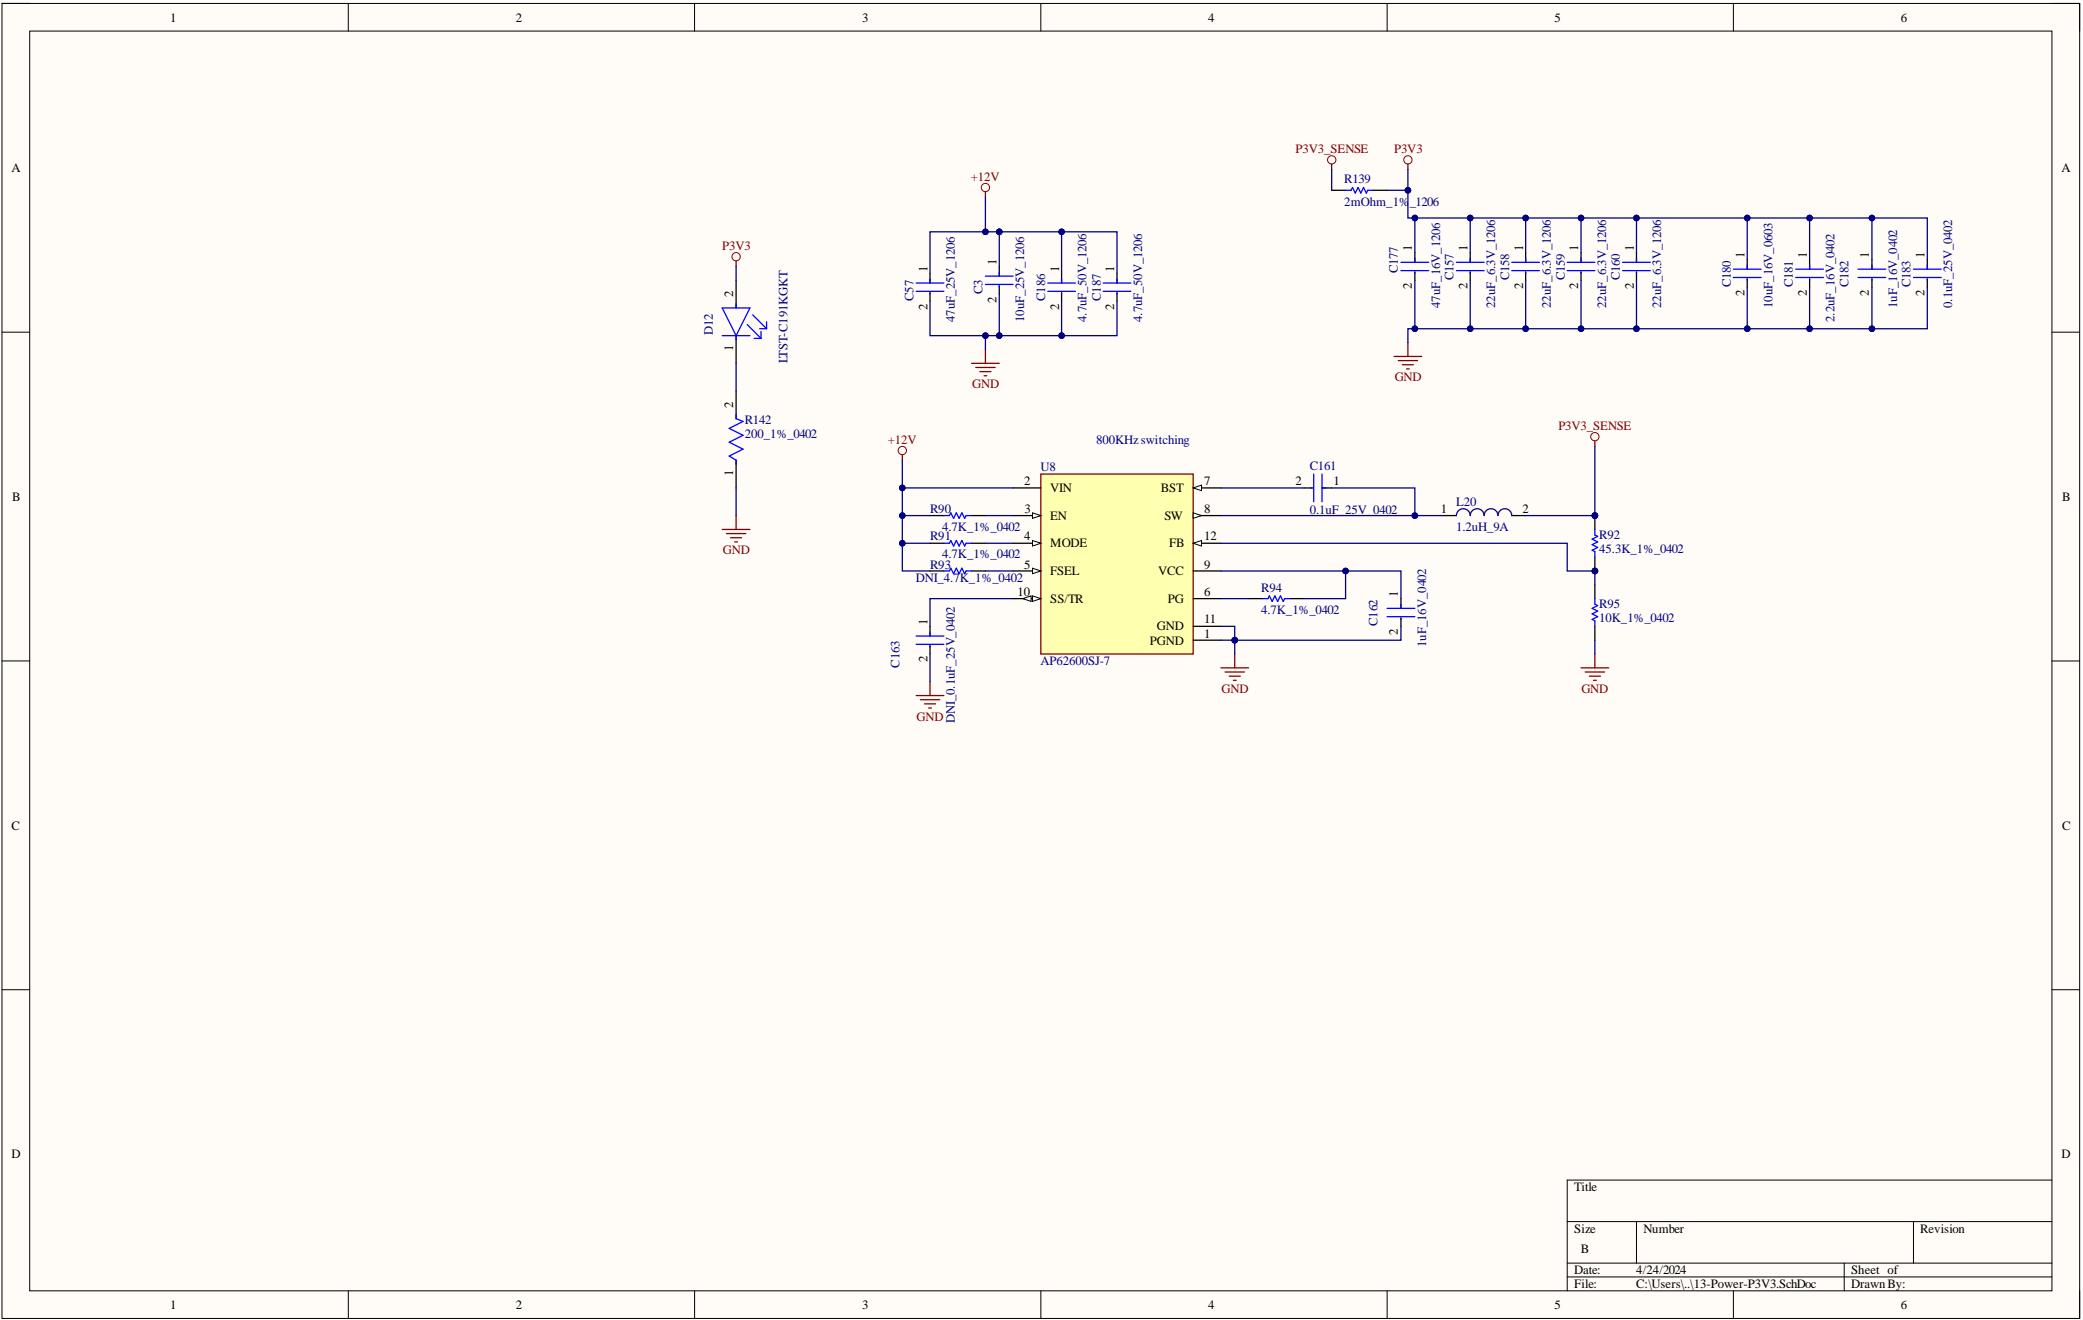


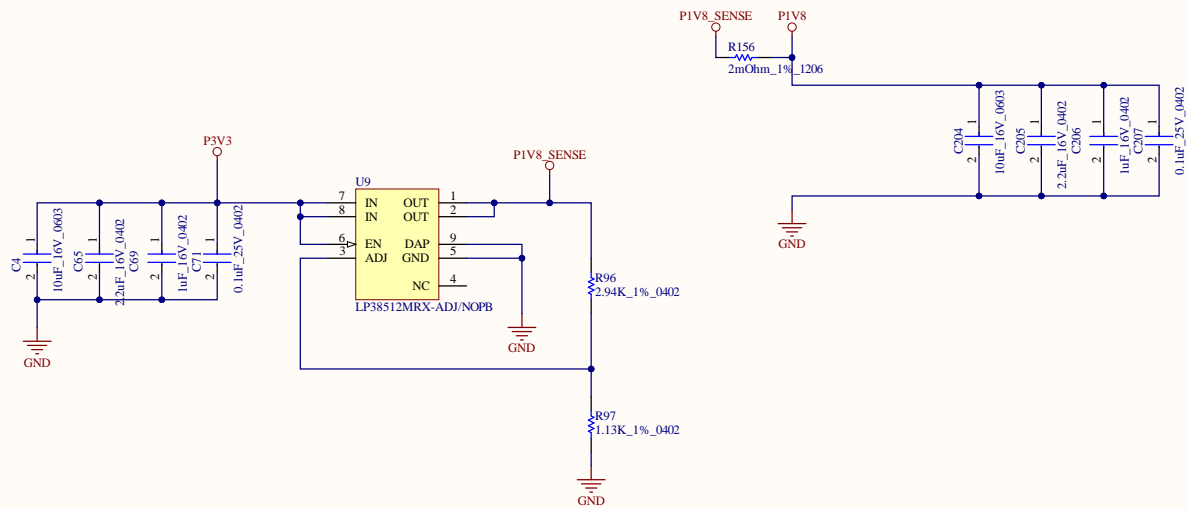


Title		
Size	Number	Revision
B		
Date:	4/24/2024	Sheet of
File:	C:\Users\...\14-Power-P1V8.SchDoc	Drawn By:

## A

1

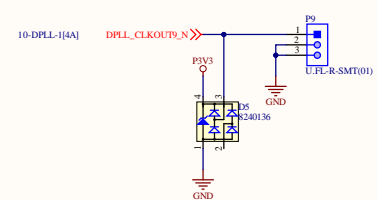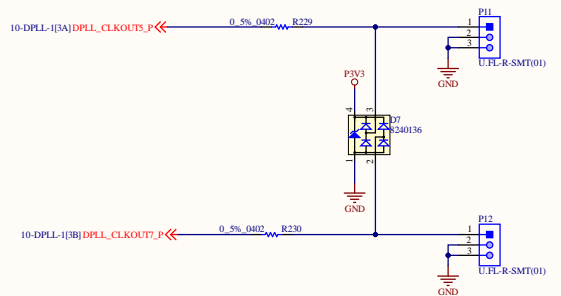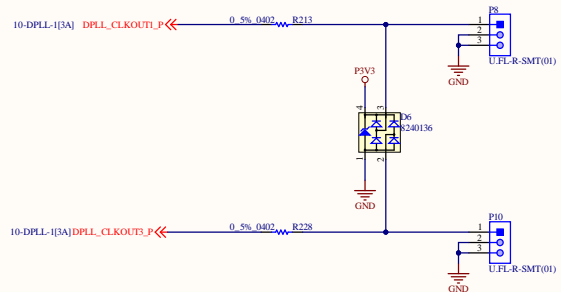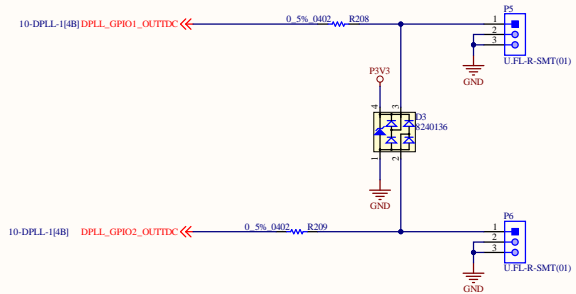

## Calibration traces

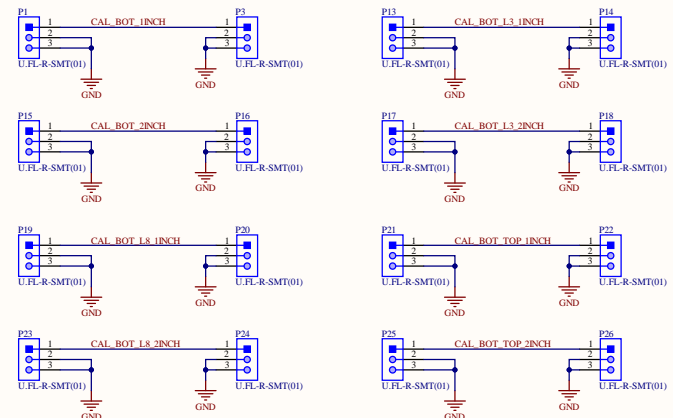

Title		
Size	Number	Revision
C		
Date:	4/24/2024	Sheet of
File:	C:\Users\...16-DPLL_Spare_UFL_SchD4	Drawn By: