




Power Indicator LEDs




Test Points

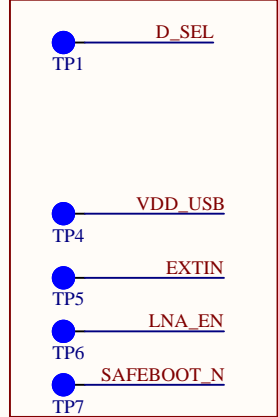


Optional: SPI & I2C Interface



Optional: Interface Selection



NEO-M8N

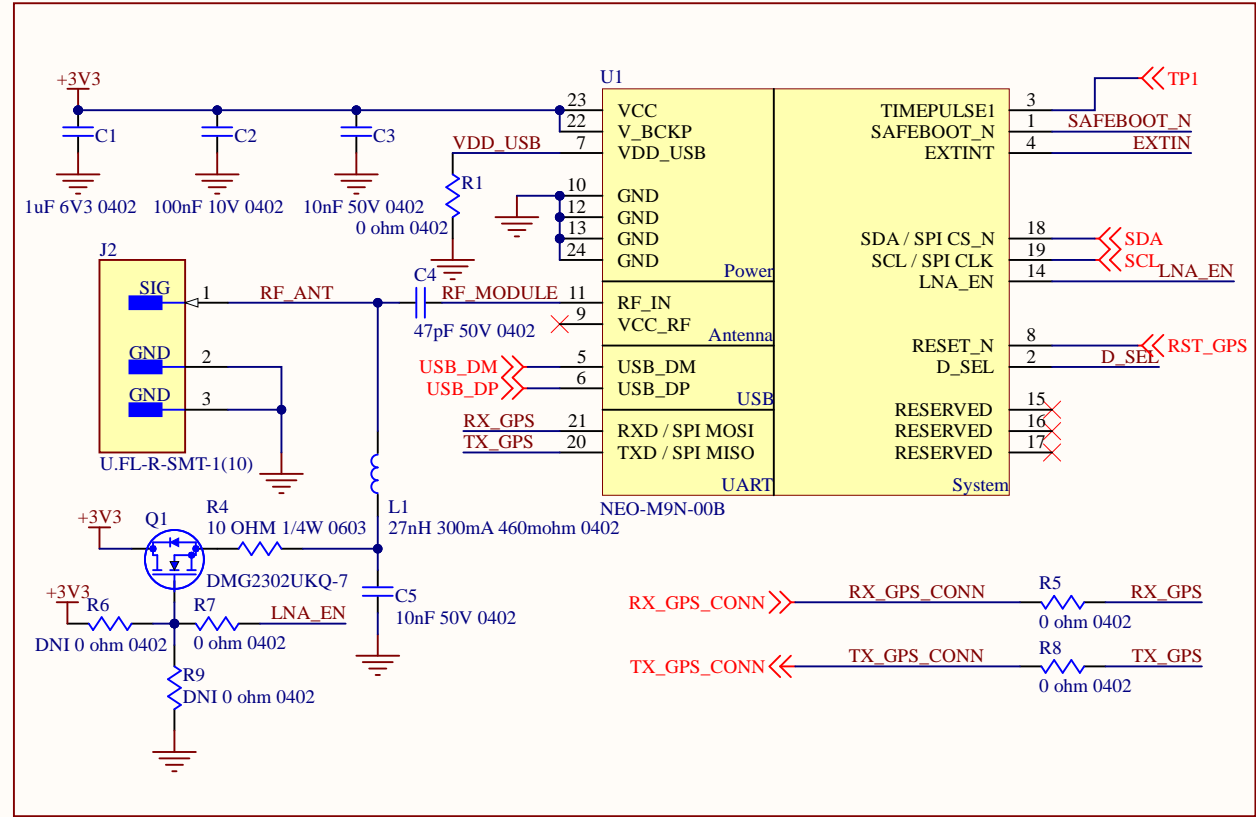

Default Interface Selection (left open):


PIN 20: UART TX
PIN 21: UART RX
PIN 19: DDC SCL
PIN 18: DDC SDA


IF D_SEL pulled LOW:

PIN 20: SPI MISO
PIN 21: SPI MOSI
PIN 19: SPI CLK
PIN 18: SPI CS_N

LNA_EN

HIGH = ACTIVE ANTENNA ON
LOW = ACTIVE ANTENNA OFF



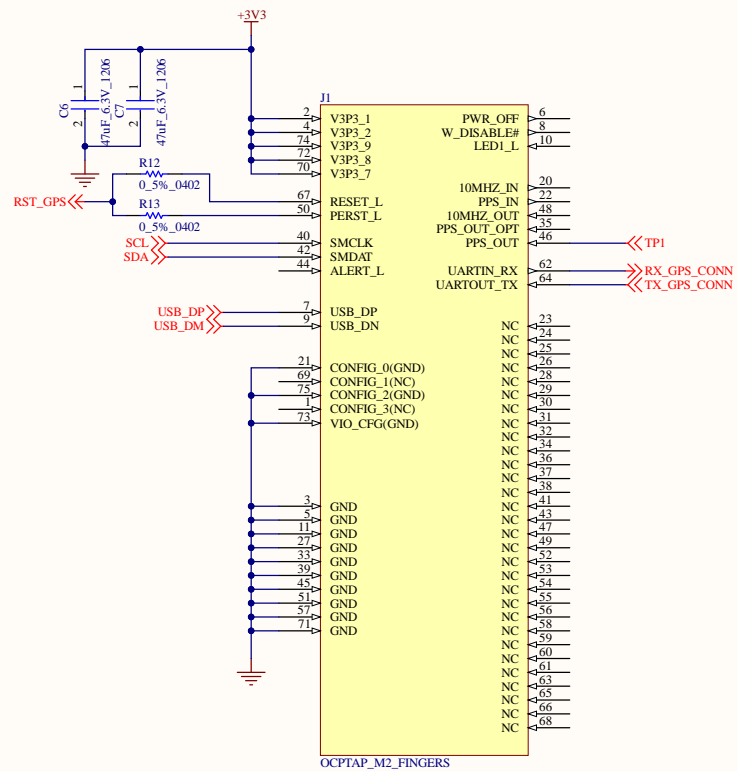

Title		
Size B	Number	Revision
Date:	5/18/2023	Sheet of
File:	C:\Users\...\02-M2_GoldFingers.SchDoc	Drawn By: