Solar ESS Co. Ltd.
53 Moo 2 Tambon Nanglae, Amphoe Muang
Chiang Rai 57100, Thailand
Tel 063 151 6694, 089 632 5829
www.solaress.org · LINE: solaress1

SOLAR ESS MONTHLY REPORT · OCTOBER 2026 · SOLISCLOUD · PLANT REPORT


Change settings

Forest house, Chiang Rai


Battery reserved · 417 kWh exported

9.28 kWp · 8 kW 1-phase hybrid inverter · battery

844	3.79	52%	15.3	417	3.7
kWh solar	kWh/kWp/day	solar share of use	kWh/day bought	kWh exported	kWh/day from battery

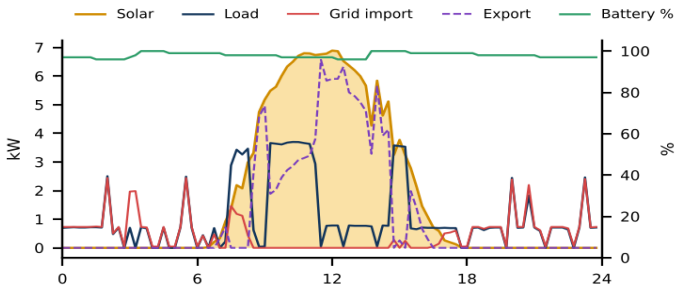

24 October, 5-minute data

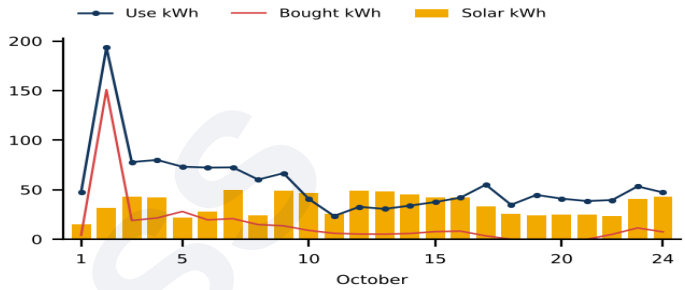

Daily totals, 1–24 October


What we found

• Battery sits at 96–100% and is not used: the house buys power at night while the battery is full.
• All house load is on the backup port, and the grid CT does not see it – the inverter exports up to 6.6 kW at midday: 417 kWh sent to the grid in 24 days, unpaid.
• 132 alarms in the period, mostly NO-Grid.

What to do

• Move the house load (or the CT) so the meter measures the whole house; set Work Mode to Self-Use and export limit to 0 W.
• Lower the backup/reserve SOC to 20–30% so the battery covers the night.
• Expected: about 400 kWh/month less export and 300 kWh/month less grid purchase.

How this plant compares with the other SolisCloud plants (kWh per kWp per day, 1–24 Oct)

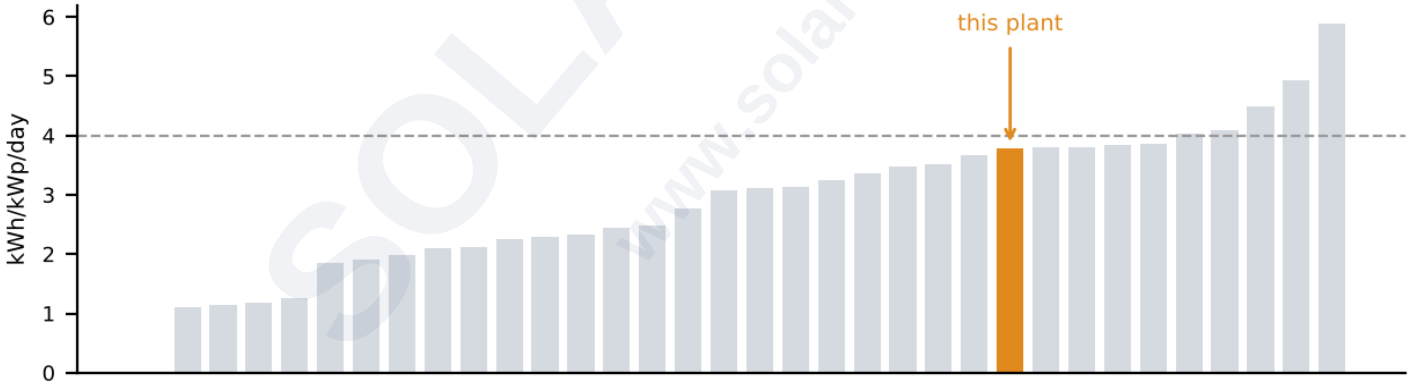

Rank 10 of 34 for yield per kWp. Dashed line ≈ 4.0, a typical clear month in the north and centre. A low yield is not always a fault – a full battery or little daytime load makes the inverter throttle the panels.

This plant report is part of the October 2026 SolisCloud fleet review on www.solaress.org (Technical → Monthly Report), which also lists the recommended standard settings. Figures are estimates from monitoring data; site name removed.