Solar ESS Co. Ltd.
53 Moo 2 Tambon Nanglae, Amphoe Muang
Chiang Rai 57100, Thailand
Tel 063 151 6694, 089 632 5829
www.solaress.org · LINE: solaress1

SOLAR ESS MONTHLY REPORT · OCTOBER 2026 · SOLISCLOUD · PLANT REPORT


Change settings

Farm A, Trang


56 grid over-voltage trips

10 kWp · 10 kW 1-phase hybrid inverter · battery

596	2.48	62%	14.0	0	11.3
kWh solar	kWh/kWp/day	solar share of use	kWh/day bought	kWh exported	kWh/day from battery

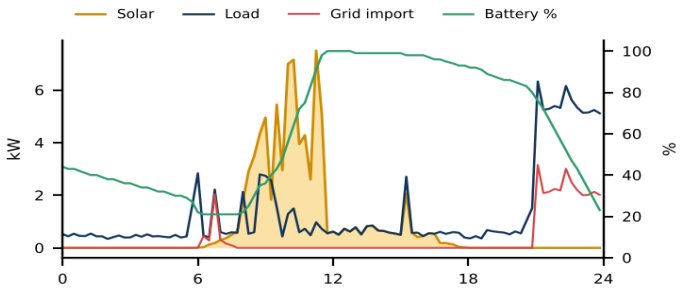

24 October, 5-minute data

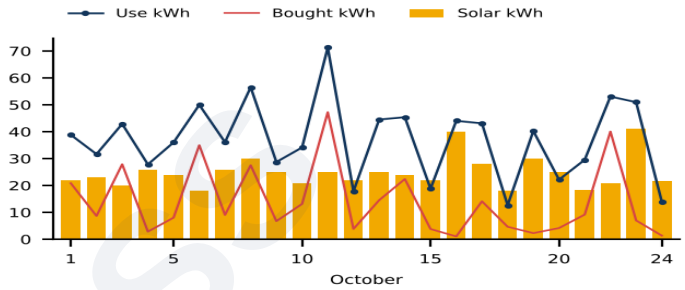

Daily totals, 1–24 October


What we found

• 56 'OV-G-V01' grid over-voltage alarms in October – the inverter disconnects each time and production stops.
• Battery discharge is capped at about 3.2 kW while the evening load is 5 kW, so the grid supplies the rest.
• Battery full by 11:30, then the panels are throttled for the rest of the day.

What to do

• Measure grid voltage at the meter; ask PEA to check the transformer tap if it is above 240–250 V. Check AC cable size/voltage drop to the inverter.
• Raise the battery discharge current limit (within the BMS limit).
• Move pumps and other big loads to 11:00–15:00; a second battery would also use the afternoon surplus.

How this plant compares with the other SolisCloud plants (kWh per kWp per day, 1–24 Oct)

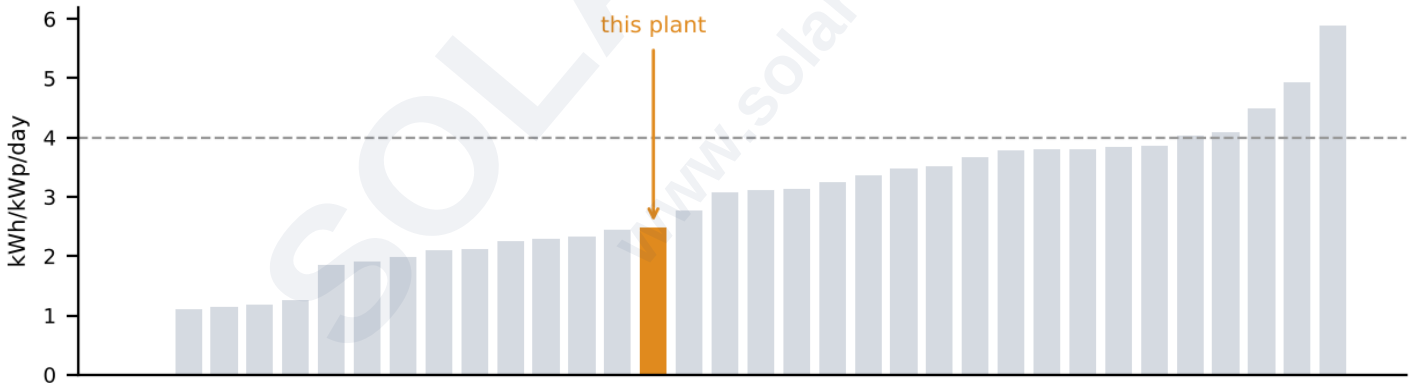

Rank 20 of 34 for yield per kWp. Dashed line ≈ 4.0, a typical clear month in the north and centre. A low yield is not always a fault – a full battery or little daytime load makes the inverter throttle the panels.

This plant report is part of the October 2026 SolisCloud fleet review on www.solaress.org (Technical → Monthly Report), which also lists the recommended standard settings. Figures are estimates from monitoring data; site name removed.