Solar ESS Co. Ltd.
53 Moo 2 Tambon Nanglae, Amphoe Muang
Chiang Rai 57100, Thailand
Tel 063 151 6694, 089 632 5829
www.solaress.org · LINE: solaress1

SOLAR ESS MONTHLY REPORT · OCTOBER 2026 · SOLISCLOUD · PLANT REPORT


Change settings

Home S6, Phetchabun


Battery stops at night · 359 kWh exported

8 kWp · 8 kW 1-phase hybrid inverter · battery

864	4.50	51%	18.7	359	12.5
kWh solar	kWh/kWp/day	solar share of use	kWh/day bought	kWh exported	kWh/day from battery

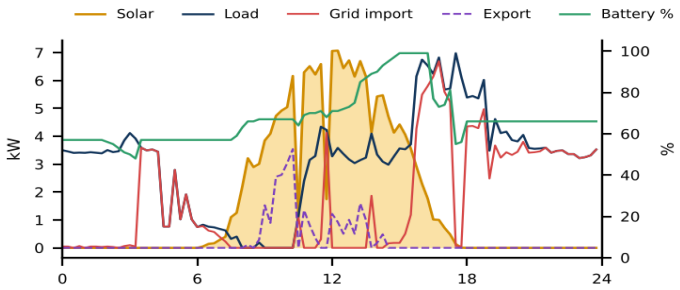

24 October, 5-minute data

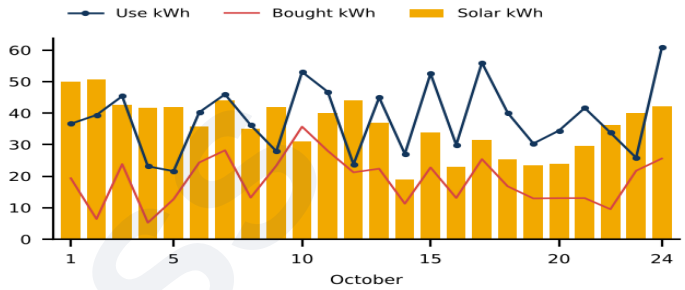

Daily totals, 1–24 October


What we found

• At night the battery stops discharging with 66% left while the house buys 3.4 kW from the grid.
• At midday the battery charges at only about 3 kW and the rest (up to 3.5 kW) is exported: 359 kWh in 24 days, unpaid.
• Good yield (4.5 kWh/kWp/day).

What to do

• Check Time-of-Use / discharge time slots: allow discharge 00:00–24:00 down to 20%.
• Raise the battery charge current limit (within the battery's BMS limit) and set the export limit to 0 W unless the owner has a PEA sell-back contract.
• Expected: about 350 kWh/month more self-use.

How this plant compares with the other SolisCloud plants (kWh per kWp per day, 1–24 Oct)

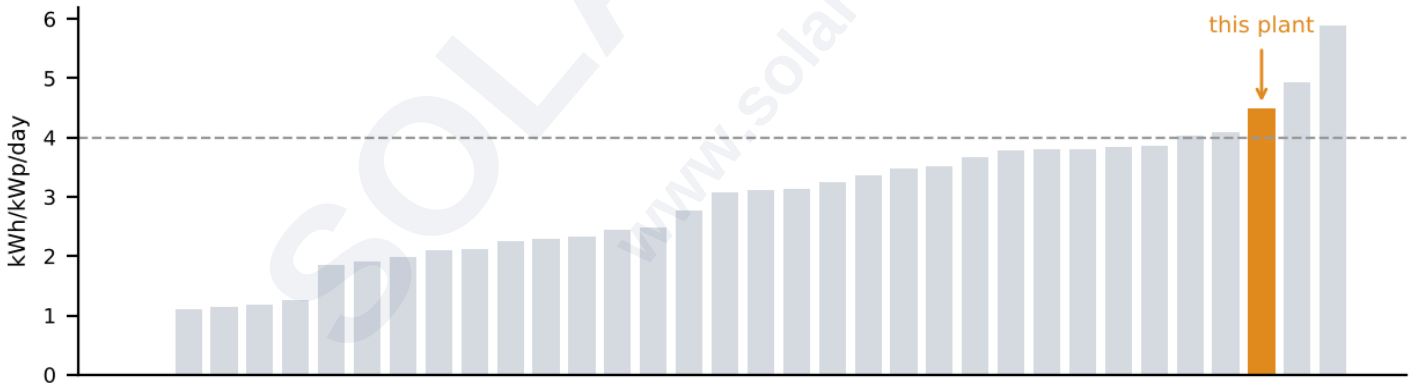

Rank 3 of 34 for yield per kWp. Dashed line ≈ 4.0, a typical clear month in the north and centre. A low yield is not always a fault – a full battery or little daytime load makes the inverter throttle the panels.

This plant report is part of the October 2026 SolisCloud fleet review on www.solaress.org (Technical → Monthly Report), which also lists the recommended standard settings. Figures are estimates from monitoring data; site name removed.