




REVISION RECORD


REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

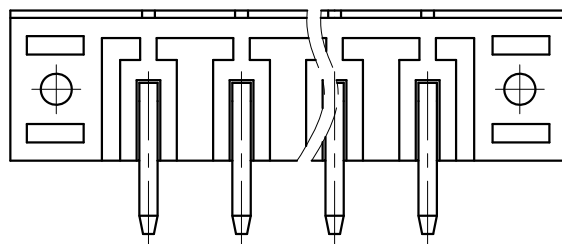


□ 1.00

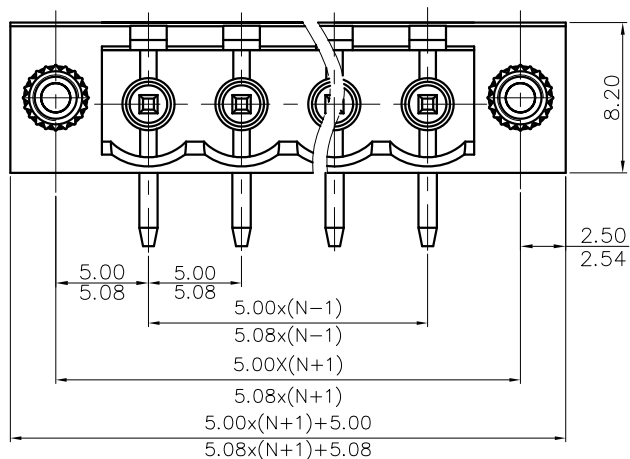

VIEW A

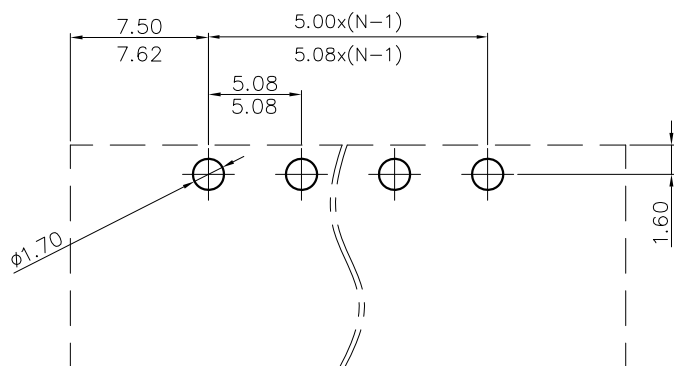

PCB LAYOUT

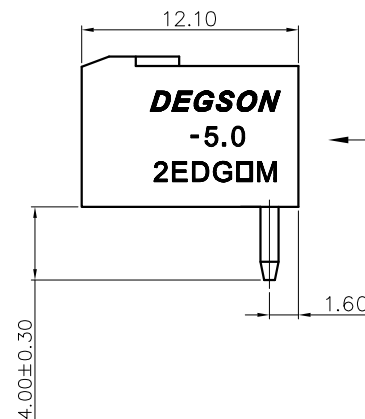

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 15A
2. Withstanding voltage : AC1600V/1Min.

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	320V
Rate current(A)	20A

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.0/5.08mm, Poles : N=02~22P
3. Operating temperature: -40°C~+105°C
4. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm	Tolerance
Over 6 TO 10	Over 10 TO 24	±0.15
Over 24 TO 30	Over 30 TO 60	±0.20
Over 60 TO 100	Over 100 TO 150	±0.30
Over 150 TO 300	Over 300 TO 600	±0.50
Over 600 TO 1200	Over 1200 TO 2400	±0.70
Over 2400 TO 4800	Over 4800 TO 9600	±1.00
Over 9600 TO 19200	Over 19200 TO 38400	±1.30
Over 38400 TO 76800	Over 76800 TO 153600	±1.60
Over 153600 TO 307200	Over 307200 TO 614400	±2.00

5. RoHS Compliance

2EDGRM - 5.0/5.08 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles)(Single Pitch) (Color) : 1. (Grey)
 2. (Blue)
 3. (Black)
 4. (Green)
 5. (Orange)
 6. (Red)
 7. (Transparent)
 8. (Yellow)
 9. (White)

(RoHS)
 00A - (Standard)

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: 2EDGRM-5.0/5.08-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	REV: /			
THIRD ANGLE PROJECTION		DRAWING NO.:		SHEET	DO
		MM (INCH)		1/1	
		DO NOT SCALE DRAWING		SCALE	1:1