

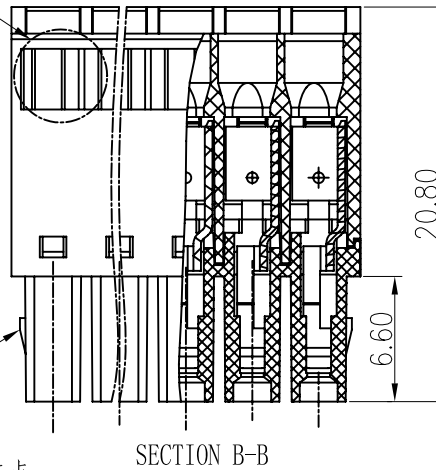


注:2-6P带卡点,7-24P,不带卡点

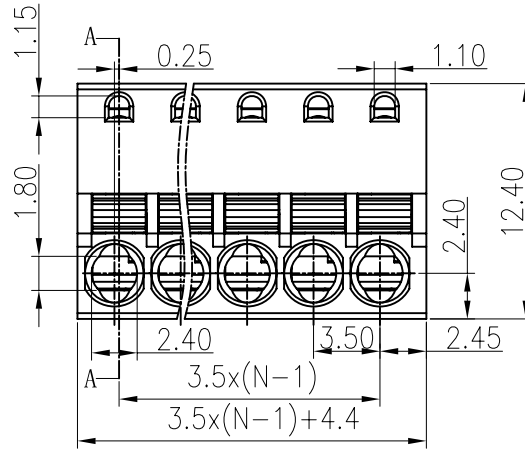

SECTION B-B

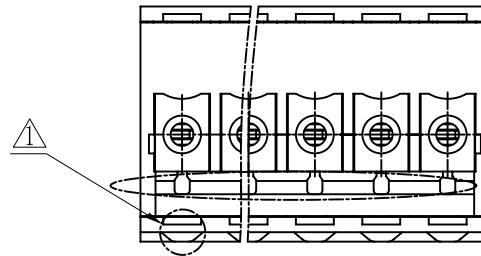



SECTION A-A

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
10-0260		避专利改外形	HD	06/28/10
10-0342		增加VDE刻字	Yi.Zeng	10/08/10


Notes:

1. pitch:3.5mm poles:2-24p
2. Rated voltage/current:UL 300V/8A  
VDE 250V/12A
3. Insulation Resistance:5000MΩ/DC1000V
4. Withstanding voltage: AC2000V/1Min
5. Wire range:28-16AWG 0.2-1.5mm<sup>2</sup>
6. Temp. Range:-40° C~+105° C
7. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

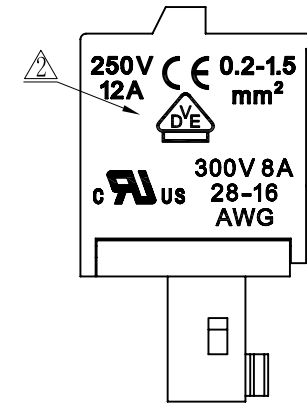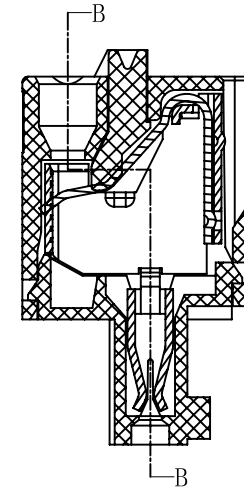

5	15EDGKD Spring	X000001310(H)	XX	Stainless steel	
4	15EDGKD Clamp	1088B00010(H)	XX	Phosphor bronze	Snce plated
3	15EDGKD Button	1088D0501A(H)	XX	PA66	UL94V-0
2	15EDGKD-3.5-Cover	1087C0YXXA(H)	1	PA66	UL94V-0

	1	15EDGKD-3.5-Housing		1087A0YXXA (H)		1	PA66	UL94V-0	
	ITEM	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES	
DETACHED LISTS			DFTO Zhuwm		DATE 07/18/'08		<div> <b>DEGSON</b> ®</div> <div>宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div>		
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE				
			MFO		DATE				
			APPLV		DATE				
			MATERIAL :						
	MM .0 ± .00 ± .000 ±		± ± ±				NAME 15EDGKD-3.5-XXP-1Y-00A(H)		
	ANGLES ± 1°		G.E :						
			FINISH :						
			SCALE :						
	THIRD ANGLE PROJECTION				DO NOT SCALE DRAWING		SHEET 1		OF 1
d	A								