


IEC Standard

Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4.0kV
Rate voltage(V)	320V
Rate current(A)	20A


4. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				Tolerance	Tolerance zone
TO	Over TO	TO	Over TO	Over TO	Over TO		
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150	0.1/1 ≤
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2

5.RoHS Compliance

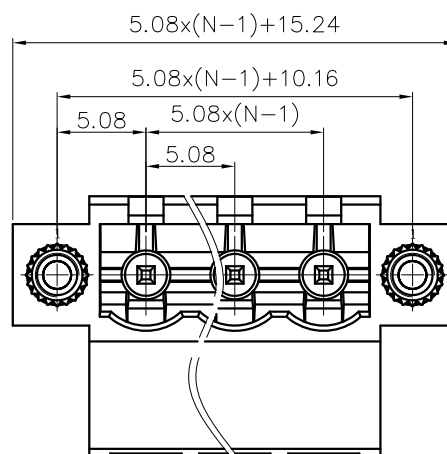



VIEW B

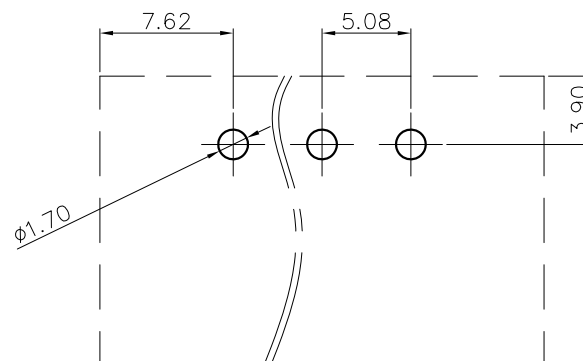

PCB LAYOUT

2EDGLM - 5.08 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)

9.(White)

DETACHED LISTS	PART NO.: /	<div> 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD</div>			
	APPD: /	NAME: 2EDGLM-5.08-XXP-1Y-00A(H)			
	CHKD: /				
	DRFT: /	TITLE: CUSTOMER DRAWING		REV	DO
	<div> THIRD ANGLE PROJECTION</div>	DRAWING NO.: /		SHEET	1/1
		<div><div><div>MM (INCH)</div><div></div></div>DO NOT SCALE DRAWING</div>		SCALE	1:1