
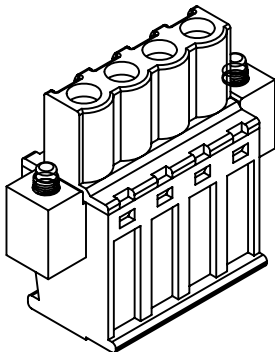
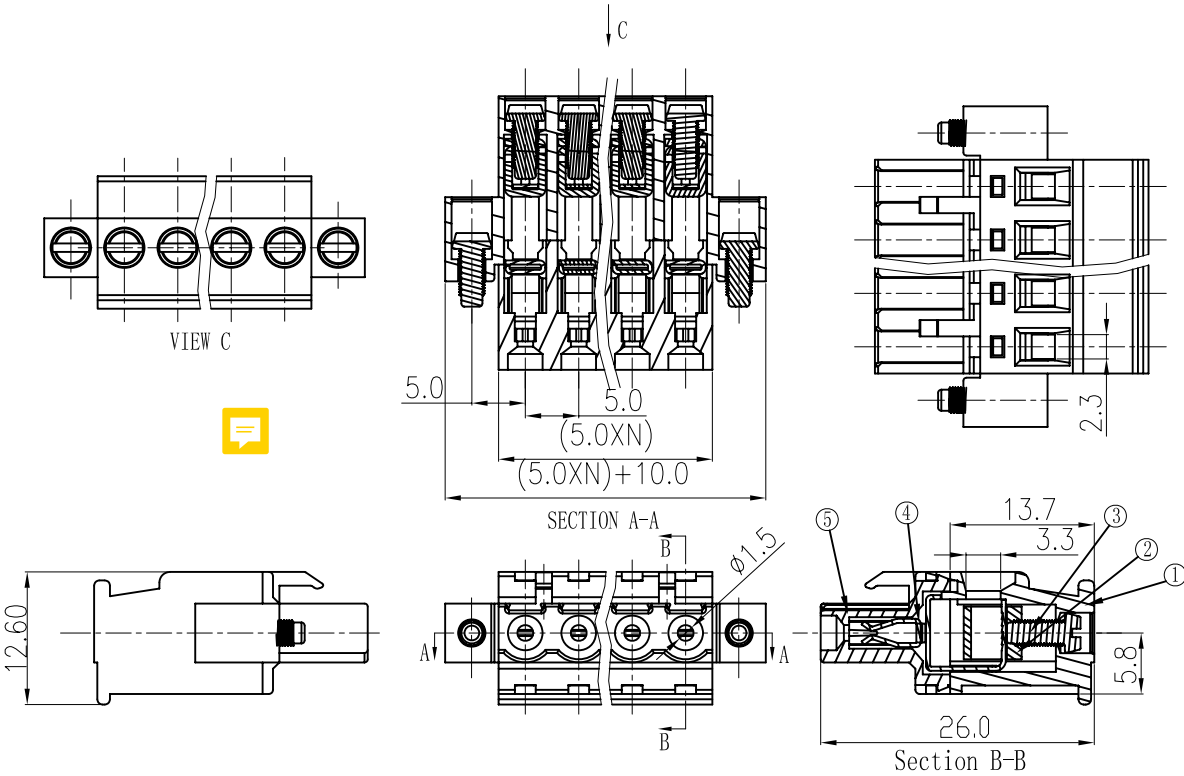


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing emend	CSX	04/18/06
△		工程变更	CSX	11/30/06
△		增加UL刻字	CSX	04/05/07
△		品名、料号增加环保标示“(H)”	LJH	12/11/07
△		增加VDE, CE刻字	WLM	02/12/09





- Notes:
1. Pitch:5.0mm ,Poles:2-22P
  2. Rated voltage/current:UL 300V/15A  
VDE 320V/10A
  3. Operation temperatures:-45℃~+105℃
  4. Withstanding Voltage:AC2000V/1min
  5. Insulation Resistance:5000Ω/DC1000V
  6. Wire Range:28~12AWG, 2.5mm<sup>2</sup>
  7. Max. Torque Value:M2.5, 4.08kgf.cm
  8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150		—
to 6	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
								0.05/10

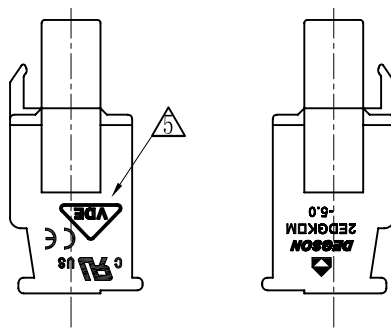

5	2EDGKA/B-5.0 COVER	1030C0YXXA (H)	1	PA66	UL94V-0
4	2EDGKA/B-CLAMP	1028B00010 (H)	XX	Phospor Bronze	Ni plated
3	2EDG SCREW-M2.5	S000000980 (H)△	XX+2	STEEL	Cr <sup>3+</sup> Zn
2	DG128 CAGE	X000000020 (H)	XX	BRASS	Ni plated

1		2EDGKAM/BM-5.0 HOUSING		1031A0YXXA (H)		1		PA66		UL94V-0		
ITEM		NAME OF PART			NO. OF PART		Q"TY		MATERIAL		NOTES	
DETACHED LISTS	<div>← MM (INCH) →</div>		DFTO WYP		DATE 06/28/04"		<div> 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD</div>					
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE							
			MFO		DATE							
			APPVL		DATE							
	MM						NAME 2EDGKAM-5.0-XXP-1Y-00A(H)					
	.0 ±		±									
	.00 ±		±									
	.000 ±		±				DRAWING NO. 2EDGKAM-5.0-E01					
ANGLES ± 1°		G.E :				SIZE A3						
		FINISH :				REV T5 02/12/09						
THIRD ANGLE PROJECTION		SCALE :										
						DO NOT SCALE DRAWING						
						SHEET 1 OF 1						