





Notes:

1. Pitch: 3.5mm , Poles: 2-24P
2. Rated voltage/current: UL 300V/8A  
VDE 250V/7A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Wire Range: 28~16AWG, 0.5-1.5mm<sup>2</sup>
7. Max. Torque Value: M2, 2.04kgf.cm (1.77Lb. in)
8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE

Pitch range in mm		Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1
							0.05/10

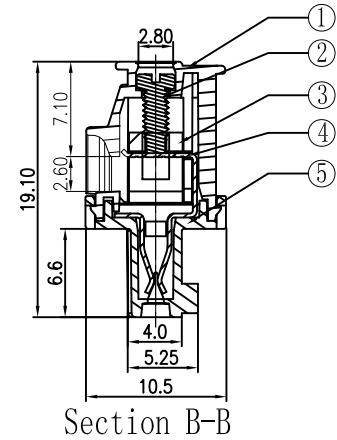

5	15EDGKA/B-3. 5-100A-Cover	1033C0YXXE (H)	1	PA66	UL94V-0	
4	15EDGKA/B-100A-Clamp	1033B00020 (H)	XX	Phosphor bronze	SnCe	
3	15EDGK Cage	X000000010 (H)	XX	Brass	Ni Plated	
2	15EDG Screw-M2.0	S000001360 (H)	XX	Steel	Cr <sup>3+</sup> Zn	
1	15EDGKA/B-3. 5-100A-Housing	1033A0YXXE (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES	
DETACHED LISTS	<div>← MM (INCH) →</div>		DFTO Apply	DATE 04/11/09*		
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
			MFO	DATE		
			APPVL	DATE		
	MM .0 ± ± .00 ± ± .000 ± ±		MATERIAL :		<div> 宁波高正电子有限公司 DEGSN ELECTRONICS CO., LTD</div> <div>NAME 15EDGKB-3. 5-XXP-1Y-100A (H)</div>	
	ANGLES ± 1°		G.E :			
			FINISH :			
	THIRD ANGLE PROJECTION		SCALE : 1:1		DRAWING NO. 15EDGKB-3.5-E100	
					/PART NO.	
					DO NOT SCALE DRAWING	
				SIZE A3	REV TO 09/10/10*	
				SHEET 1	OF 1	