


Notes:



1. Pitch:3.5mm , Poles:2-24P
2. Rated voltage/current:UL 300V/8A  
VDE 250V/7A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:28~16AWG, 0.5-1.5mm<sup>2</sup>
7. Max. Torque Value:M2, 2.04kgf.cm(1.77Lb.in)
8. Undimensioned Tolerances:

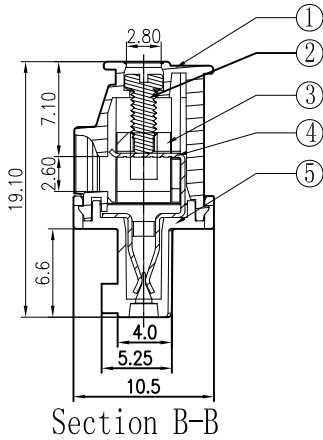

C向

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE

Pitch range in mm		Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1
							0.05/10

5	15EDGKA/B-3. 5-100A-Cover	1033C0YXXE (H)	1	PA66	UL94V-0		
4	15EDGKA/B-100A-Clamp	1033B00020 (H)	XX	Phosphor bronze	SnCe		
3	15EDGK Cage	X000000010 (H)	XX	Brass	Ni Plated		
2	15EDG Screw-M2.0	S000001360 (H)	XX	Steel	Cr <sup>3+</sup> Zn		
1	15EDGKA/B-3. 5-100A-Housing	1033A0YXXE (H)	1	PA66	UL94V-0		
ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTES	
DETACHED LISTS	<div>← MM (INCH) →</div>		DFTO Apple		DATE 04/11/09*		
	TOLERANCES EXCEPT AS NOTED		CHKD		<div> 宁波高正电子有限公司 DEGSN ELECTRONICS CO., LTD</div>		
			MFO				
			DATE				
			APPVL				
	DATE		NAME 15EDGKA-3. 5-XXP-1Y-100A (H)				
	MATERIAL :						
	ANGLES ± 1°						
	G.E :						
			FINISH :		DRAWING NO. 15EDGKA-3.5-E100		SIZE
THIRD ANGLE PROJECTION		SCALE : 1:1		/PART NO.		A3	09/10/10*
DO NOT SCALE DRAWING				SHEET 1		OF 1	