


Title		
Size	Number	Revision
A4		
Date:	2009-3-27	Sheet of
File:	C:\Documents and Settings\...\daziban.SchDoc	Drawn By:

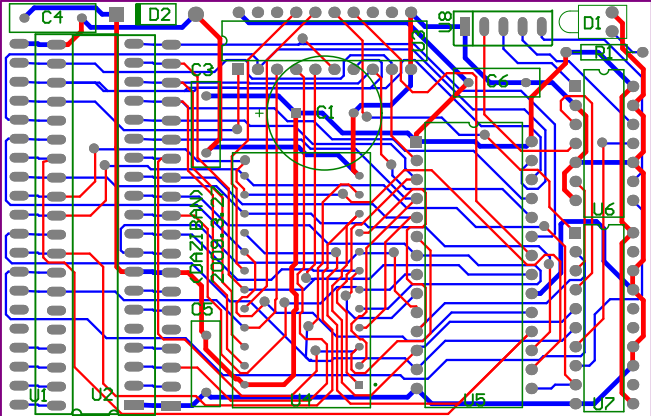

Comment	Description	Designator	Footprint	LibRef	Quantity
Cap Pol1	Polarized Capacitor (Radial)	C1	RB7.6-15	Cap Pol1	1
Cap	Capacitor	C3, C4, C5, C6	RAD-0.3	Cap	4
LED1	Typical RED GaAs LED	D1	LED-1	LED1	1
Diode 1N4007	1 Amp General Purpose Rectifier	D2	DO-41	Diode 1N4007	1
Res2	Resistor	R1	AXIAL-0.4	Res2	1
SY6502	SY6502	U1	DIP40	SY6502	1
6502 Connector	6502 Connector	U2	DIP40_CONNECTOR	6502Connector	1
GAL16V8B-15LPI	GAL16V8 High Performance E 瞓 MOS PLD Generic Array Logic: 5.0 V, 15 ns, Industrial Grade	U3	PDIP20	GAL16V8B-15LPI	1
DS1220Y-120	16K Nonvolatile SRAM	U4	ENDIP24	DS1220Y-120	1
M27C256B-12F1	256 Kbit (32Kb X 8) UV EPROM and OTP EPROM	U5	FDIP28W	M27C256B-12F1	1
SN74LS132N	Quadruple 2-Input Positive-NAND Schmitt Trigger	U6	N014	SN74LS132N	1
SN74LS373N	Octal D-Type Transparent Latch and Edge-Triggered Flip-Flops	U7	N020	SN74LS373N	1
A472J_4.7K	A472J	U8	A472J_4R	A472J	1