


Desk & Cat-Eared Character — Brick Diorama

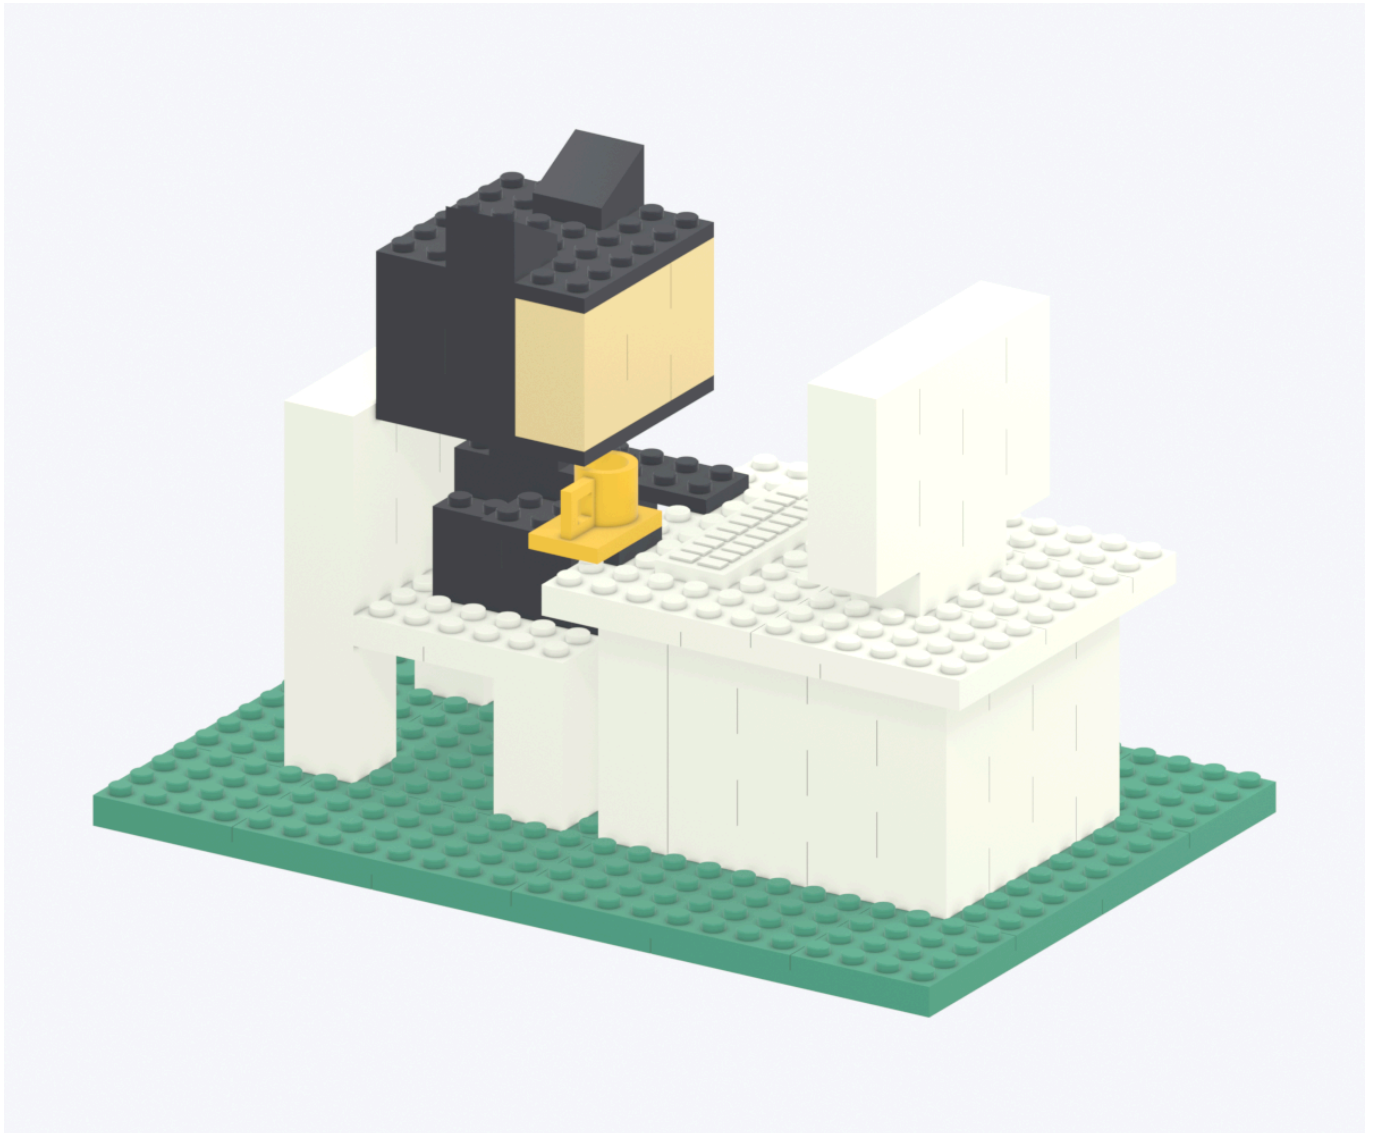

191.8 × 127.8 × 128.0 mm / 137 parts / 15 production types / 37 steps / 5 colors

An independent design of a white desk and chair, a black cat-eared character with a plain light-beige face, and a yellow mug. Print separate parts and stack them together. Grid pitch: 8 mm; brick body: 9.6 mm; plate body: 3.2 mm. The box, printed branding and official logos are not modeled.

P1S · 0.2 mm nozzle · PLA / NOT_SLICED

Digital prototype only. Physical fit, warping, retention, strength, tip-over and durability are untested. The actual plate, PLA brand and slicer profile are not confirmed. Test a small batch before printing the entire kit.

Images are renders, CAD projections/sections, or explicitly labeled bounding-box diagrams, not photographs of printed parts. IDs are guide labels, not physical markings. Identical type/color parts are interchangeable.

[Japanese PDF](#) / The interactive guide preserves assembly state when switching Japanese / English. The shared video retains its Japanese header; English synchronized subtitles and SRT/VTT files are included.

Test first / Print order is not assembly order

1. One loose-fit pair only

`coupons/01-loose-pair-NOT_SLICED.3mf`

FIT-M-D470: male diameter 4.70 mm. FIT-F-CP12: female radial clearance +0.12 mm. Male diameter correction and female radial clearance are independent settings. Check seating and removal with gentle finger pressure. Test pieces are excluded from the 137-part assembly BOM.

2. Two production 2×2 and two production 2×4 parts

`coupons/02-representative-NOT_SLICED.3mf`

The production candidate uses male diameter 4.80 mm and female radial clearance +0.04 mm; it is untested. A successful loose pair does not qualify the tighter production geometry. If calibration changes are needed, regenerate the affected files consistently. Do not scale the STL and break the 8 mm pitch.

3. Base seam, then the complete base

`coupons/03-base-joint-NOT_SLICED.3mf`

Arrange two 8×8 plates along X. Turn the 4×8 plate so its long edge follows X, and put its lower corner at X=32, Y=0, Z=3.2 mm. It bridges the X=64 mm seam. Check warping, alignment and retention before printing the full base, desk and remaining parts in small batches.

Slicer checks


Extract the ZIP. Import 3MF as geometry and select your actual P1S / 0.2 mm nozzle / PLA / plate profile. Import STL in mm at 100%. Do not load the same part from both formats. Single-color plates do not require AMS.

Print open undersides down. Do not fill the receiving cavities with brim or support. Check first-layer entrances, roof bridges, studs, the mug-handle bridge (5.2 mm) and key relief (0.7 mm) in a real layer preview. Nominal margins: 10 mm between parts and 10 mm at the bed edge. Actual exclusion zones, brim, supports and toolpaths remain unverified.


Stop if: openings close, parts fail to seat, tools or significant force are needed, stress whitening/cracks appear, retention is weak, or parts warp. Do not start with negative clearance. The mug is not for food/drink. Keep small parts away from infants and toddlers.

Finished dimensions / Projections from the real CAD


R1 / FRONT / mm

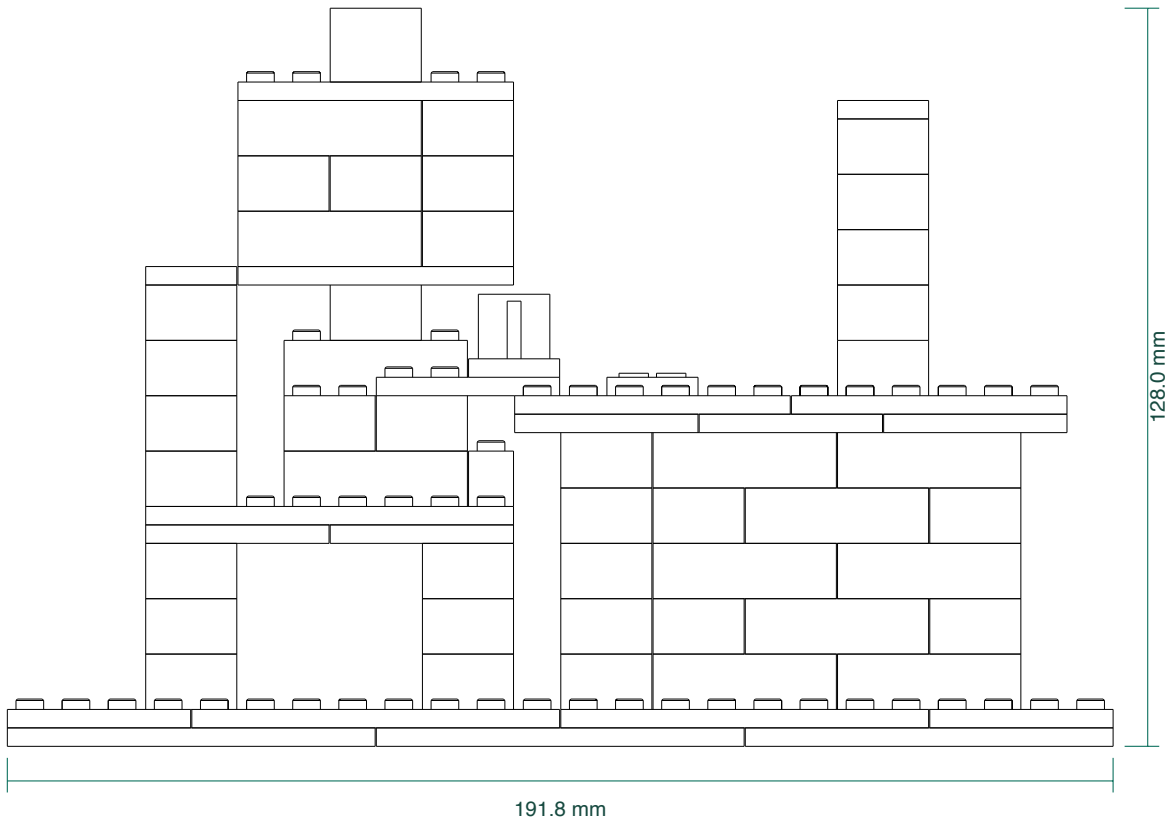

R1 / TOP / mm

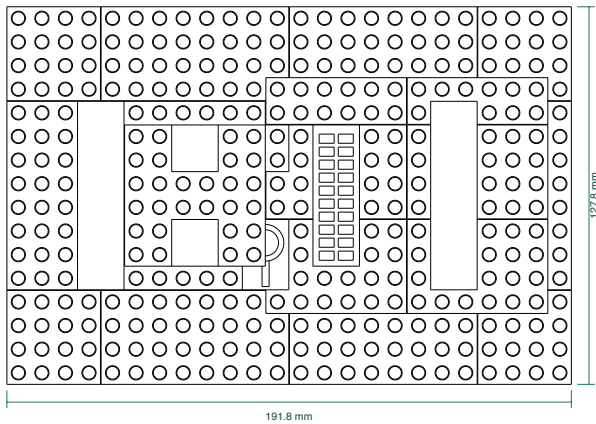


R1 / RIGHT / mm

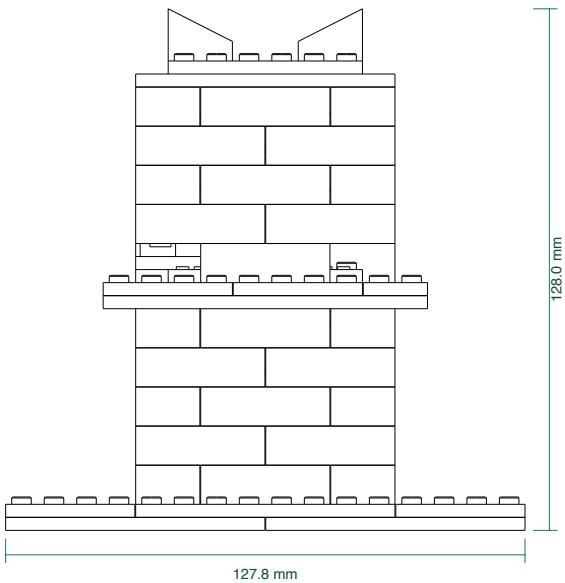


FreeCAD TechDraw hidden-line projections of the BRep. Overall size includes the ears and highest studs. These are dimensions of this independent design, not measurements inferred from the photograph. Base: 191.8×127.8 mm; body thickness: 6.4 mm; including exposed studs: 8.2 mm.

Open underside / Connection sections


B-2x4 / TOP

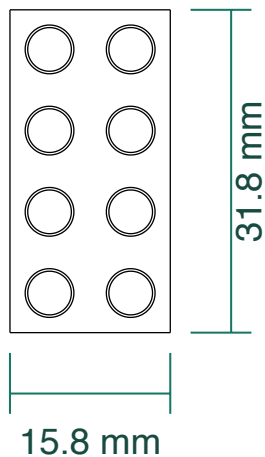

B-2x4 / OPEN BOTTOM

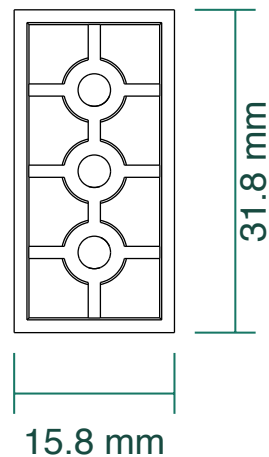


B-2x4 / SECTION Y=4 mm

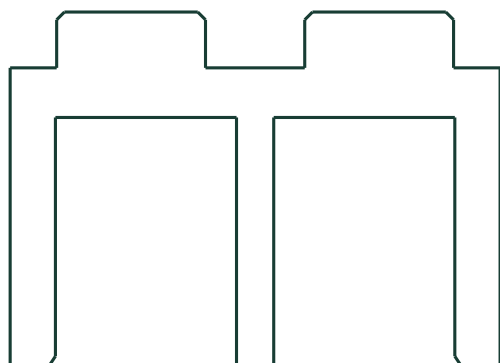

BODY 9.6 / STUD 1.8 / ROOF 1.6 mm

B-2x4 / SECTION Y=8 mm

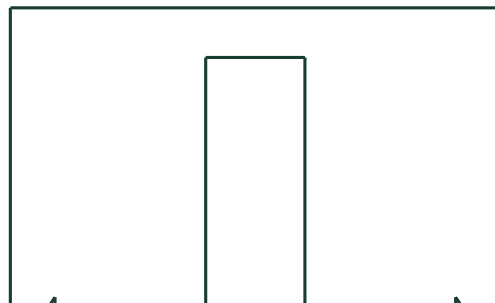

BODY 9.6 / STUD 1.8 / ROOF 1.6 mm

B-2x4 CAD projections and actual planar BRep sections. Body: 15.8x31.8x9.6 mm. Stud diameter: 4.8 mm; stud height: 1.8 mm. Pitch: 8 mm, with centers at 4+8*x*i. Stack bodies at 9.6 or 3.2 mm intervals; do not add stud height to each course.

The underside is an open cavity with a roof, walls, tubes and 1.2 mm ribs. Standard roof: 1.6 mm; plate roof: 1.0 mm; standard outer wall: 1.46 mm; minimum entrance wall: 1.26 mm; tube bore: 3.2 mm. Nominal thin-plate headroom over an inserted stud is 0.4 mm. Nominal clearance does not prove frictional retention.

Bill of materials / Assembly parts only

Type ID / STL name	Color	Quantity	Actual bounds, mm
B-1x2	Black	2	7.8 × 15.8 × 11.4
B-2x2	Light beige	3	15.8 × 15.8 × 11.4
B-2x2	Black	1	15.8 × 15.8 × 11.4
B-2x2	White	30	15.8 × 15.8 × 11.4
B-2x4	Light beige	3	15.8 × 31.8 × 11.4
B-2x4	Black	14	15.8 × 31.8 × 11.4
B-2x4	White	43	15.8 × 31.8 × 11.4
EAR-2x2	Black	2	15.8 × 15.8 × 12.8
KEY-2x6	White	1	15.8 × 47.8 × 3.9
MUG-2x3	Yellow	1	15.8 × 23.8 × 14.4
P-2x4	Black	2	15.8 × 31.8 × 5.0
P-2x6	White	2	15.8 × 47.8 × 5.0
P-4x10	White	3	31.8 × 79.8 × 5.0
P-4x4	Green	4	31.8 × 31.8 × 5.0
P-4x6	White	4	31.8 × 47.8 × 5.0
P-4x8	Green	6	31.8 × 63.8 × 5.0
P-4x8	White	4	31.8 × 63.8 × 5.0
P-6x6	Black	2	47.8 × 47.8 × 5.0
P-8x8	Green	8	63.8 × 63.8 × 5.0
T-2x8	White	2	15.8 × 63.8 × 3.2

Total: 137 parts, 15 production types. The 8 coupon types, representative trials and base-joint trial are separate. One STL file describes a type, not the quantity to print. STL has no unit field; use mm.

Every slot and assembly candidate: data/plate-to-assembly.csv. Reverse mapping: data/print-manifest.json. Positions and rotations: data/instances.csv. The bilingual interactive guide exposes the same mapping. Native object labels and the original CSV role field may retain Japanese; IDs are unchanged.

From a printed file to every assembly location

Production file / example print order	Parts	Color
0-green-01-NOT_SLICED.3mf	10	Green
0-green-02-NOT_SLICED.3mf	8	Green
0-white-01-NOT_SLICED.3mf	19	White
0-white-02-NOT_SLICED.3mf	54	White
0-white-03-NOT_SLICED.3mf	16	White
0-black-01-NOT_SLICED.3mf	23	Black
0-yellow-01-NOT_SLICED.3mf	1	Yellow
0-beige-01-NOT_SLICED.3mf	6	Light beige

Print order is not assembly order. Each step below gives one example slot assignment per instance. Any other slot of the same type and color may be used. The IDs are not physical serial numbers.

Use index.html to follow file → slot → type/color → every candidate instance → step/position/orientation, or instance → every source file/slot. The complete mapping is also in the CSV and manifest.

If the slicer auto-arranges parts, their positions may differ from the supplied plate diagram. Match type, color and quantity. The 8 production 3MF files, BOM, instances and assembly steps all contain the same 137 parts.

Coordinates and orientation


X points from chair to desk, Y from front to back, Z upward. The character faces +X. The photo-like view is from +X/−Y. Tables give the lower corner of the placed footprint; rotations are right-handed about Z. The manifest translation_mm field is the position of the part's local origin.

Insertion and removal

Insert downward from above. Fit the yellow mug before the head. Press large faces from above without levering the parts. Build the chair back, shoulders and neck while access is open. Disassemble in reverse order; remove the head before the mug.

Step 01 / Green base: lower layer

Add 6 parts / insert from above ↓ Arrange six plates on a flat table. They are not yet connected to each other.


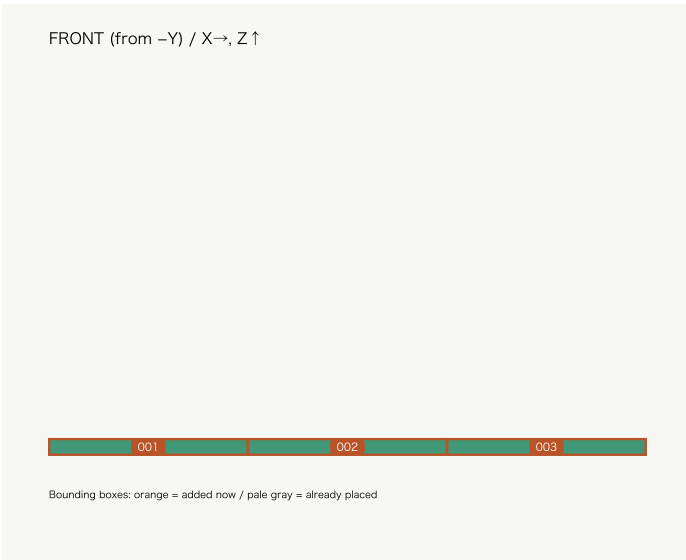


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-001 Lower base	P-8x8 Green	0.0, 0.0, 0.0 Z rotation 0°	O-green-01-NOT_SLICED.3mf slot 1 (example)
O-002 Lower base	P-8x8 Green	64.0, 0.0, 0.0 Z rotation 0°	O-green-01-NOT_SLICED.3mf slot 2 (example)
O-003 Lower base	P-8x8 Green	128.0, 0.0, 0.0 Z rotation 0°	O-green-01-NOT_SLICED.3mf slot 3 (example)
O-004 Lower base	P-8x8 Green	0.0, 64.0, 0.0 Z rotation 0°	O-green-01-NOT_SLICED.3mf slot 4 (example)
O-005 Lower base	P-8x8 Green	64.0, 64.0, 0.0 Z rotation 0°	O-green-01-NOT_SLICED.3mf slot 5 (example)
O-006 Lower base	P-8x8 Green	128.0, 64.0, 0.0 Z rotation 0°	O-green-01-NOT_SLICED.3mf slot 6 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 02 / Green base: offset upper layer

Add 12 parts / insert from above ↓ Bridge the lower-layer seams at X=64/128 and Y=64 mm.

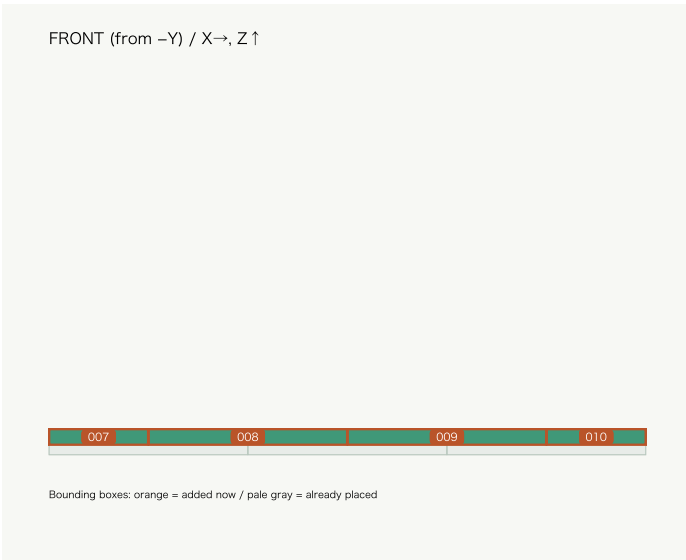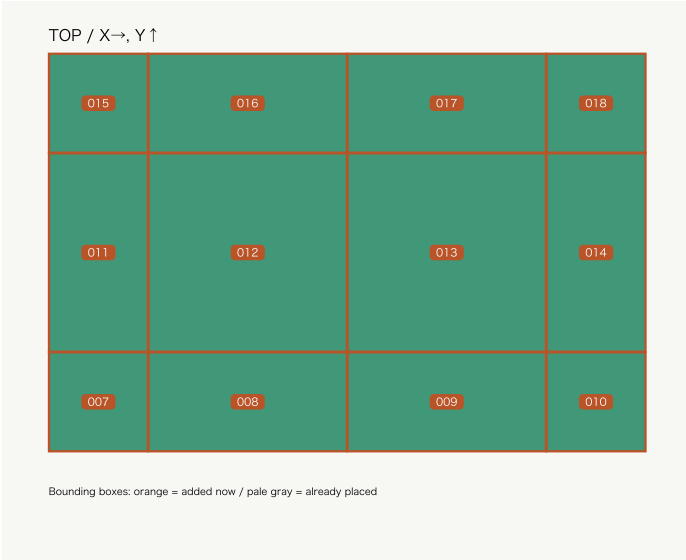


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-007 Upper base	P-4x4 Green	0.0, 0.0, 3.2 Z rotation 0°	O-green-02-NOT_SLICED.3mf slot 5 (example)
O-008 Upper base	P-4x8 Green	32.0, 0.0, 3.2 Z rotation 90°	O-green-01-NOT_SLICED.3mf slot 9 (example)
O-009 Upper base	P-4x8 Green	96.0, 0.0, 3.2 Z rotation 90°	O-green-01-NOT_SLICED.3mf slot 10 (example)
O-010 Upper base	P-4x4 Green	160.0, 0.0, 3.2 Z rotation 0°	O-green-02-NOT_SLICED.3mf slot 6 (example)
O-011 Upper base	P-4x8 Green	0.0, 32.0, 3.2 Z rotation 0°	O-green-02-NOT_SLICED.3mf slot 1 (example)
O-012 Upper base	P-8x8 Green	32.0, 32.0, 3.2 Z rotation 0°	O-green-01-NOT_SLICED.3mf slot 7 (example)
O-013 Upper base	P-8x8 Green	96.0, 32.0, 3.2 Z rotation 0°	O-green-01-NOT_SLICED.3mf slot 8 (example)
O-014 Upper base	P-4x8 Green	160.0, 32.0, 3.2 Z rotation 0°	O-green-02-NOT_SLICED.3mf slot 2 (example)
O-015 Upper base	P-4x4 Green	0.0, 96.0, 3.2 Z rotation 0°	O-green-02-NOT_SLICED.3mf slot 7 (example)
O-016 Upper base	P-4x8 Green	32.0, 96.0, 3.2 Z rotation 90°	O-green-02-NOT_SLICED.3mf slot 3 (example)
O-017 Upper base	P-4x8 Green	96.0, 96.0, 3.2 Z rotation 90°	O-green-02-NOT_SLICED.3mf slot 4 (example)
O-018 Upper base	P-4x4 Green	160.0, 96.0, 3.2 Z rotation 0°	O-green-02-NOT_SLICED.3mf slot 8 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 03 / Chair legs: course 1

Add 4 parts / insert from above ↓


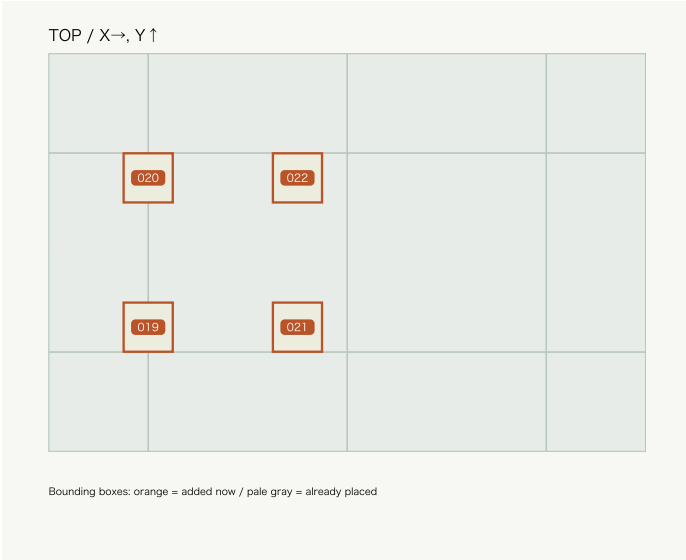


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-019 Chair leg	B-2x2 White	24.0, 32.0, 6.4 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 41 (example)
O-020 Chair leg	B-2x2 White	24.0, 80.0, 6.4 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 42 (example)
O-021 Chair leg	B-2x2 White	72.0, 32.0, 6.4 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 43 (example)
O-022 Chair leg	B-2x2 White	72.0, 80.0, 6.4 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 44 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 04 / Chair legs: course 2

Add 4 parts / insert from above ↓

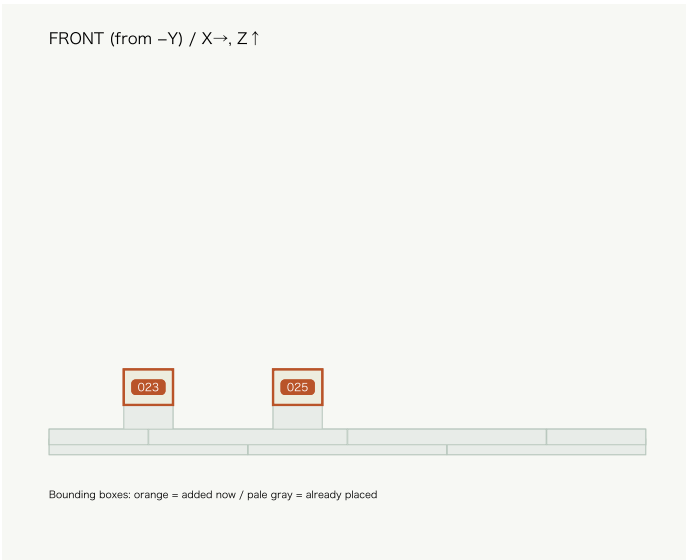
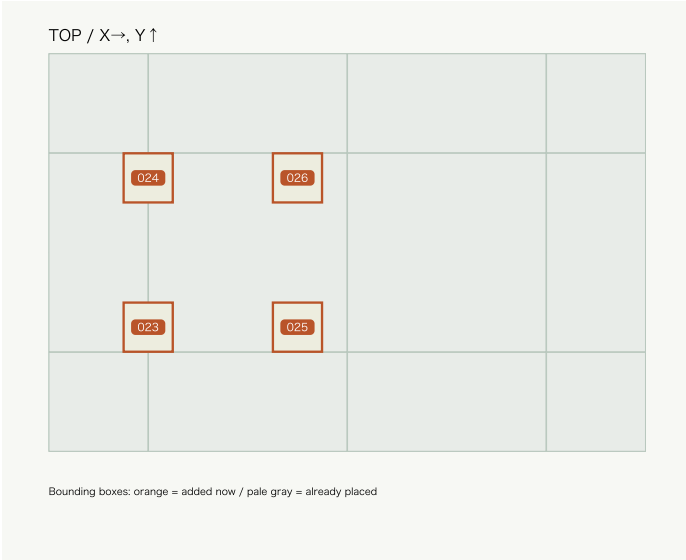


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-023 Chair leg	B-2x2 White	24.0, 32.0, 16.0 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 45 (example)
O-024 Chair leg	B-2x2 White	24.0, 80.0, 16.0 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 46 (example)
O-025 Chair leg	B-2x2 White	72.0, 32.0, 16.0 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 47 (example)
O-026 Chair leg	B-2x2 White	72.0, 80.0, 16.0 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 48 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 05 / Chair legs: course 3

Add 4 parts / insert from above ↓

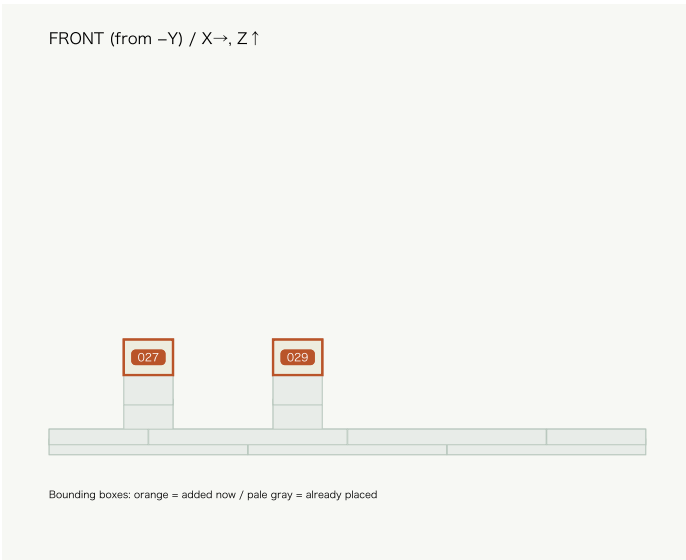
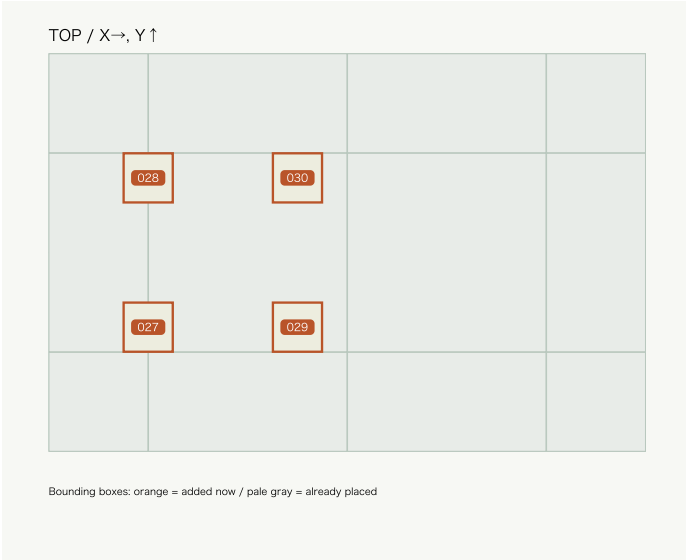


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-027 Chair leg	B-2x2 White	24.0, 32.0, 25.6 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 49 (example)
O-028 Chair leg	B-2x2 White	24.0, 80.0, 25.6 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 50 (example)
O-029 Chair leg	B-2x2 White	72.0, 32.0, 25.6 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 51 (example)
O-030 Chair leg	B-2x2 White	72.0, 80.0, 25.6 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 52 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 06 / Desk supports: course 1

Add 8 parts / insert from above ↓ Build the hollow right pedestal and two left legs. Cross the seams of the preceding course.

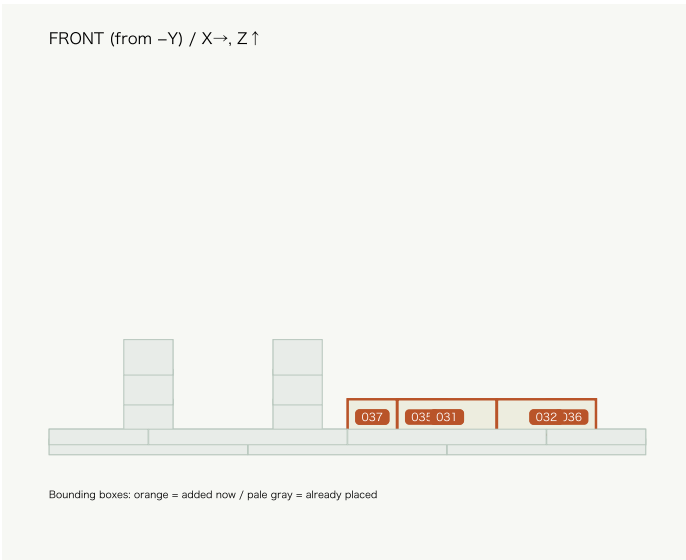
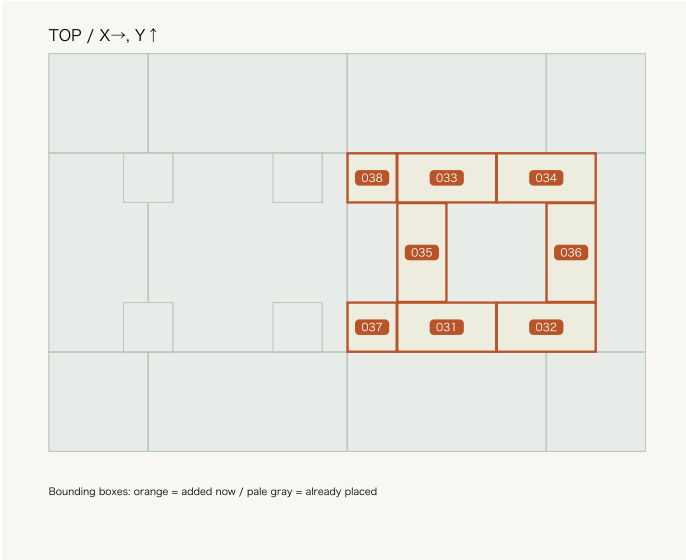


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-031 Hollow desk pedestal	B-2x4 White	112.0, 32.0, 6.4 Z rotation 90°	O-white-01-NOT_SLICED.3mf slot 17 (example)
O-032 Hollow desk pedestal	B-2x4 White	144.0, 32.0, 6.4 Z rotation 90°	O-white-01-NOT_SLICED.3mf slot 18 (example)
O-033 Hollow desk pedestal	B-2x4 White	112.0, 80.0, 6.4 Z rotation 90°	O-white-01-NOT_SLICED.3mf slot 19 (example)
O-034 Hollow desk pedestal	B-2x4 White	144.0, 80.0, 6.4 Z rotation 90°	O-white-02-NOT_SLICED.3mf slot 1 (example)
O-035 Hollow desk pedestal	B-2x4 White	112.0, 48.0, 6.4 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 2 (example)
O-036 Hollow desk pedestal	B-2x4 White	160.0, 48.0, 6.4 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 3 (example)
O-037 Left desk leg	B-2x2 White	96.0, 32.0, 6.4 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 53 (example)
O-038 Left desk leg	B-2x2 White	96.0, 80.0, 6.4 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 54 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 07 / Desk supports: course 2

Add 8 parts / insert from above ↓ Build the hollow right pedestal and two left legs. Cross the seams of the preceding course.

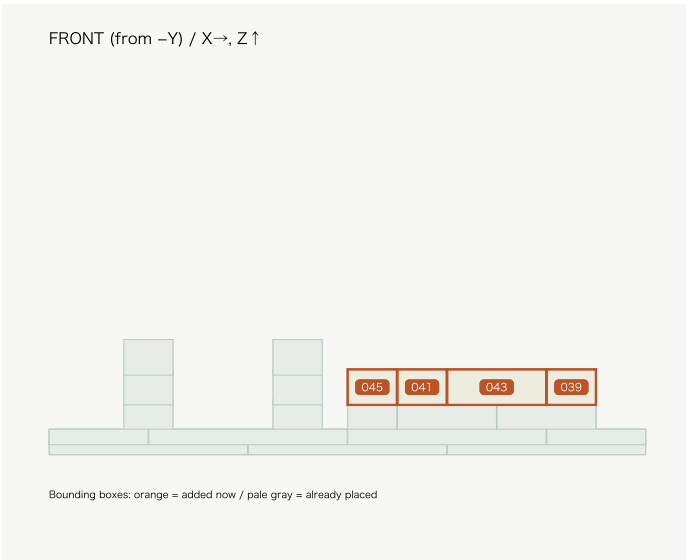
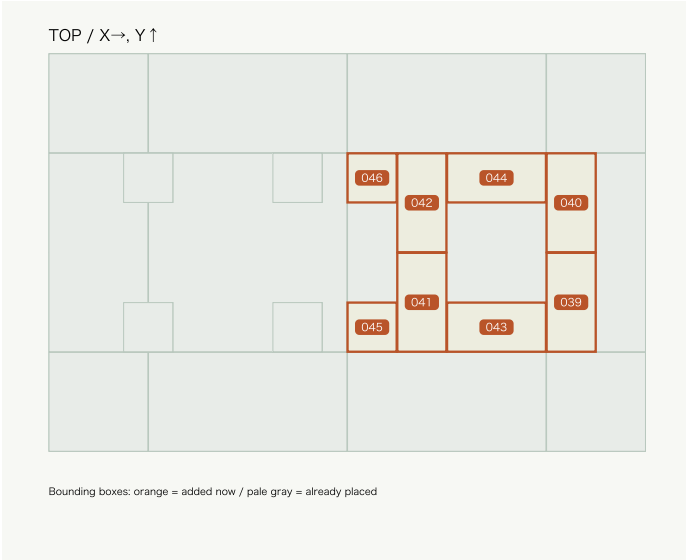


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-039 Hollow desk pedestal	B-2x4 White	160.0, 32.0, 16.0 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 4 (example)
O-040 Hollow desk pedestal	B-2x4 White	160.0, 64.0, 16.0 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 5 (example)
O-041 Hollow desk pedestal	B-2x4 White	112.0, 32.0, 16.0 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 6 (example)
O-042 Hollow desk pedestal	B-2x4 White	112.0, 64.0, 16.0 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 7 (example)
O-043 Hollow desk pedestal	B-2x4 White	128.0, 32.0, 16.0 Z rotation 90°	O-white-02-NOT_SLICED.3mf slot 8 (example)
O-044 Hollow desk pedestal	B-2x4 White	128.0, 80.0, 16.0 Z rotation 90°	O-white-02-NOT_SLICED.3mf slot 9 (example)
O-045 Left desk leg	B-2x2 White	96.0, 32.0, 16.0 Z rotation 0°	O-white-03-NOT_SLICED.3mf slot 1 (example)
O-046 Left desk leg	B-2x2 White	96.0, 80.0, 16.0 Z rotation 0°	O-white-03-NOT_SLICED.3mf slot 2 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 08 / Desk supports: course 3

Add 8 parts / insert from above ↓ Build the hollow right pedestal and two left legs. Cross the seams of the preceding course.

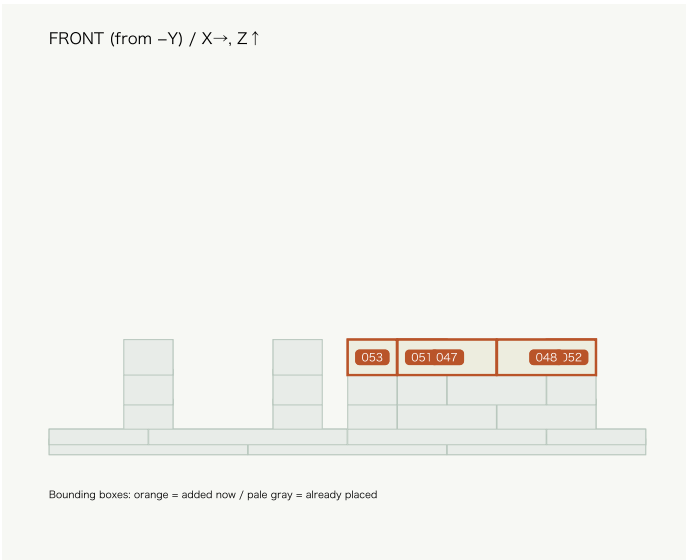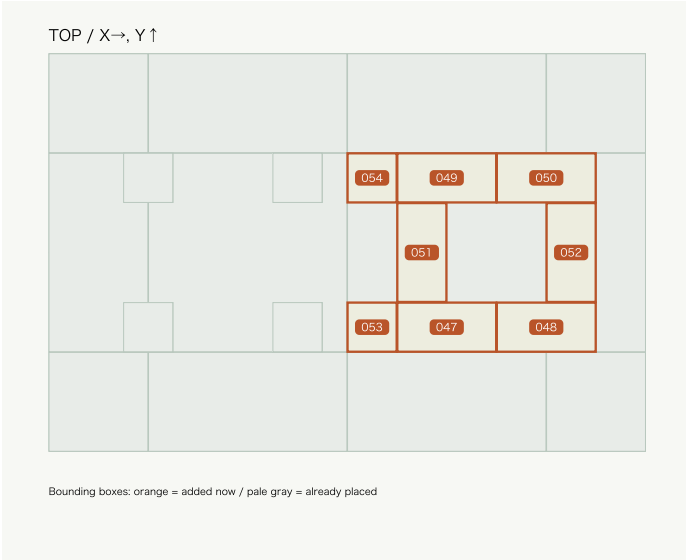


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-047 Hollow desk pedestal	B-2x4 White	112.0, 32.0, 25.6 Z rotation 90°	O-white-02-NOT_SLICED.3mf slot 10 (example)
O-048 Hollow desk pedestal	B-2x4 White	144.0, 32.0, 25.6 Z rotation 90°	O-white-02-NOT_SLICED.3mf slot 11 (example)
O-049 Hollow desk pedestal	B-2x4 White	112.0, 80.0, 25.6 Z rotation 90°	O-white-02-NOT_SLICED.3mf slot 12 (example)
O-050 Hollow desk pedestal	B-2x4 White	144.0, 80.0, 25.6 Z rotation 90°	O-white-02-NOT_SLICED.3mf slot 13 (example)
O-051 Hollow desk pedestal	B-2x4 White	112.0, 48.0, 25.6 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 14 (example)
O-052 Hollow desk pedestal	B-2x4 White	160.0, 48.0, 25.6 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 15 (example)
O-053 Left desk leg	B-2x2 White	96.0, 32.0, 25.6 Z rotation 0°	O-white-03-NOT_SLICED.3mf slot 3 (example)
O-054 Left desk leg	B-2x2 White	96.0, 80.0, 25.6 Z rotation 0°	O-white-03-NOT_SLICED.3mf slot 4 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

TOP / $X \rightarrow$, $Y \uparrow$



Bounding boxes: orange = added now / pale gray = already placed

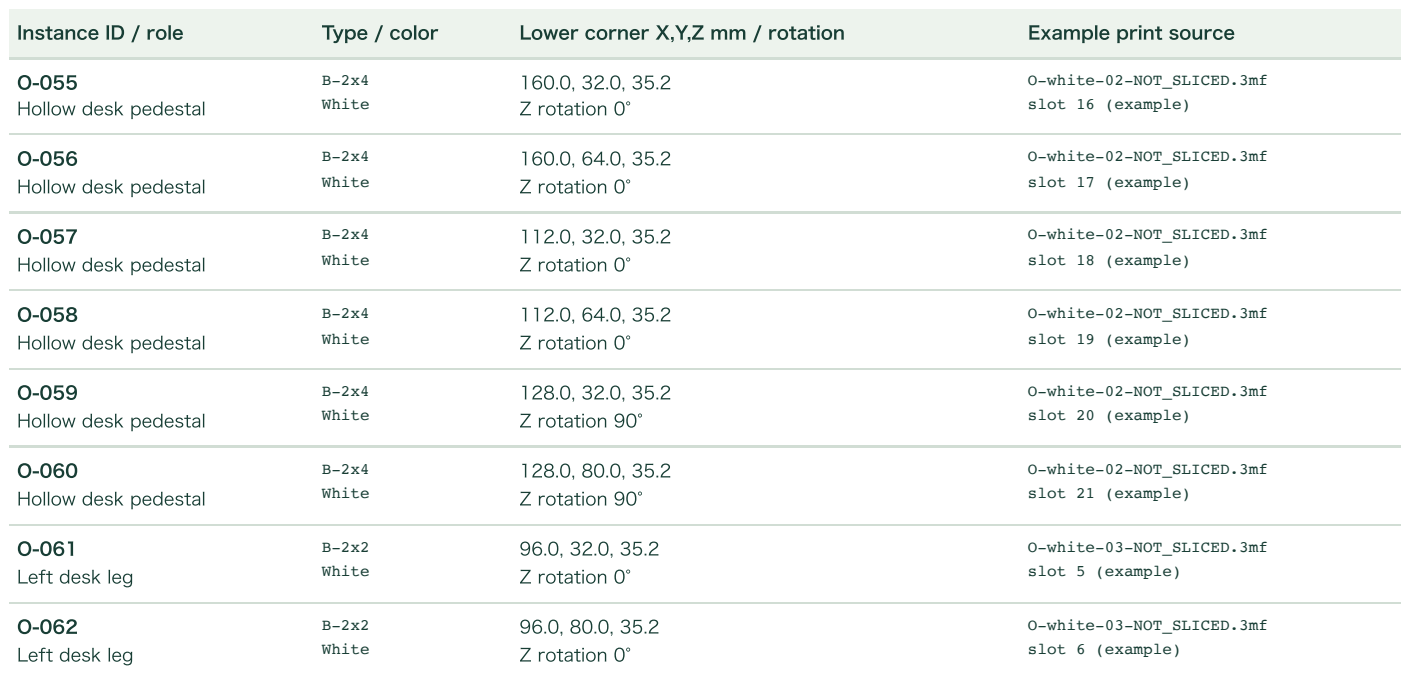

15 / Units: mm. Printed scale may vary. Physically untested. Reference photo and logos not included.

Step 10 / Desk supports: course 5

Add 8 parts / insert from above ↓ Build the hollow right pedestal and two left legs. Cross the seams of the preceding course.

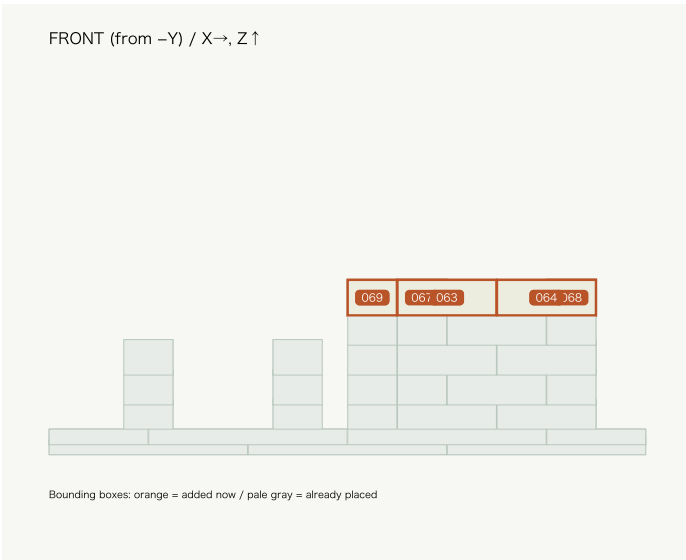
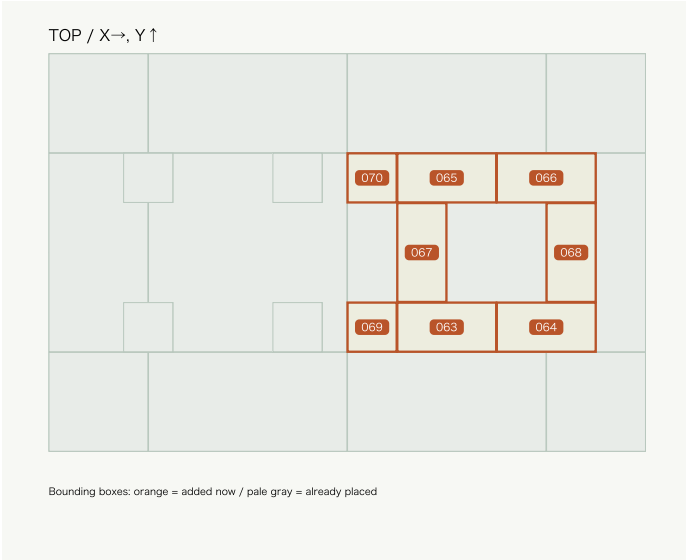


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-063 Hollow desk pedestal	B-2x4 White	112.0, 32.0, 44.8 Z rotation 90°	O-white-02-NOT_SLICED.3mf slot 22 (example)
O-064 Hollow desk pedestal	B-2x4 White	144.0, 32.0, 44.8 Z rotation 90°	O-white-02-NOT_SLICED.3mf slot 23 (example)
O-065 Hollow desk pedestal	B-2x4 White	112.0, 80.0, 44.8 Z rotation 90°	O-white-02-NOT_SLICED.3mf slot 24 (example)
O-066 Hollow desk pedestal	B-2x4 White	144.0, 80.0, 44.8 Z rotation 90°	O-white-02-NOT_SLICED.3mf slot 25 (example)
O-067 Hollow desk pedestal	B-2x4 White	112.0, 48.0, 44.8 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 26 (example)
O-068 Hollow desk pedestal	B-2x4 White	160.0, 48.0, 44.8 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 27 (example)
O-069 Left desk leg	B-2x2 White	96.0, 32.0, 44.8 Z rotation 0°	O-white-03-NOT_SLICED.3mf slot 7 (example)
O-070 Left desk leg	B-2x2 White	96.0, 80.0, 44.8 Z rotation 0°	O-white-03-NOT_SLICED.3mf slot 8 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 11 / Chair seat: lower layer

Add 2 parts / insert from above ↓

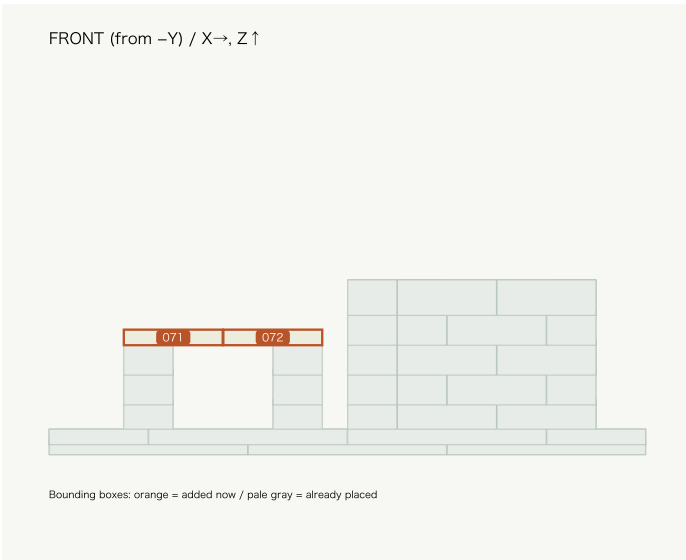
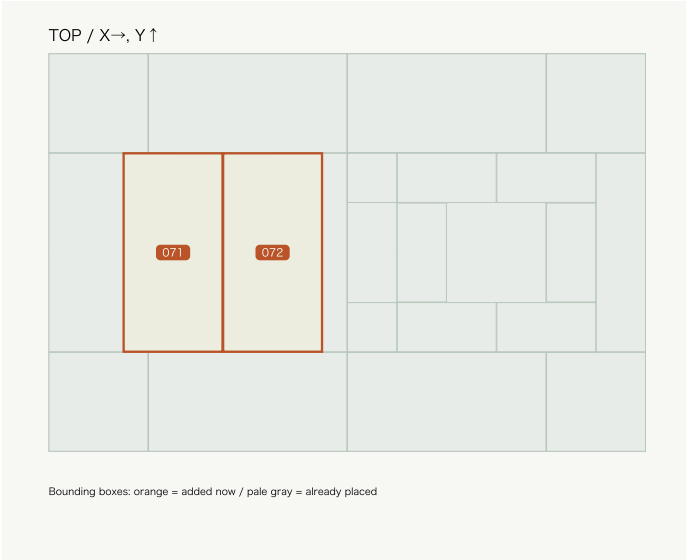


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-071 Lower seat	P-4x8 White	24.0, 32.0, 35.2 Z rotation 0°	O-white-01-NOT_SLICED.3mf slot 4 (example)
O-072 Lower seat	P-4x8 White	56.0, 32.0, 35.2 Z rotation 0°	O-white-01-NOT_SLICED.3mf slot 5 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 12 / Chair seat: upper layer

Add 2 parts / insert from above ↓

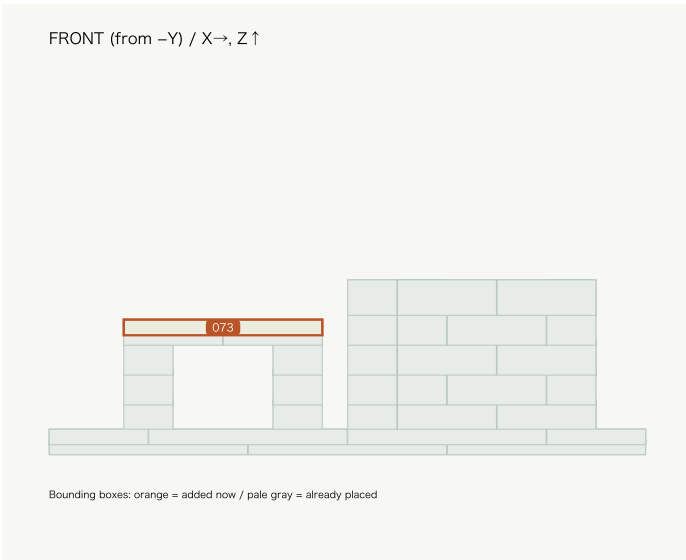
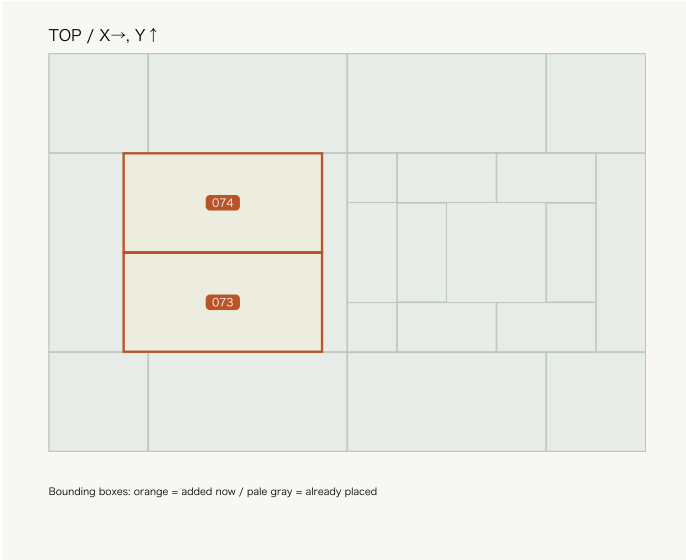


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-073 Upper seat	P-4x8 White	24.0, 32.0, 38.4 Z rotation 90°	O-white-01-NOT_SLICED.3mf slot 6 (example)
O-074 Upper seat	P-4x8 White	24.0, 64.0, 38.4 Z rotation 90°	O-white-01-NOT_SLICED.3mf slot 7 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 13 / White chair back: course 1

Add 2 parts / insert from above ↓

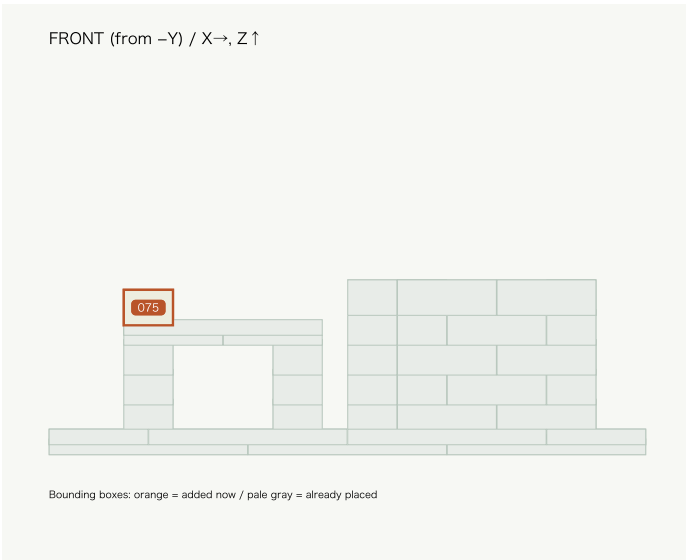
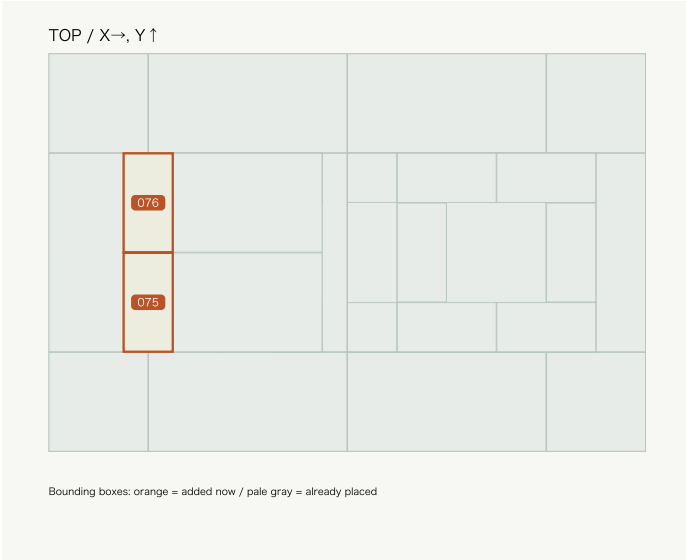


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-075 Chair back	B-2x4 White	24.0, 32.0, 41.6 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 28 (example)
O-076 Chair back	B-2x4 White	24.0, 64.0, 41.6 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 29 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 14 / White chair back: course 2

Add 3 parts / insert from above ↓

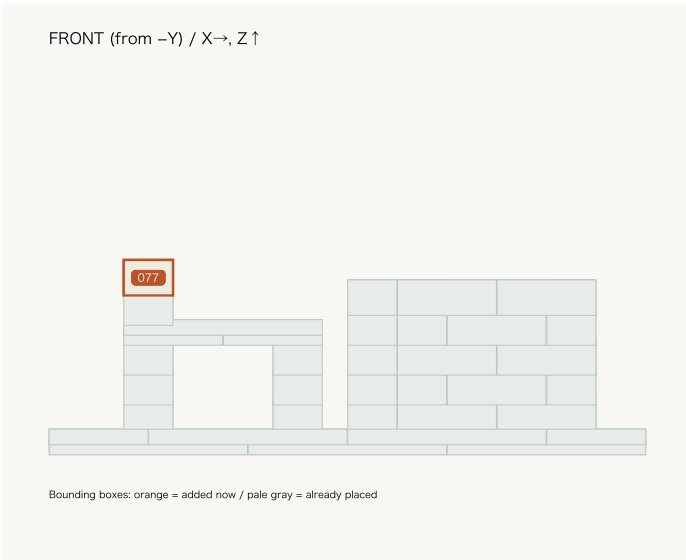
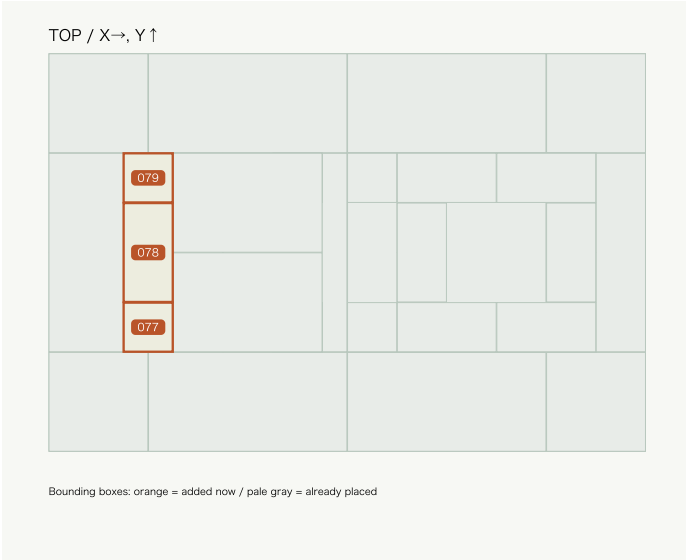


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-077 Chair back	B-2x2 White	24.0, 32.0, 51.2 Z rotation 0°	O-white-03-NOT_SLICED.3mf slot 9 (example)
O-078 Chair back	B-2x4 White	24.0, 48.0, 51.2 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 30 (example)
O-079 Chair back	B-2x2 White	24.0, 80.0, 51.2 Z rotation 0°	O-white-03-NOT_SLICED.3mf slot 10 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 15 / White chair back: course 3

Add 2 parts / insert from above ↓

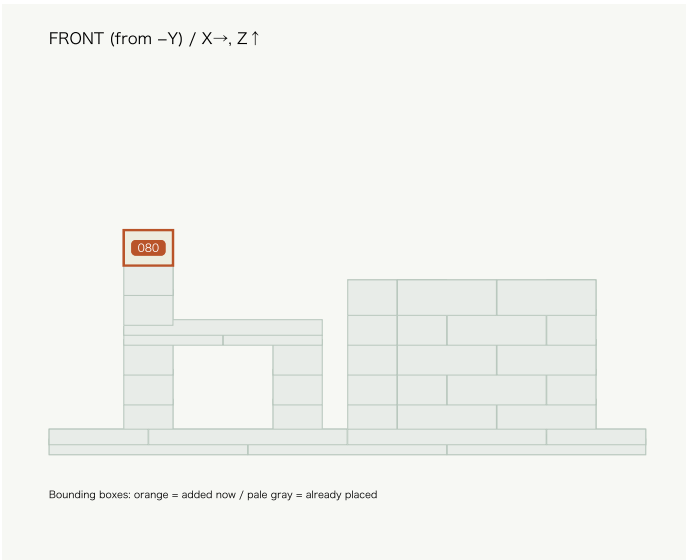
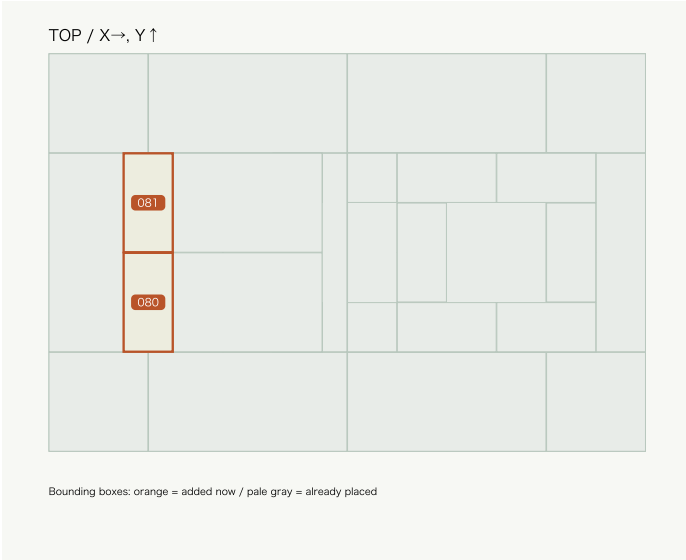


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-080 Chair back	B-2x4 White	24.0, 32.0, 60.8 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 31 (example)
O-081 Chair back	B-2x4 White	24.0, 64.0, 60.8 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 32 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 16 / White chair back: course 4

Add 3 parts / insert from above ↓

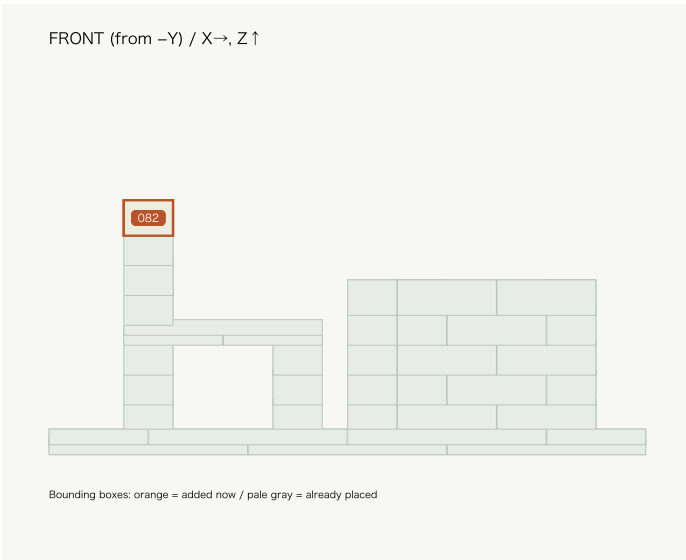
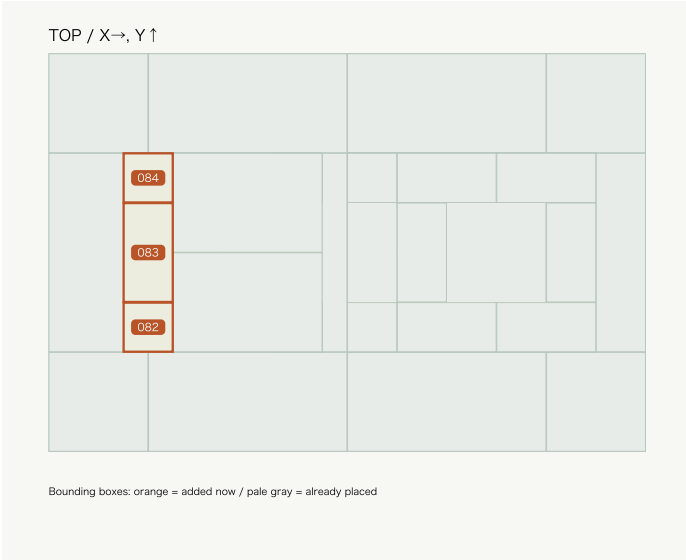


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-082 Chair back	B-2x2 White	24.0, 32.0, 70.4 Z rotation 0°	O-white-03-NOT_SLICED.3mf slot 11 (example)
O-083 Chair back	B-2x4 White	24.0, 48.0, 70.4 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 33 (example)
O-084 Chair back	B-2x2 White	24.0, 80.0, 70.4 Z rotation 0°	O-white-03-NOT_SLICED.3mf slot 12 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 17 / Cap the chair back

Add 1 part / insert from above ↓

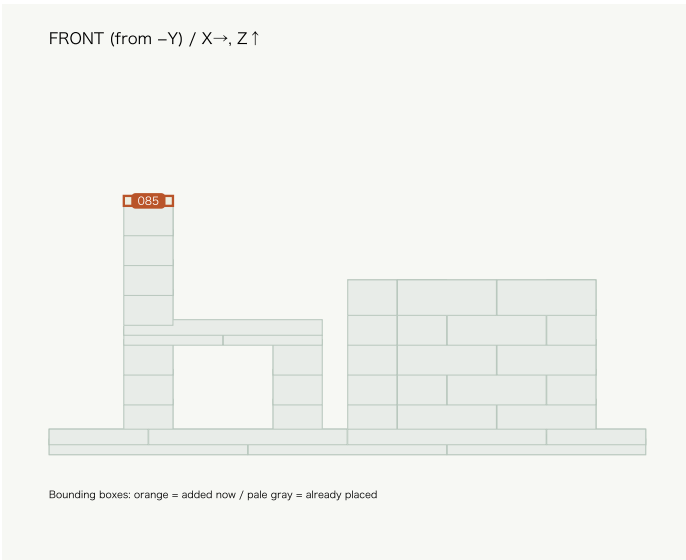
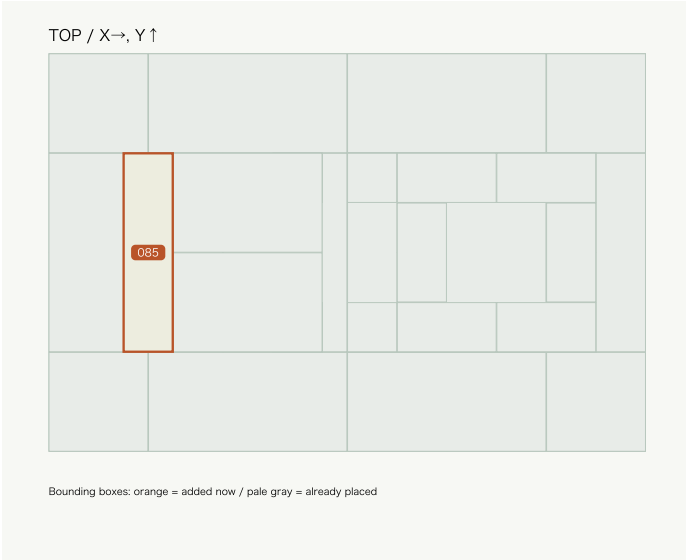


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-085 Chair-back cap	T-2x8 White	24.0, 32.0, 80.0 Z rotation 0°	O-white-01-NOT_SLICED.3mf slot 8 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 18 / Seated character: feet and lower torso

Add 4 parts / insert from above ↓

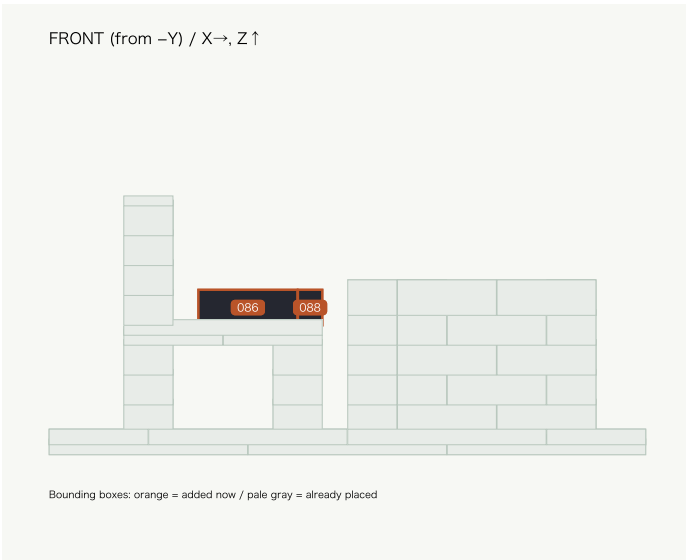
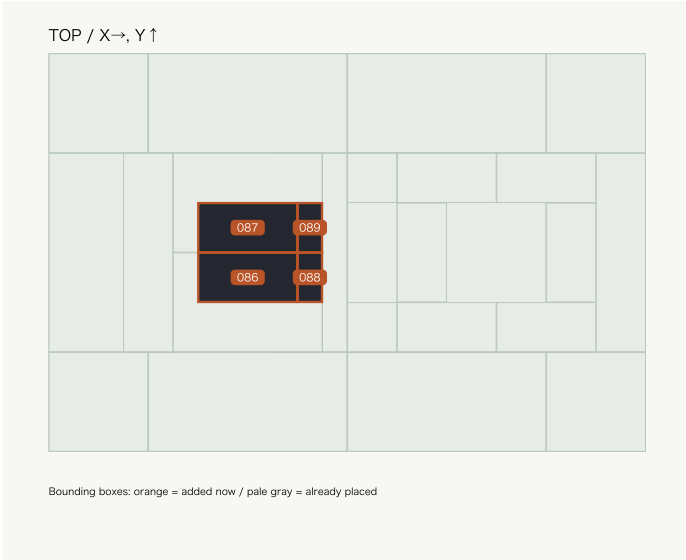


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-086 Lower torso	B-2x4 Black	48.0, 48.0, 41.6 Z rotation 90°	O-black-01-NOT_SLICED.3mf slot 3 (example)
O-087 Lower torso	B-2x4 Black	48.0, 64.0, 41.6 Z rotation 90°	O-black-01-NOT_SLICED.3mf slot 4 (example)
O-088 Foot	B-1x2 Black	80.0, 48.0, 41.6 Z rotation 0°	O-black-01-NOT_SLICED.3mf slot 22 (example)
O-089 Foot	B-1x2 Black	80.0, 64.0, 41.6 Z rotation 0°	O-black-01-NOT_SLICED.3mf slot 23 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 19 / Character: upper torso

Add 2 parts / insert from above ↓

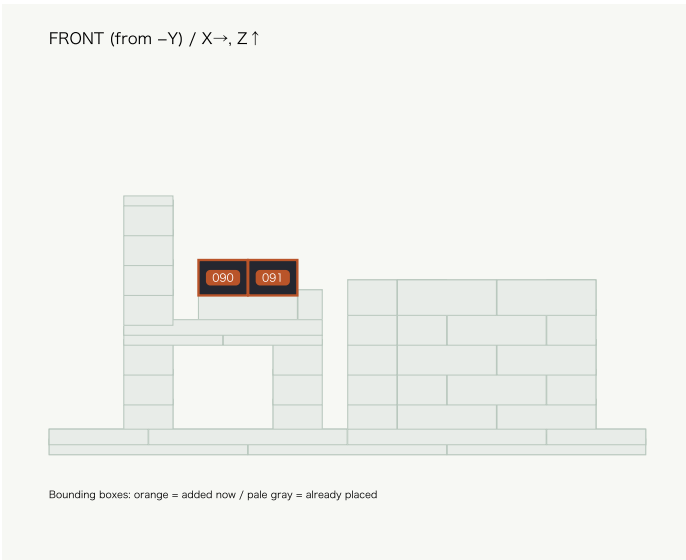
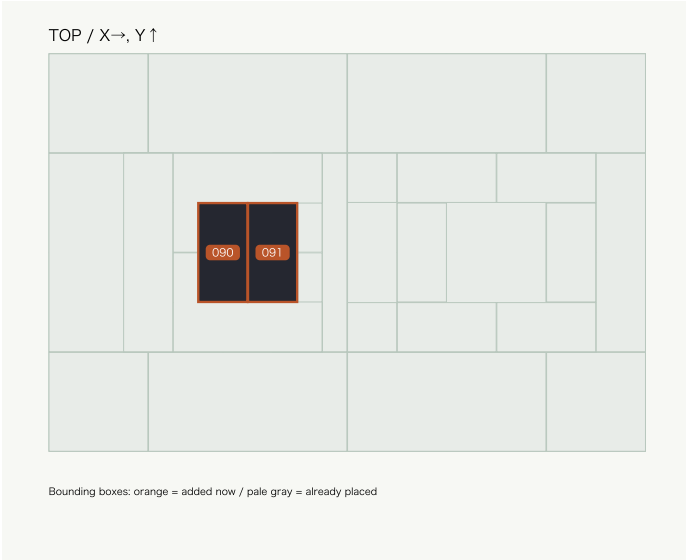


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-090 Upper torso	B-2x4 Black	48.0, 48.0, 51.2 Z rotation 0°	O-black-01-NOT_SLICED.3mf slot 5 (example)
O-091 Upper torso	B-2x4 Black	64.0, 48.0, 51.2 Z rotation 0°	O-black-01-NOT_SLICED.3mf slot 6 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 20 / Desktop: lower layer

Add 3 parts / insert from above ↓ Each plate is supported by the legs. Add the upper layer next to connect all three lower plates.

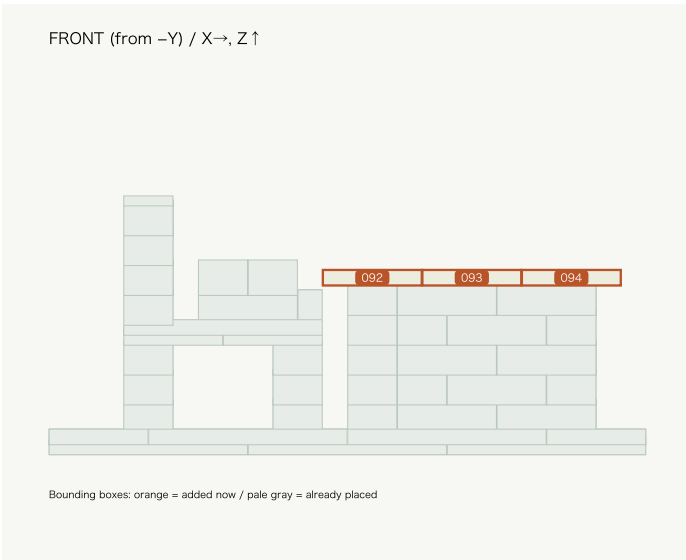
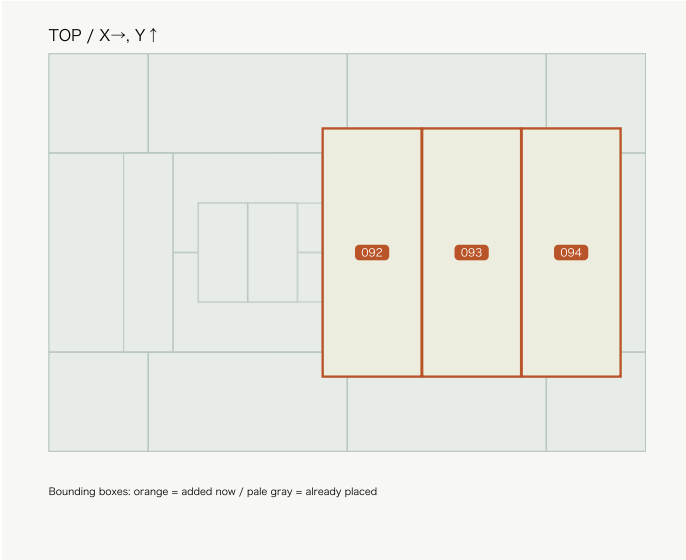


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-092 Lower desktop	P-4x10 White	88.0, 24.0, 54.4 Z rotation 0°	O-white-01-NOT_SLICED.3mf slot 1 (example)
O-093 Lower desktop	P-4x10 White	120.0, 24.0, 54.4 Z rotation 0°	O-white-01-NOT_SLICED.3mf slot 2 (example)
O-094 Lower desktop	P-4x10 White	152.0, 24.0, 54.4 Z rotation 0°	O-white-01-NOT_SLICED.3mf slot 3 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 21 / Desktop: upper layer

Add 6 parts / insert from above ↓ Offset and cross the seams of the lower layer.

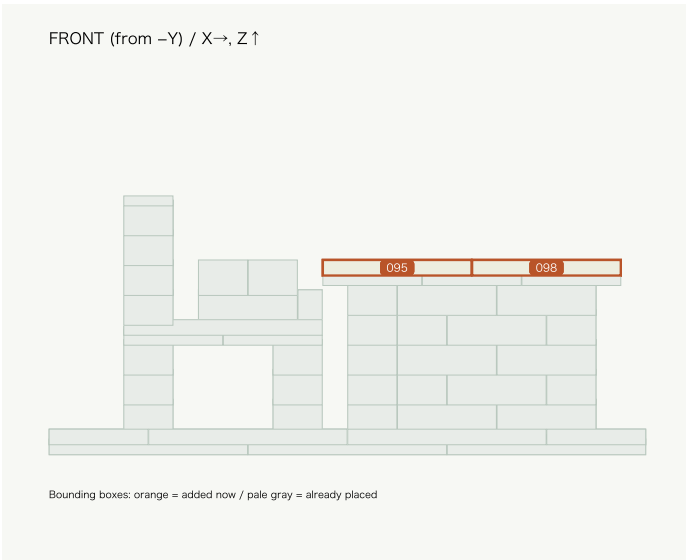
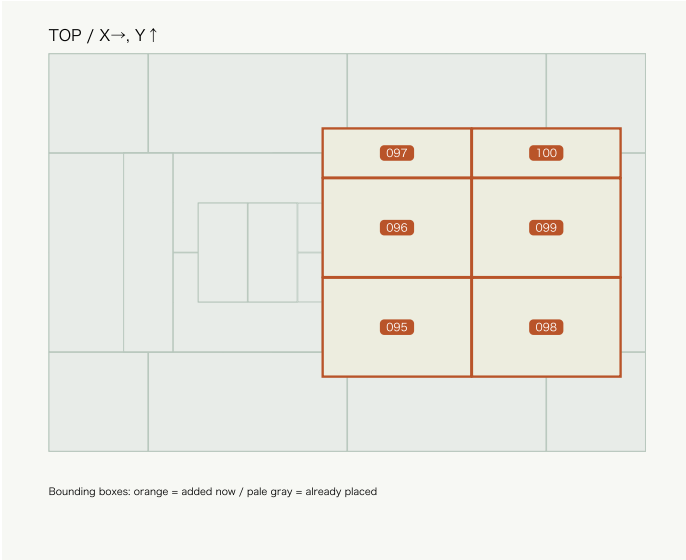


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-095 Upper desktop	P-4x6 White	88.0, 24.0, 57.6 Z rotation 90°	O-white-01-NOT_SLICED.3mf slot 10 (example)
O-096 Upper desktop	P-4x6 White	88.0, 56.0, 57.6 Z rotation 90°	O-white-01-NOT_SLICED.3mf slot 11 (example)
O-097 Upper desktop	P-2x6 White	88.0, 88.0, 57.6 Z rotation 90°	O-white-01-NOT_SLICED.3mf slot 14 (example)
O-098 Upper desktop	P-4x6 White	136.0, 24.0, 57.6 Z rotation 90°	O-white-01-NOT_SLICED.3mf slot 12 (example)
O-099 Upper desktop	P-4x6 White	136.0, 56.0, 57.6 Z rotation 90°	O-white-01-NOT_SLICED.3mf slot 13 (example)
O-100 Upper desktop	P-2x6 White	136.0, 88.0, 57.6 Z rotation 90°	O-white-01-NOT_SLICED.3mf slot 15 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 22 / Arms reaching toward the desk

Add 2 parts / insert from above ↓ These plates bridge the torso and desk. Both supporting top surfaces are at Z=60.8 mm.

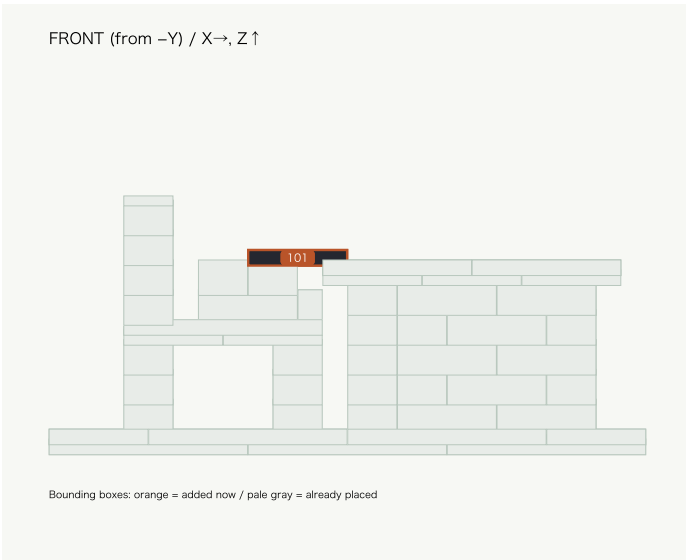
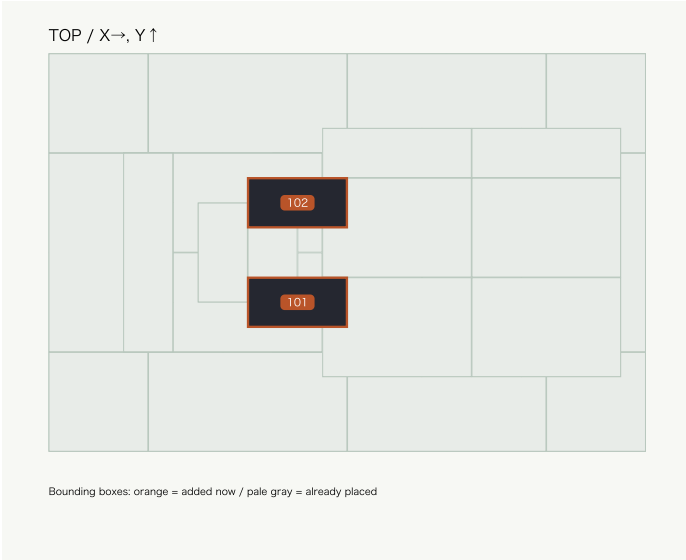


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-101 Arm	P-2x4 Black	64.0, 40.0, 60.8 Z rotation 90°	O-black-01-NOT_SLICED.3mf slot 7 (example)
O-102 Arm	P-2x4 Black	64.0, 72.0, 60.8 Z rotation 90°	O-black-01-NOT_SLICED.3mf slot 8 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 23 / Shoulders and neck

Add 2 parts / insert from above ↓

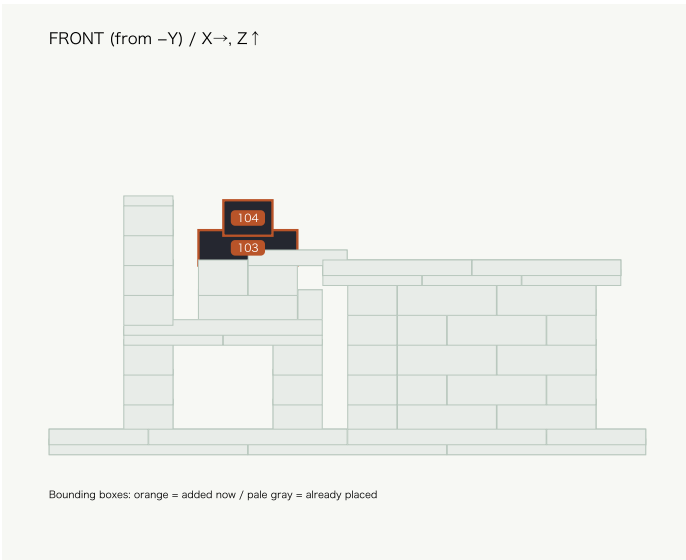
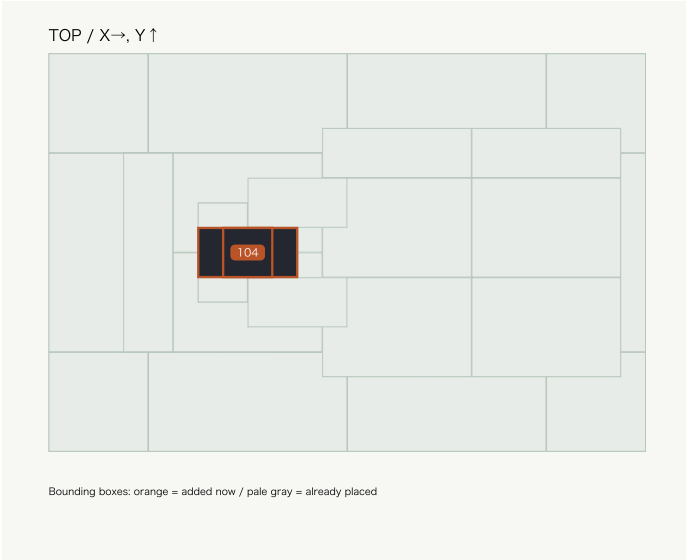


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-103 Shoulders	B-2x4 Black	48.0, 56.0, 60.8 Z rotation 90°	O-black-01-NOT_SLICED.3mf slot 9 (example)
O-104 Neck	B-2x2 Black	56.0, 56.0, 70.4 Z rotation 0°	O-black-01-NOT_SLICED.3mf slot 19 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 24 / Attach the yellow mug

Add 1 part / insert from above ↓ Insert the mug before attaching the head. Remove the head first when taking the mug off. Not for food or drink.

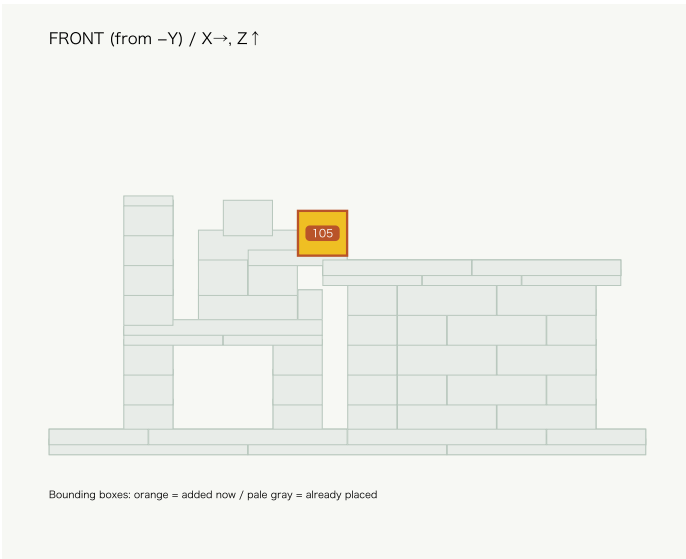
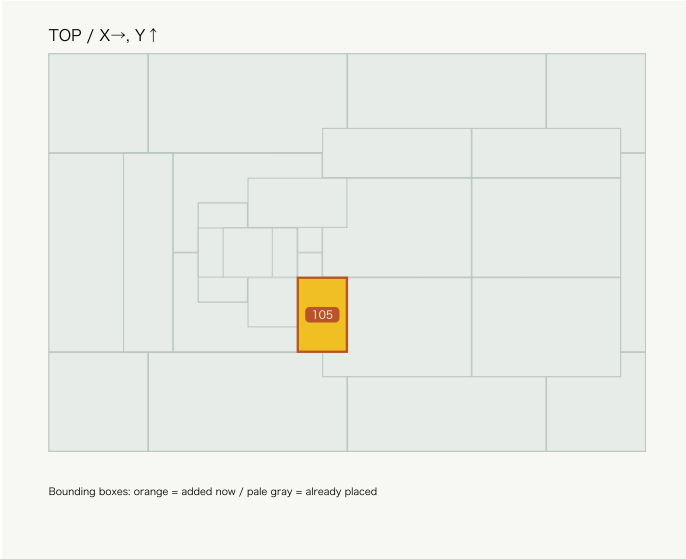


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-105 Mug	MUG-2x3 Yellow	80.0, 32.0, 64.0 Z rotation 0°	O-yellow-01-NOT_SLICED.3mf slot 1 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 25 / Black lower head rim

Add 1 part / insert from above ↓ Attach to the four neck studs. This plate extends over the mug, so do not change the order.

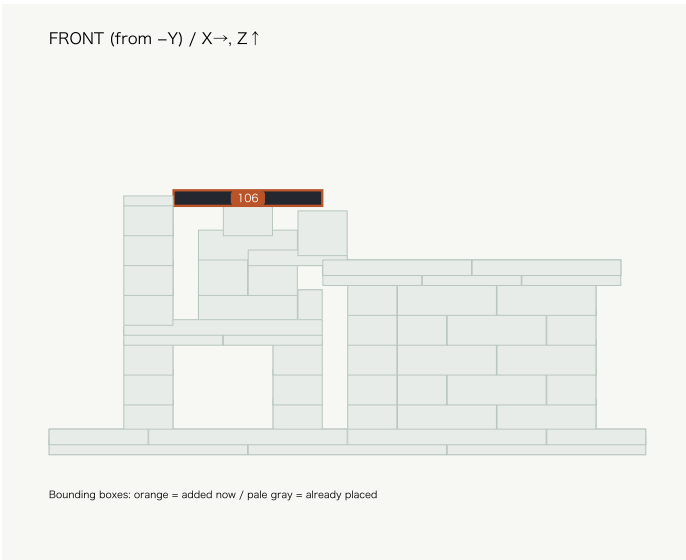
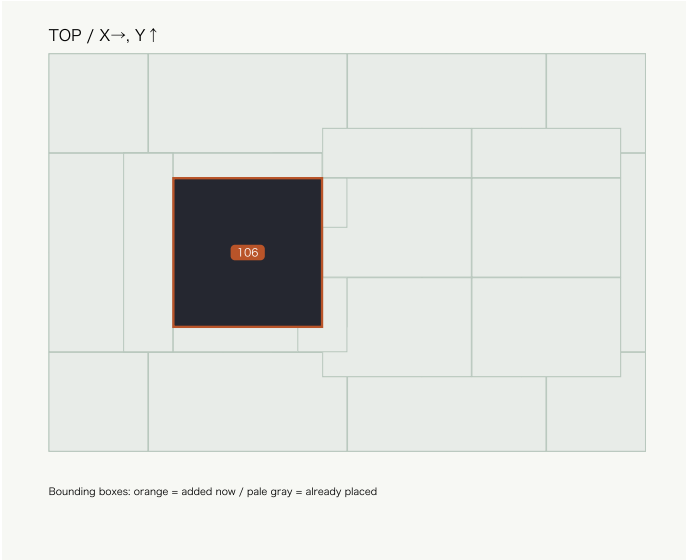


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-106 Lower head rim	P-6x6 Black	40.0, 40.0, 80.0 Z rotation 0°	O-black-01-NOT_SLICED.3mf slot 1 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 26 / Square head and beige face: course 1

Add 5 parts / insert from above ↓ The face points toward +X, toward the desk. There are no eyes, goggles or logos.

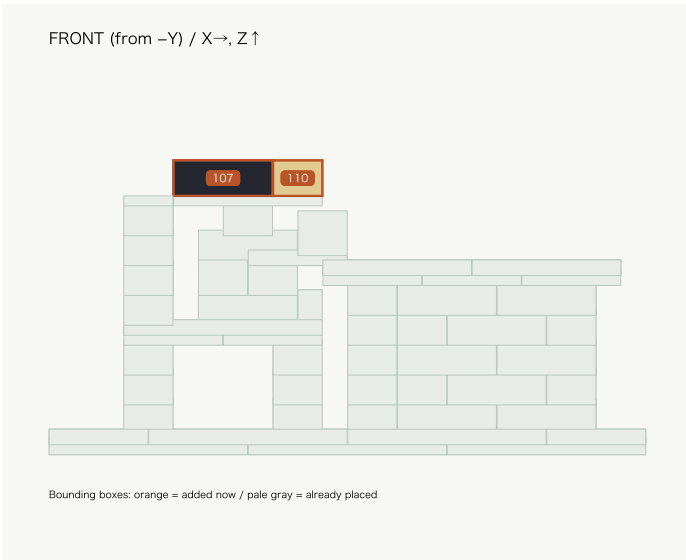
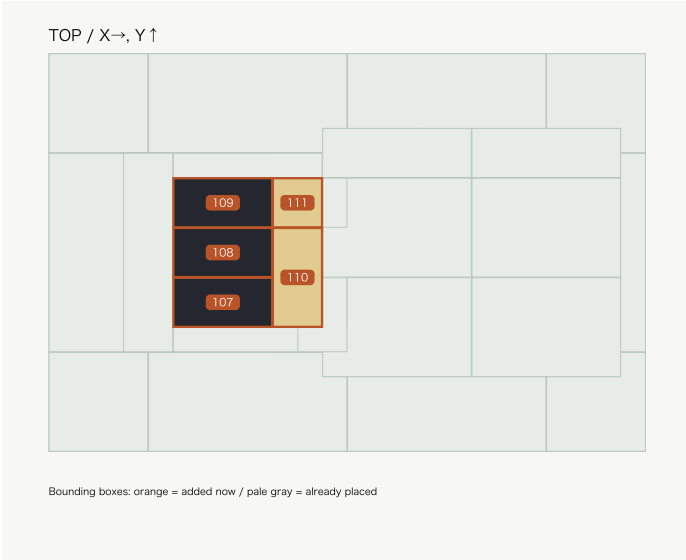


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-107 Rear of head	B-2x4 Black	40.0, 40.0, 83.2 Z rotation 90°	O-black-01-NOT_SLICED.3mf slot 10 (example)
O-108 Rear of head	B-2x4 Black	40.0, 56.0, 83.2 Z rotation 90°	O-black-01-NOT_SLICED.3mf slot 11 (example)
O-109 Rear of head	B-2x4 Black	40.0, 72.0, 83.2 Z rotation 90°	O-black-01-NOT_SLICED.3mf slot 12 (example)
O-110 Face	B-2x4 Light beige	72.0, 40.0, 83.2 Z rotation 0°	O-beige-01-NOT_SLICED.3mf slot 1 (example)
O-111 Face	B-2x2 Light beige	72.0, 72.0, 83.2 Z rotation 0°	O-beige-01-NOT_SLICED.3mf slot 4 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 27 / Square head and beige face: course 2

Add 5 parts / insert from above ↓ The face points toward +X, toward the desk. There are no eyes, goggles or logos.

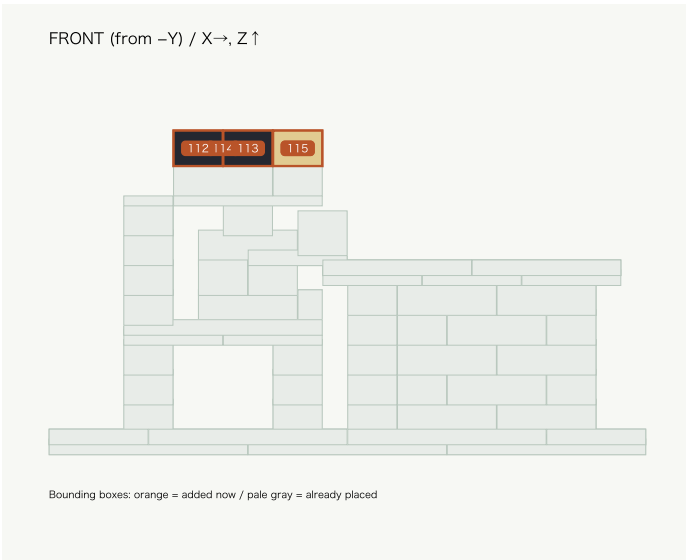
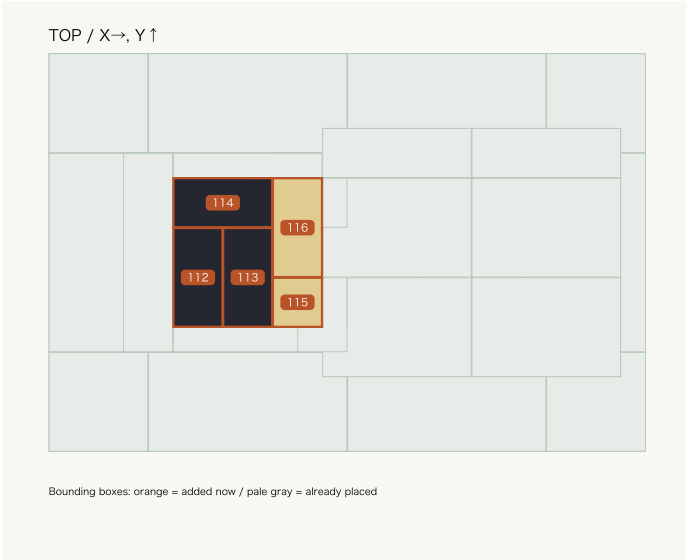


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-112 Rear of head	B-2x4 Black	40.0, 40.0, 92.8 Z rotation 0°	O-black-01-NOT_SLICED.3mf slot 13 (example)
O-113 Rear of head	B-2x4 Black	56.0, 40.0, 92.8 Z rotation 0°	O-black-01-NOT_SLICED.3mf slot 14 (example)
O-114 Rear of head	B-2x4 Black	40.0, 72.0, 92.8 Z rotation 90°	O-black-01-NOT_SLICED.3mf slot 15 (example)
O-115 Face	B-2x2 Light beige	72.0, 40.0, 92.8 Z rotation 0°	O-beige-01-NOT_SLICED.3mf slot 5 (example)
O-116 Face	B-2x4 Light beige	72.0, 56.0, 92.8 Z rotation 0°	O-beige-01-NOT_SLICED.3mf slot 2 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 28 / Square head and beige face: course 3

Add 5 parts / insert from above ↓ The face points toward +X, toward the desk. There are no eyes, goggles or logos.

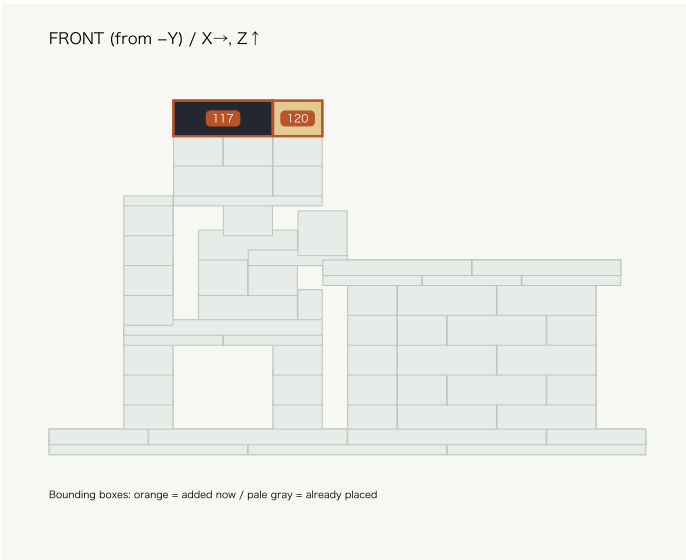
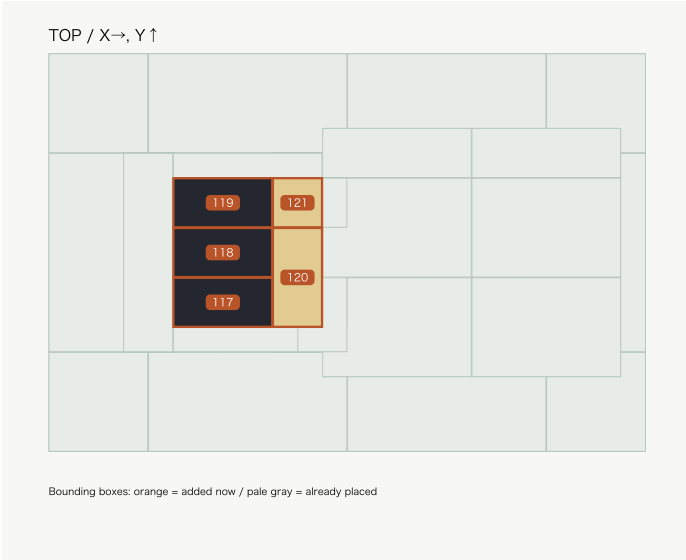


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-117 Rear of head	B-2x4 Black	40.0, 40.0, 102.4 Z rotation 90°	O-black-01-NOT_SLICED.3mf slot 16 (example)
O-118 Rear of head	B-2x4 Black	40.0, 56.0, 102.4 Z rotation 90°	O-black-01-NOT_SLICED.3mf slot 17 (example)
O-119 Rear of head	B-2x4 Black	40.0, 72.0, 102.4 Z rotation 90°	O-black-01-NOT_SLICED.3mf slot 18 (example)
O-120 Face	B-2x4 Light beige	72.0, 40.0, 102.4 Z rotation 0°	O-beige-01-NOT_SLICED.3mf slot 3 (example)
O-121 Face	B-2x2 Light beige	72.0, 72.0, 102.4 Z rotation 0°	O-beige-01-NOT_SLICED.3mf slot 6 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 29 / Black upper head rim

Add 1 part / insert from above ↓

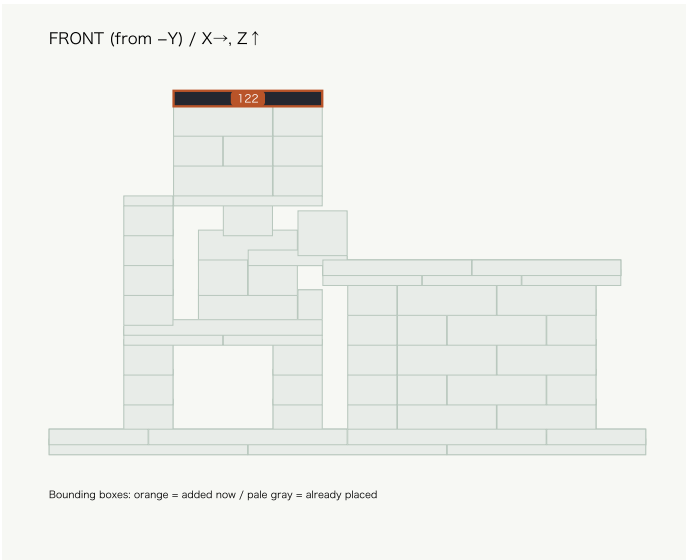
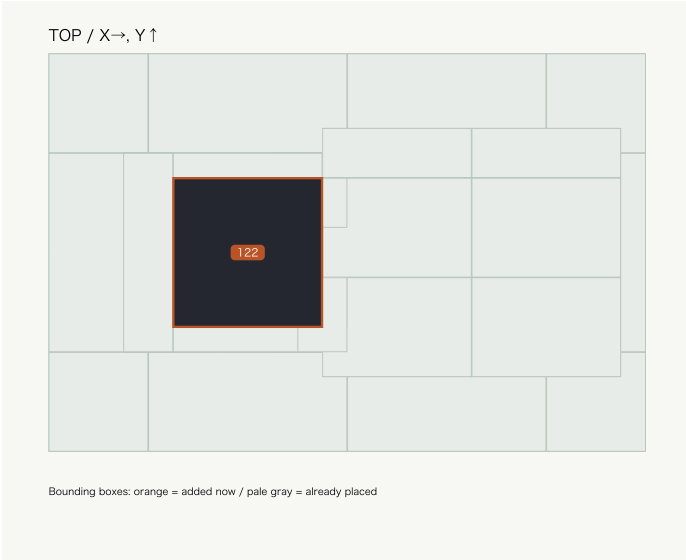


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-122 Upper head rim	P-6x6 Black	40.0, 40.0, 112.0 Z rotation 0°	O-black-01-NOT_SLICED.3mf slot 2 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 30 / Two cat ears

Add 2 parts / insert from above ↓ Use the same type twice, rotating one by 180 degrees. Place the taller sides toward the outside.

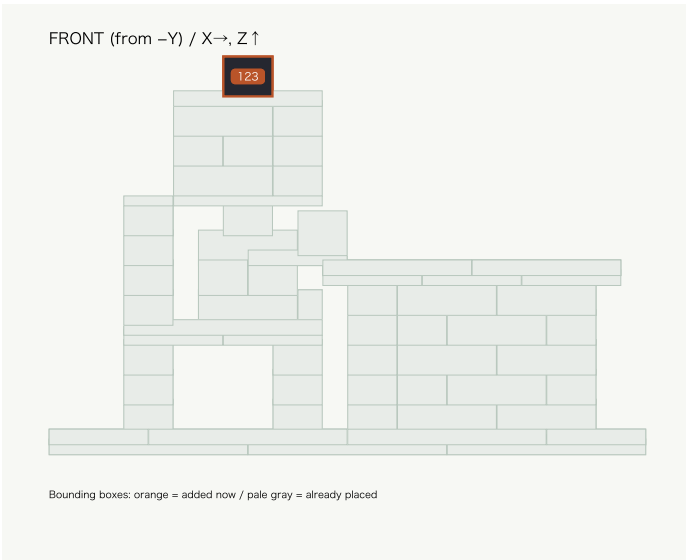
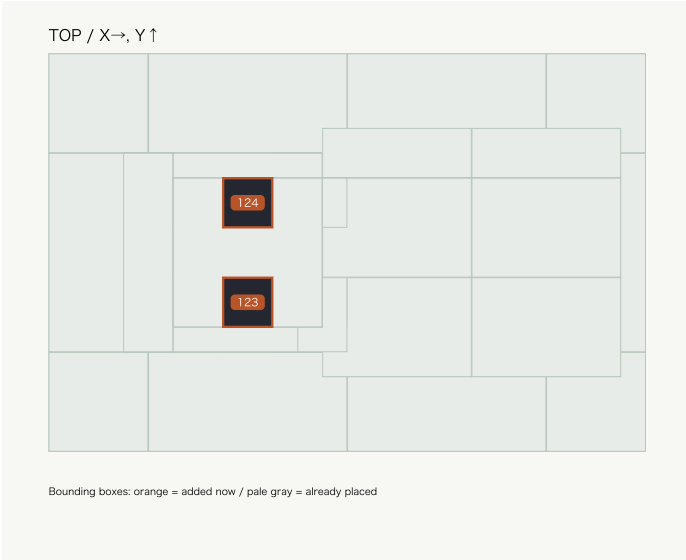


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-123 Front ear	EAR-2x2 Black	56.0, 40.0, 115.2 Z rotation 0°	O-black-01-NOT_SLICED.3mf slot 20 (example)
O-124 Rear ear	EAR-2x2 Black	56.0, 72.0, 115.2 Z rotation 180°	O-black-01-NOT_SLICED.3mf slot 21 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 31 / Monitor stand

Add 1 part / insert from above ↓

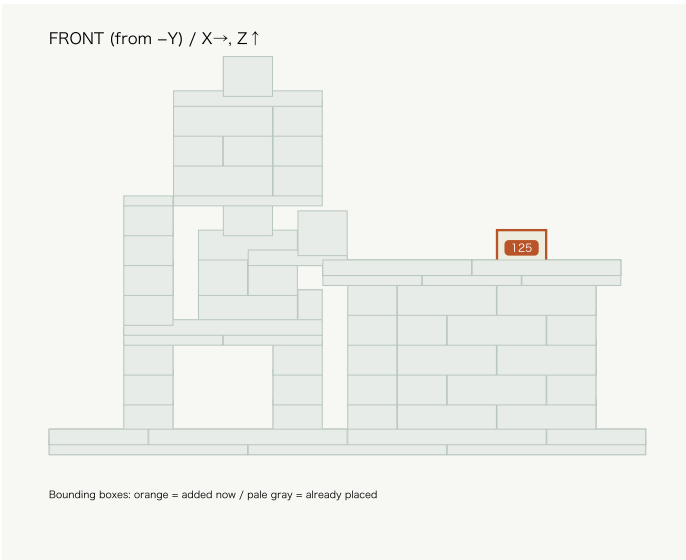
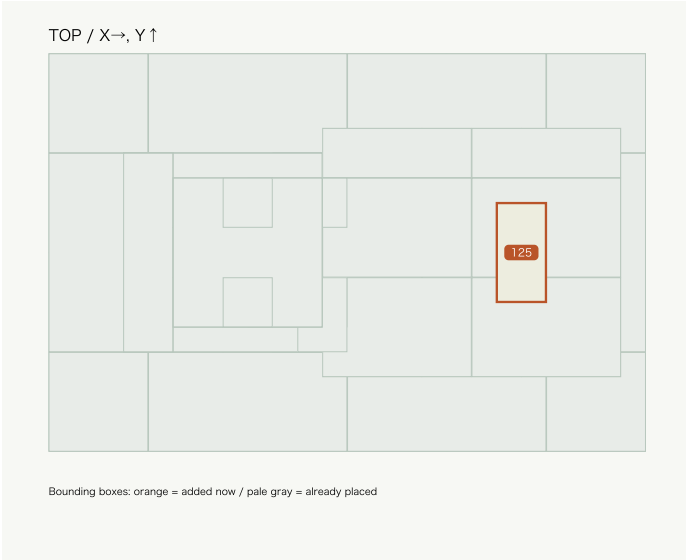


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-125 Monitor stand	B-2x4 White	144.0, 48.0, 60.8 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 34 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 32 / White monitor: course 1

Add 2 parts / insert from above ↓ This models the white back seen in the reference. No unverified screen content is added.

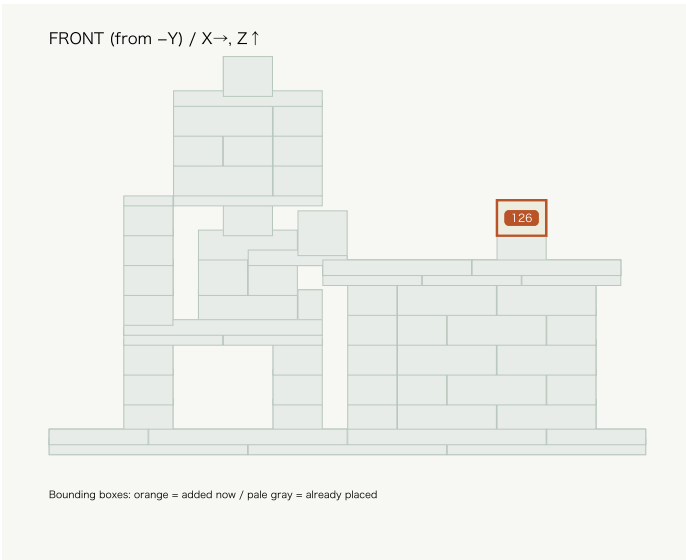
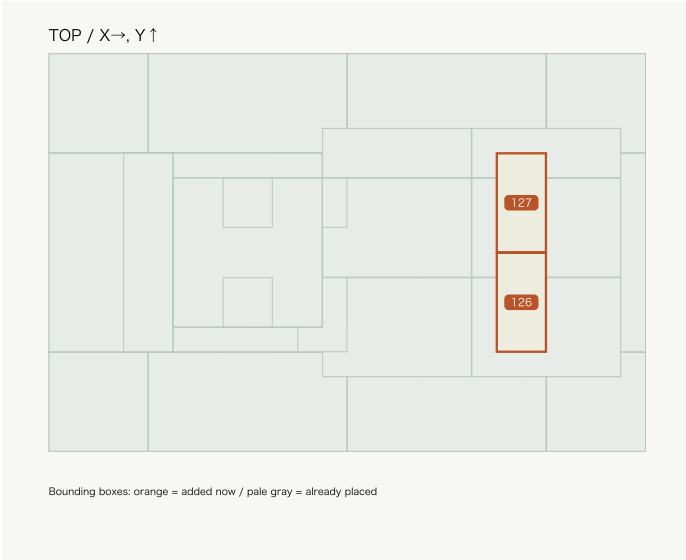


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-126 Monitor	B-2x4 White	144.0, 32.0, 70.4 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 35 (example)
O-127 Monitor	B-2x4 White	144.0, 64.0, 70.4 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 36 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 33 / White monitor: course 2

Add 3 parts / insert from above ↓ This models the white back seen in the reference. No unverified screen content is added.

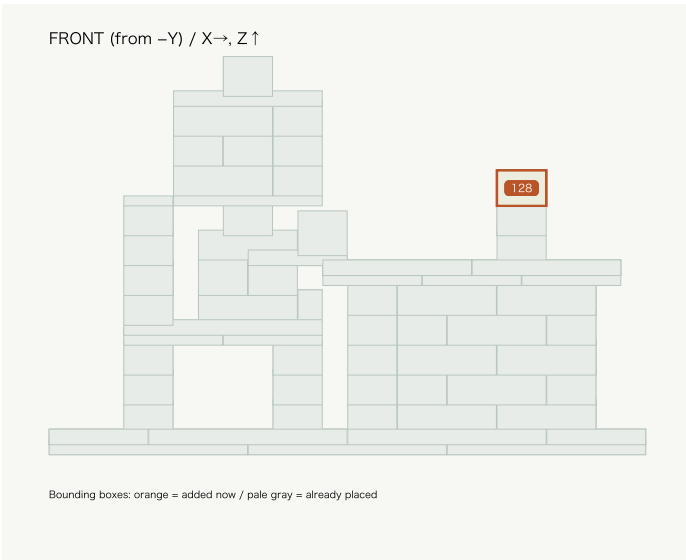
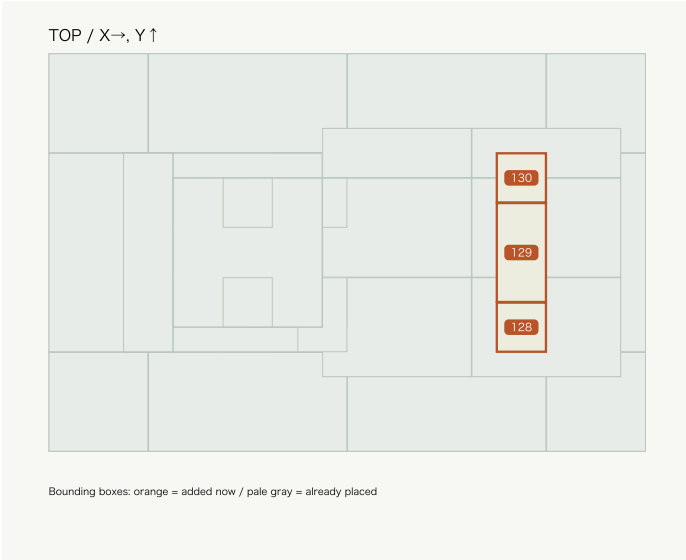


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-128 Monitor	B-2x2 White	144.0, 32.0, 80.0 Z rotation 0°	O-white-03-NOT_SLICED.3mf slot 13 (example)
O-129 Monitor	B-2x4 White	144.0, 48.0, 80.0 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 37 (example)
O-130 Monitor	B-2x2 White	144.0, 80.0, 80.0 Z rotation 0°	O-white-03-NOT_SLICED.3mf slot 14 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 34 / White monitor: course 3

Add 2 parts / insert from above ↓ This models the white back seen in the reference. No unverified screen content is added.

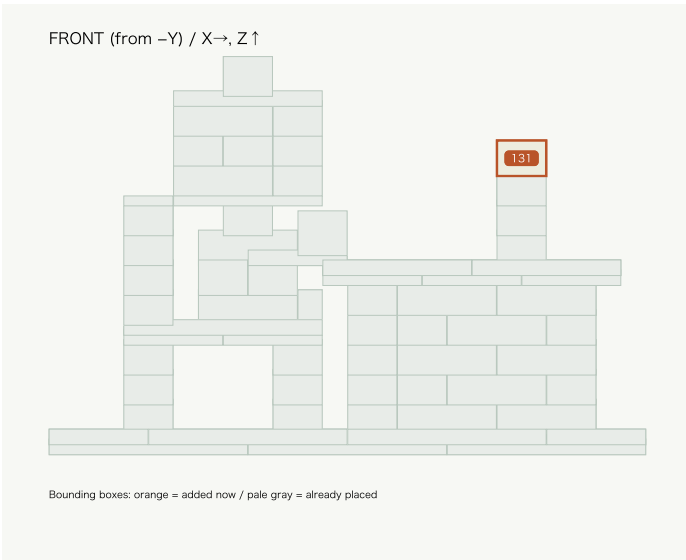
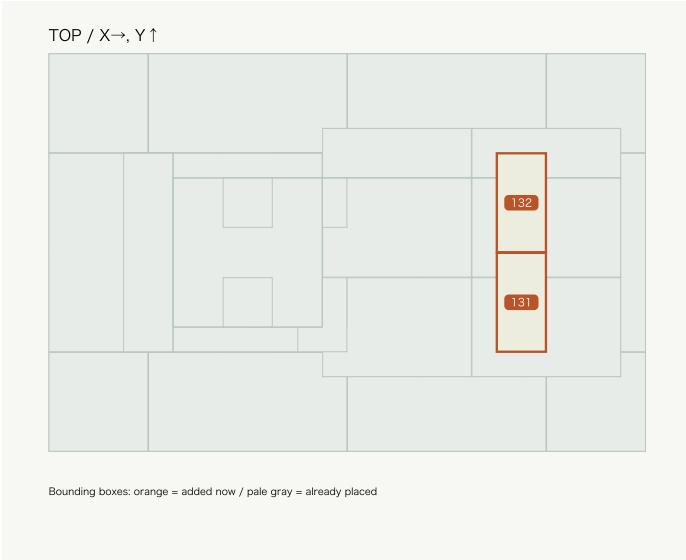


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-131 Monitor	B-2x4 White	144.0, 32.0, 89.6 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 38 (example)
O-132 Monitor	B-2x4 White	144.0, 64.0, 89.6 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 39 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 35 / White monitor: course 4

Add 3 parts / insert from above ↓ This models the white back seen in the reference. No unverified screen content is added.

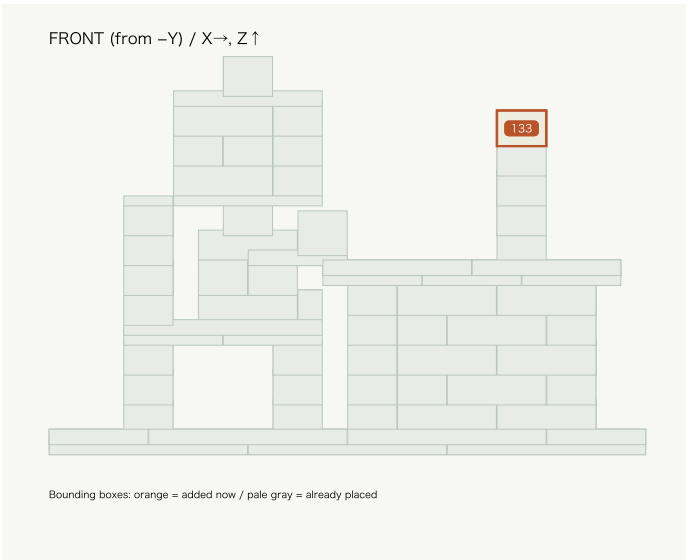
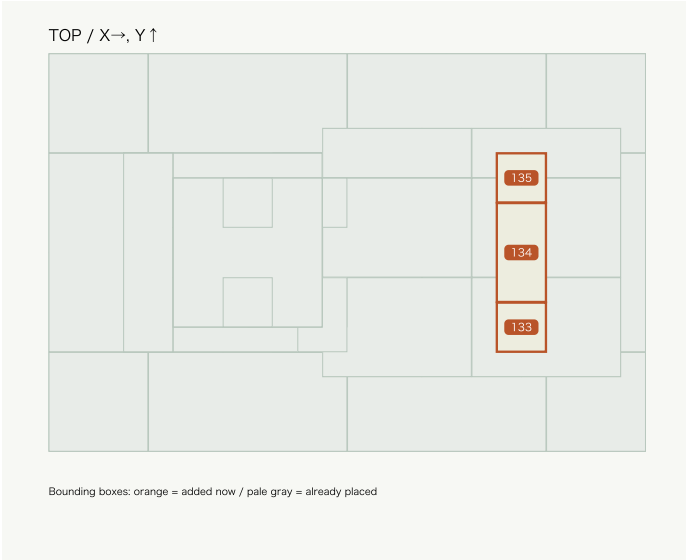


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-133 Monitor	B-2x2 White	144.0, 32.0, 99.2 Z rotation 0°	O-white-03-NOT_SLICED.3mf slot 15 (example)
O-134 Monitor	B-2x4 White	144.0, 48.0, 99.2 Z rotation 0°	O-white-02-NOT_SLICED.3mf slot 40 (example)
O-135 Monitor	B-2x2 White	144.0, 80.0, 99.2 Z rotation 0°	O-white-03-NOT_SLICED.3mf slot 16 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 36 / Cap the monitor

Add 1 part / insert from above ↓

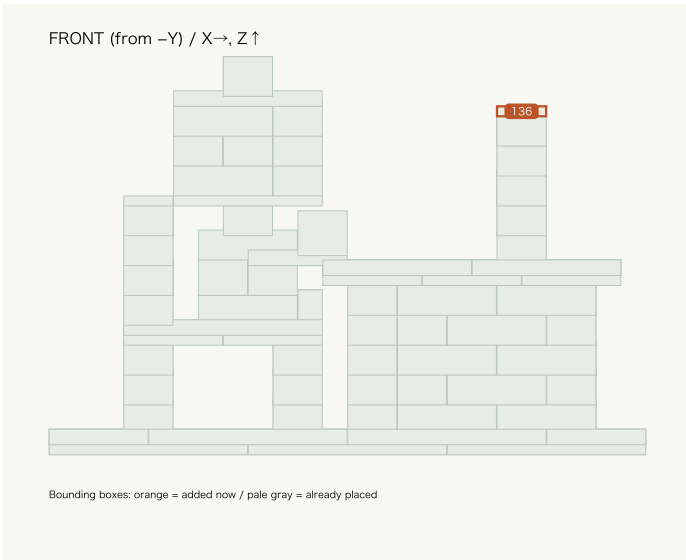
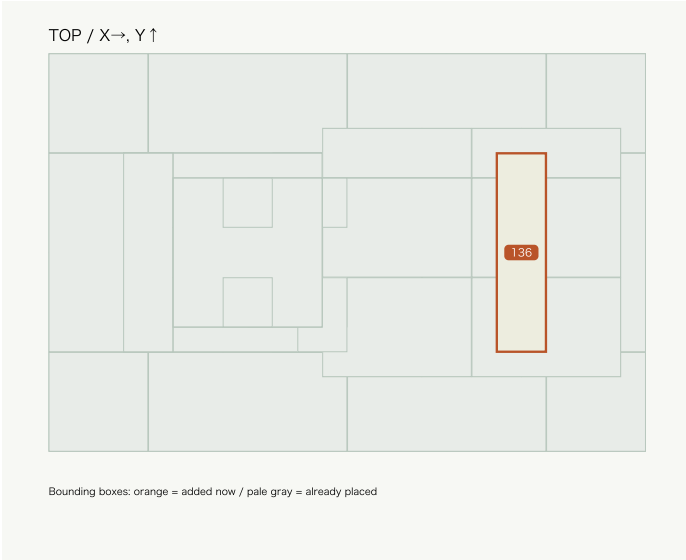


Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-136 Monitor cap	T-2x8 White	144.0, 32.0, 108.8 Z rotation 0°	O-white-01-NOT_SLICED.3mf slot 9 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Step 37 / White keyboard

Add 1 part / insert from above ↓ Align its long edge with Y. The assembly is complete.

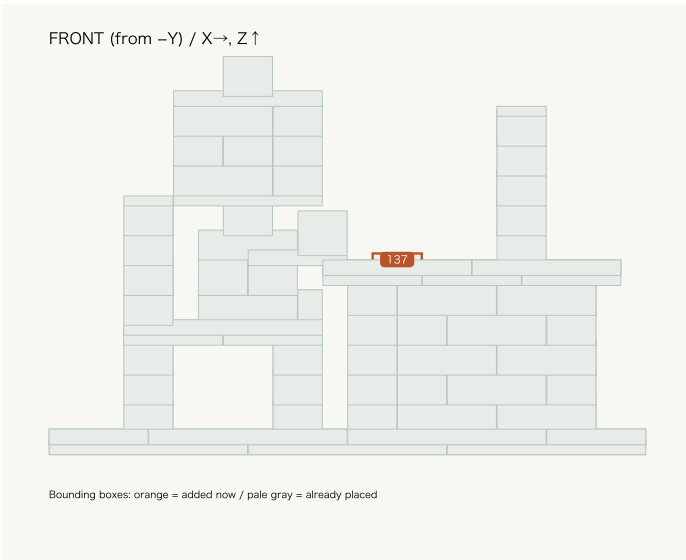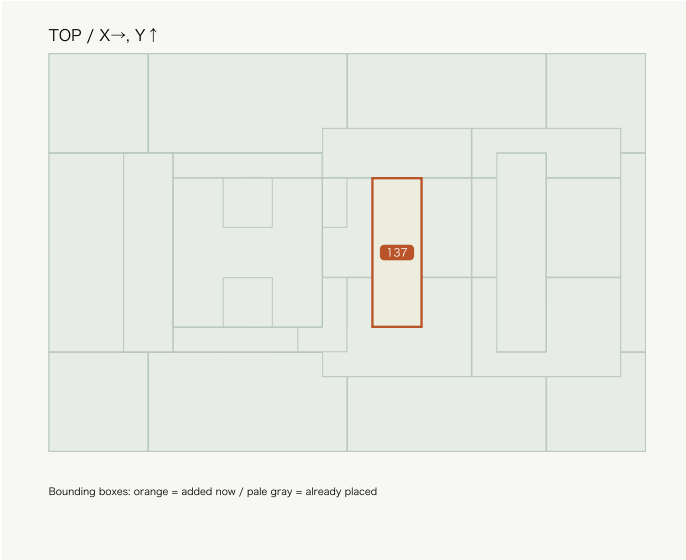

Instance ID / role	Type / color	Lower corner X,Y,Z mm / rotation	Example print source
O-137 Keyboard	KEY-2x6 White	104.0, 40.0, 60.8 Z rotation 0°	O-white-01-NOT_SLICED.3mf slot 16 (example)

All same-type, same-color parts are interchangeable. The interactive guide shows every source and the real mesh. Diagram labels omit the O- prefix. Front-view labels may overlap in depth; use the top view and the 3D guide together. These are bounding-box layout diagrams, not a substitute for the CAD shape.

Verification scope, provenance and limitations

Digital checks performed

See validation/report.json and the individual evidence files. Checks cover native reopening, all STEP solids, mesh closure/normals/dimensions, unintended interference, insertion approaches, support connections, BOM/3MF quantities, decoded video and browser/offline operation. The English guide uses the same source geometry, instance IDs, slot mapping and step order as Japanese.

Not physically qualified

Actual slicing, layer previews, printing, fit, retention, warping, elephant foot, bridge quality, strength, tip-over and durability remain untested. CAD volume or center of mass is not an actual printed weight or stability test. Test the loose pair before any larger batch.

Only FreeCAD GUI display colors are unverified: isolated offscreen GUI startup stalled. Headless native reopening confirmed geometry, positions, steps, color names and PartColor attributes. Default gray display may occur. Use the bilingual guide or Blender for colors; unchanged native object labels may retain Japanese.

Independent design and rights

The 8 mm dimensions and workflow were informed by Copilot Brick Display at commit 0967390547184b342adea0d7e8659dc8ac8f153b. Its original code, CAD, artwork and fonts were not copied; the reference has no blanket license. The user's photo was viewed only as a reference. The photo, box, logos, printed branding and personal information are not included. Hidden/internal structures are independently designed.

This is not an official LEGO, GitHub or Bambu Lab product. No endorsement, commercial-brick compatibility guarantee or toy certification is claimed. Public availability does not grant a blanket reuse license; consult NOTICE and the owner.

Public and offline editions

The approved destinations are ktanino10/octodesk-brick-kit, its GitHub Pages site and Releases. Extract the ZIP and open index.html; select English or use ?lang=en. No CDN, login or local server is required. Three.js is included under MIT. Build-tool binaries and font files are not redistributed.

The shared video still contains baked-in Japanese text. English synchronized captions and downloadable SRT/VTT are added separately; the original frames and geometry were not rerendered. No printer transmission or print start is performed.