

Multi Period Optimal Power Flow using Matpower and Pyomo

Taeho Nam

Changwon National University
rapitransit@gmail.com

July 3, 2025

Table of Contents I

- 1 Background
Multi Period Optimal Power Flow(MPOPF)
- 2 MPOPF Flow Formulation
MPOPF Overview
Nomenclature
MPOPF At glance...
Objective function
Constraints
- 3 Implementation of MPOPF in a 33-bus distribution system
33-bus distribution system
- 4 References

Background

Multi Period Optimal Power Flow

- **MPOPF** (Multi-Period Optimal Power Flow) is a method for optimizing the operation of a power system over multiple time periods.
- It extends the conventional single-period Optimal Power Flow (OPF) to consider multiple time intervals.

bus	p_mw	q_mvar
1	0.000	0.000
2	0.100	0.060
3	0.090	0.040
4	0.120	0.080
5	0.060	0.030
6	0.060	0.020
7	0.200	0.100
8	0.200	0.100
9	0.060	0.020
10	0.060	0.020
11	0.045	0.030
12	0.060	0.035
13	0.060	0.035

Single-period Data
(specific time)

bus	p_mw	q_mvar	p_mw_1	q_mvar_1	p_mw_2	q_mvar_2	p_mw_3	q_mvar_3	...
1	0.000	0.000	0.000000	0.000000	0.000000	0.000000	0.000000	0.000000	...
2	0.100	0.060	0.061538	0.036923	0.057692	0.034615	0.053846	0.032308	...
3	0.090	0.040	0.055385	0.024615	0.051923	0.023077	0.048462	0.021538	...
4	0.120	0.080	0.073846	0.049231	0.069231	0.046154	0.064615	0.043077	...
5	0.060	0.030	0.036923	0.018462	0.034615	0.017308	0.032308	0.016154	...
6	0.060	0.020	0.036923	0.012308	0.034615	0.011538	0.032308	0.010769	...
7	0.200	0.100	0.123077	0.061538	0.115385	0.057692	0.107692	0.053846	...
8	0.200	0.100	0.123077	0.061538	0.115385	0.057692	0.107692	0.053846	...
9	0.060	0.020	0.036923	0.012308	0.034615	0.011538	0.032308	0.010769	...
10	0.060	0.020	0.036923	0.012308	0.034615	0.011538	0.032308	0.010769	...
11	0.045	0.030	0.027692	0.018462	0.025962	0.017308	0.024231	0.016154	...
12	0.060	0.035	0.036923	0.021538	0.034615	0.020192	0.032308	0.018846	...
13	0.060	0.035	0.036923	0.021538	0.034615	0.020192	0.032308	0.018846	...

Multi-period Data
(1-24h)

Multi Period Optimal Power Flow Formulation

Overview

- MPOPF Nomenclature: Slide 7
- MPOPF At glance...: Slide 10
- MPOPF Objective function: Slide 15
- MPOPF Constraints and expressions: Slide 17
 - MPOPF Load balance
 - MPOPF Power and voltage
 - MPOPF Current

Optimization problem is formulated as:

- 1 MPOPF Objective function:

minimize (or maximize) $f(\mathbf{x})$

- 2 MPOPF Constraints:

$$g(\mathbf{x}) \leq 0, \quad h(\mathbf{x}) = 0$$

- 3 MPOPF Functions in the objective and constraints:

$$f(\mathbf{x}), \quad g(\mathbf{x}), \quad h(\mathbf{x})$$

Nomenclature

Sets, indices, parameters

- Indices

i, j Index of bus
 l Index of line
 t Index of time

- Sets

Ω_l Set of lines
 Ω_b Set of buses
 Ω_{b_i} Set of connected buses
in the bus i
 Ω_{b_g} Set of generation buses
($\Omega_{b_g} \subset \Omega_b$)
 T The total time period
(e.g 1,2...,24 for 24 hours)

Nomenclature

Sets, indices, parameters

- Parameters or constants

Z_{ij}, Y_{ij}	Impedance and admittance of line ij (from bus i to bus j)
G_{ij}, B_{ij}	Conductance and susceptance of line ij (from bus i to bus j)
$\overline{V}, \underline{V}$	Maximum and minimum voltage magnitude
\overline{I}_{ij}	Maximum current flow limit of line ij

$P_{D_{i,t}}, Q_{D_{i,t}}$	Active and reactive power demand at bus i
$\overline{P}_{G_i}, \underline{P}_{G_i}$	Maximum and minimum active power from generator at bus i
$\overline{Q}_{G_i}, \underline{Q}_{G_i}$	Maximum and minimum reactive power from generator at bus i
$baseMVA$	Value of base MVA

Nomenclature

Sets, indices, parameters

- Functions

$P_{ij,t}, Q_{ij,t}$	Active and reactive power flow of line ij at time t
$I_{r_{ij,t}}, I_{Im_{ij,t}}$	Real and Imaginary current flow of line ij at time t
$P_{l,t}^{lineloss}$	Active line loss of line $l(ij)$ at time t

- Variables

$ \dot{V}_{i,t} $	Voltage magnitude in bus i at time t
$\theta_{i,t}$	Voltage phase angle in bus i at time t
$P_{G_{i,t}}, Q_{G_{i,t}}$	Active and reactive power from generator at bus i at time t

MPOPF At glance...

Objective function: Eq. (1)

$$\min \sum_{\forall t} \sum_{\forall i,j} [-G_{ij}(|\dot{V}_{i,t}|^2 + |\dot{V}_{j,t}|^2) + 2G_{ij}|\dot{V}_{i,t}||\dot{V}_{j,t}|\cos(\theta_{i,t} - \theta_{j,t})]$$

Constraints: Eqs. (5),(6),(9),(10),(11),(12),(13)

$$P_{G_{i,t}} - P_{D_{i,t}} = \sum_{j \in \Omega_{b_i}} (P_{ij,t}) \quad \forall i \in \Omega_b, \forall t \in T$$

$$Q_{G_{i,t}} - Q_{D_{i,t}} = \sum_{j \in \Omega_{b_i}} (Q_{ij,t}) \quad \forall i \in \Omega_b, \forall t \in T$$

$$\underline{P}_{G_i} \leq P_{G_{i,t}} \leq \overline{P}_{G_i} \quad \forall i \in \Omega_b, \forall t \in T$$

$$\underline{Q}_{G_i} \leq Q_{G_{i,t}} \leq \overline{Q}_{G_i} \quad \forall i \in \Omega_b, \forall t \in T$$

$$\underline{V} \leq |\dot{V}_{i,t}| \leq \overline{V} \quad \forall i \in \Omega_b, \forall t \in T$$

$$\theta_{i,t} = \begin{cases} 0 & : \text{Bus } i \text{ is slack,} \\ \text{free} & : \text{Otherwise.} \end{cases}$$

$$I_{r_{ij,t}}^2 + I_{lm_{ij,t}}^2 \leq \overline{I}_{ij}^2 \quad \forall l(ij) \in \Omega_l, \forall t \in T$$

MPOPF At glance...

Functions or expressions: Eq. (2), (3), (4)

$$[-G_{ij}(|\dot{V}_{i,t}|^2 + |\dot{V}_{j,t}|^2) + 2G_{ij}|\dot{V}_{i,t}||\dot{V}_{j,t}|\cos(\theta_{i,t} - \theta_{j,t})]$$

$$= P_{l,t}^{line loss} = P_{ij,t} + P_{ji,t}$$

$$\forall l(ij) \in \Omega_l, \forall t \in T$$

MPOPF At glance...

$$P_{ij,t} = -G_{ij} \left| \dot{V}_{i,t} \right|^2 + G_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \cos(\theta_{i,t} - \theta_{j,t}) \\ + B_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \sin(\theta_{i,t} - \theta_{j,t})$$

$$\forall l(ij) \in \Omega_l, \forall t \in \mathcal{T}$$

$$P_{ji,t} = -G_{ij} \left| \dot{V}_{j,t} \right|^2 + G_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \cos(\theta_{i,t} - \theta_{j,t}) \\ - B_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \sin(\theta_{i,t} - \theta_{j,t})$$

$$\forall l(ij) \in \Omega_l, \forall t \in \mathcal{T}$$

MPOPF At Glance

Functions or expressions (Continued): Eq. (7),(8), (14), (15)

$$Q_{ij,t} = B_{ij} \left| \dot{V}_{i,t} \right|^2 + G_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \sin(\theta_{i,t} - \theta_{j,t}) \\ - B_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \cos(\theta_{i,t} - \theta_{j,t})$$

$$\forall l(ij) \in \Omega_l, \forall t \in T$$

$$Q_{ji,t} = B_{ij} \left| \dot{V}_{j,t} \right|^2 - G_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \sin(\theta_{i,t} - \theta_{j,t}) \\ - B_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \cos(\theta_{i,t} - \theta_{j,t})$$

$$\forall l(ij) \in \Omega_l, \forall t \in T$$

MPOPF At Glance

$$I_{rij,t} = -G_{ij} \left| \dot{V}_{i,t} \right| \cos \theta_{i,t} + B_{ij} \left| \dot{V}_{i,t} \right| \sin \theta_{i,t} \\ + G_{ij} \left| \dot{V}_{j,t} \right| \cos \theta_{j,t} - B_{ij} \left| \dot{V}_{j,t} \right| \sin \theta_{j,t}$$

$$\forall (ij) \in \Omega_l, \forall t \in T$$

$$I_{lmij,t} = -B_{ij} \left| \dot{V}_{i,t} \right| \cos \theta_{i,t} - G_{ij} \left| \dot{V}_{i,t} \right| \sin \theta_{i,t} \\ + B_{ij} \left| \dot{V}_{j,t} \right| \cos \theta_{j,t} + G_{ij} \left| \dot{V}_{j,t} \right| \sin \theta_{j,t}$$

$$\forall (ij) \in \Omega_l, \forall t \in T$$

Objective function

$$\min \sum_{\forall t} \sum_{\forall i,j} \left[-G_{ij} (|\dot{V}_{i,t}|^2 + |\dot{V}_{j,t}|^2) + 2G_{ij} |\dot{V}_{i,t}| |\dot{V}_{j,t}| \cos(\theta_{i,t} - \theta_{j,t}) \right] \quad (1)$$

$$\left[-G_{ij} (|\dot{V}_{i,t}|^2 + |\dot{V}_{j,t}|^2) + 2G_{ij} |\dot{V}_{i,t}| |\dot{V}_{j,t}| \cos(\theta_{i,t} - \theta_{j,t}) \right] = P_{l,t}^{line loss} = P_{ij,t} + P_{ji,t} \quad (2)$$

$$\forall l(ij) \in \Omega_l, \forall t \in T$$

MPOPF Objective function

$$\begin{aligned}
 P_{ij,t} = & -G_{ij} \left| \dot{V}_{i,t} \right|^2 + G_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \cos(\theta_{i,t} - \theta_{j,t}) \\
 & + B_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \sin(\theta_{i,t} - \theta_{j,t})
 \end{aligned} \tag{3}$$

$$\forall l(ij) \in \Omega_l, \forall t \in T$$

$$\begin{aligned}
 P_{ji,t} = & -G_{ij} \left| \dot{V}_{j,t} \right|^2 + G_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \cos(\theta_{i,t} - \theta_{j,t}) \\
 & - B_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \sin(\theta_{i,t} - \theta_{j,t})
 \end{aligned} \tag{4}$$

$$\forall l(ij) \in \Omega_l, \forall t \in T$$

MPOPF Constraints

Load balance

$$P_{G_{i,t}} - P_{D_{i,t}} = \sum_{j \in \Omega_{b_i}} P_{ij,t} \quad \forall i \in \Omega_b, \forall t \in T \quad (5)$$

$$Q_{G_{i,t}} - Q_{D_{i,t}} = \sum_{j \in \Omega_{b_i}} Q_{ij,t} \quad \forall i \in \Omega_b, \forall t \in T \quad (6)$$

MPOPF Constraints

Load balance

$$Q_{ij,t} = B_{ij} \left| \dot{V}_{i,t} \right|^2 + G_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \sin(\theta_{i,t} - \theta_{j,t}) - B_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \cos(\theta_{i,t} - \theta_{j,t}) \quad (7)$$

$$\forall l(ij) \in \Omega_l, \forall t \in \mathcal{T}$$

$$Q_{ji,t} = B_{ij} \left| \dot{V}_{j,t} \right|^2 - G_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \sin(\theta_{i,t} - \theta_{j,t}) - B_{ij} \left| \dot{V}_{i,t} \right| \left| \dot{V}_{j,t} \right| \cos(\theta_{i,t} - \theta_{j,t}) \quad (8)$$

$$\forall l(ij) \in \Omega_l, \forall t \in \mathcal{T}$$

MPOPF Constraints

Power and voltage

$$\underline{P}_{G_i} \leq P_{G_i,t} \leq \overline{P}_{G_i} \quad \forall i \in \Omega_b, \forall t \in T \quad (9)$$

$$\underline{Q}_{G_i} \leq Q_{G_i,t} \leq \overline{Q}_{G_i} \quad \forall i \in \Omega_b, \forall t \in T \quad (10)$$

$$\underline{V} \leq |\dot{V}_{i,t}| \leq \overline{V} \quad \forall i \in \Omega_b, \forall t \in T \quad (11)$$

$$\theta_{i,t} = \begin{cases} 0 & : \text{Bus } i \text{ is slack,} \\ \text{free} & : \text{Otherwise.} \end{cases} \quad \forall t \in T \quad (12)$$

$$I_{r_{ij},t}^2 + I_{lm_{ij},t}^2 \leq \overline{I}_{ij}^2 \quad \forall l(ij) \in \Omega_l, \forall t \in T \quad (13)$$

MPOPF Constraints

Current

$$\begin{aligned}
 I_{r_{ij,t}} = & -G_{ij} \left| \dot{V}_{i,t} \right| \cos \theta_{i,t} + B_{ij} \left| \dot{V}_{i,t} \right| \sin \theta_{i,t} \\
 & + G_{ij} \left| \dot{V}_{j,t} \right| \cos \theta_{j,t} - B_{ij} \left| \dot{V}_{j,t} \right| \sin \theta_{j,t}
 \end{aligned} \tag{14}$$

$$\forall l(ij) \in \Omega_l, \forall t \in T$$


$$\begin{aligned}
 I_{lm_{ij,t}} = & -B_{ij} \left| \dot{V}_{i,t} \right| \cos \theta_{i,t} - G_{ij} \left| \dot{V}_{i,t} \right| \sin \theta_{i,t} \\
 & + B_{ij} \left| \dot{V}_{j,t} \right| \cos \theta_{j,t} + G_{ij} \left| \dot{V}_{j,t} \right| \sin \theta_{j,t}
 \end{aligned} \tag{15}$$

$$\forall l(ij) \in \Omega_l, \forall t \in T$$

Implementation of Multi-Period Optimal Power Flow in a 33-bus distribution system


33-bus distribution system

Structure of the 33-bus distribution system

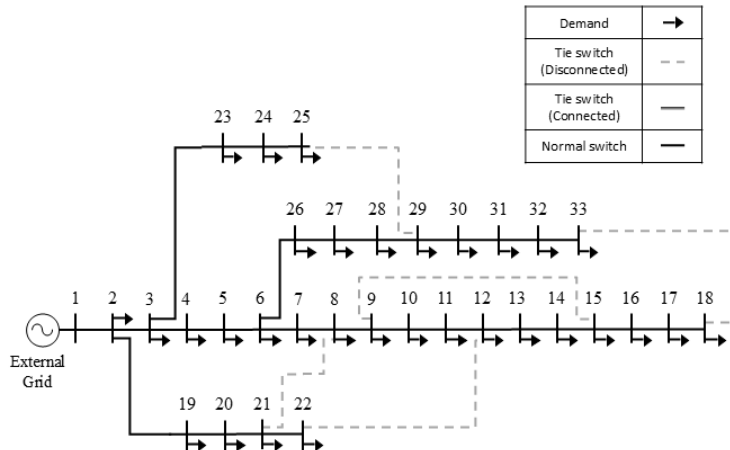

33-bus distribution system


Input Data - Load

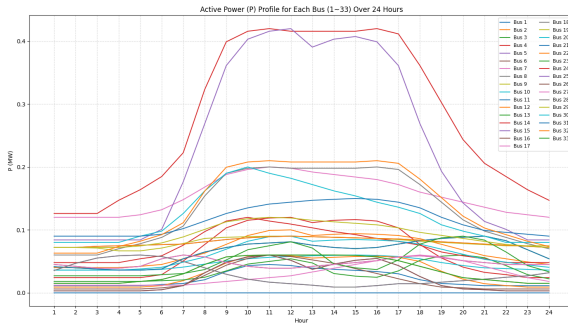

- The load data is based on the 24-hour load profile of a typical distribution system.

33-bus distribution system


Output Data - Voltage magnitude

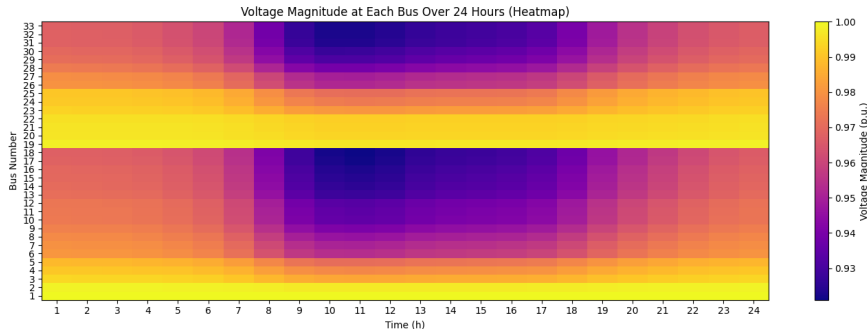

- Increased demand leads to a larger voltage drop
- The voltage drop increases with distance from the generator(BUS 1).

33-bus distribution system

Output Data - Voltage angle

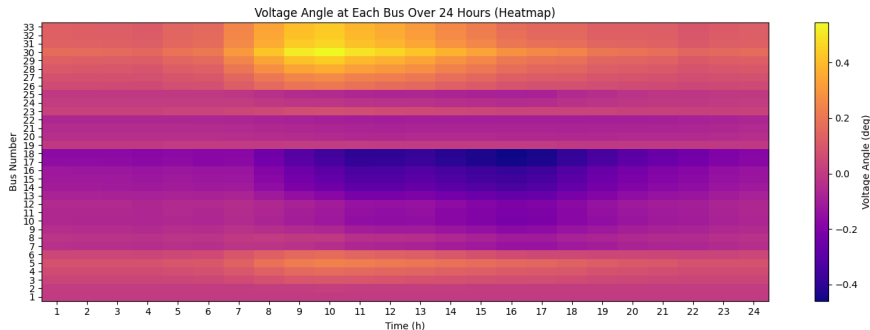

- Increased demand leads to a greater phase angle.
- The phase angle tends to decrease with increasing distance from the generator.
- Bus 30 has a substantial reactive power demand.

Output Data - P line flow sending(at 13:00)

References

Acknowledgements

CWNU Power System Economis Lab

- Woong Ko
- Taeho Nam

The End

Questions? Comments?