

MODULE-3

ADAPTATION OF ANATOMICAL PRINCIPLES FOR BIOENGINEERING DESIGN

Syllabus

Brain as a CPU system (architecture, CNS and Peripheral Nervous System, signal transmission, EEG,) Eye as a Camera system (architecture of rod and cone cells, optical corrections, cataract, lens materials, bionic eye). Heart as a pump system (architecture, electrical signaling - ECG monitoring and heart related issues, reasons for blockages of blood vessels, design of stents, pace makers, defibrillators). Lungs as purification system, Kidney as a filtration system.

Introduction

HUMAN ORGAN SYSTEMS

The human body can be considered as a biological machine. Like a machine, the human body is composed of various interconnected parts that work together to perform specific functions. All these organs together are called as human organ systems. There are several organ systems in the human body, each with its own set of organs and functions.

The major organ systems are given below

- | | |
|-----------------------|--------------------------|
| 1. Circulatory System | 6. Skeletal System |
| 2. Respiratory System | 7. Endocrine System |
| 3. Digestive System | 8. Reproductive System |
| 4. Nervous System | 9. Urinary System |
| 5. Muscular System | 10. Integumentary System |

BIO DESIGNS

Using the principles from biology and nature in the engineering field of design to create innovative solutions for various applications is called as bio design.

Examples:

1. Lotus leaves have inspired the development of self-cleaning surfaces and coatings that repel water and dirt, mimicking the lotus effect.
2. The adhesive capabilities of gecko feet have been a source of inspiration for scientists to produce bio-inspired adhesives.
3. Bioluminescent Lighting: Taking inspiration from bioluminescent organisms like fireflies and jellyfish, designers have created lighting solutions that emit light without the need for electricity.



HUMAN BRAIN


The brain is the center of the nervous system in humans. It is located within the skull. It is a complex and vital organ and is responsible for controlling and coordinating various bodily functions. The brain plays central role in processing information from the senses, enabling perception, thinking, and consciousness.

The brain is composed of billions of specialized cells called neurons. These neurons form intricate networks and pathways throughout the brain and the rest of the body. This network allows the transmission of information and communication with each other through electrical and chemical signals.

THE ARCHITECTURE OF THE BRAIN (ANATOMY OF BRAIN)

The brain is a highly complex organ of human brain. It consists of different region, each region will perform their own specialized functions. An overview of an overview of the major structural components of the brain and their functions is given briefly below.

1. **Cerebrum:** The cerebrum is the largest and most prominent part of the brain. It is divided into two hemispheres, called as the left and right cerebrums. These two are connected by a bundle of nerve fibers. The cerebrum is responsible for higher cognitive functions, including conscious thought, reasoning, memory, language processing, perception, and voluntary movements.
2. **Cerebellum:** The cerebellum is located at the back of the brain, below the cerebrum. The main functions of this part are motor control, coordination, balance, and posture. The cerebellum receives sensory information from the muscles and joints and helps in fine-tuning movements and maintaining equilibrium.
3. **Brainstem:** The brainstem is located at the base of the brain and connects the brain to the spinal cord. The brainstem is responsible for essential functions like regulating breathing, heart rate, blood pressure, and basic involuntary actions.
4. **Thalamus:** The thalamus is a structure located deep within the brain. It acts as a relay station. It receives sensory information from various senses and directs it to the appropriate regions of the cerebral cortex for processing.
5. **Hypothalamus:** The hypothalamus is a small area located below the thalamus. It plays a crucial role in maintaining various bodily functions, including body temperature, hunger, thirst, sleep, and hormone production through its control of the pituitary gland.
6. **Limbic System:** The limbic system is a group of interconnected brain structures located in the center of the brain involved in emotions, memory formation, and motivation. The main structures in limbic system are hippocampus (important for memory), and (associated with emotions and fear response).

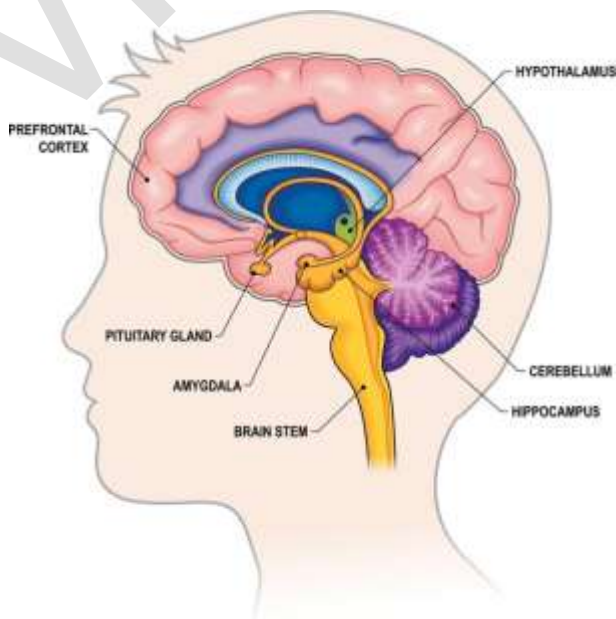

THE CENTRAL NERVOUS SYSTEM (CNS) and PERIPHERAL NERVOUS SYSTEM (PNS)

The Central Nervous System (CNS) and Peripheral Nervous System (PNS) are the two main components of the nervous system in the human body.

The Central Nervous System consists of the brain and spinal cord and is responsible for receiving, processing, and integrating sensory information and transmitting commands to the rest of the body. The brain acts as the command center, receiving and processing sensory inputs and generating motor outputs, while the spinal cord acts as a relay center, transmitting information between the brain and peripheral nerves.

The Peripheral Nervous System, on the other hand, consists of all the nerves that lie outside the brain and spinal cord. It is responsible for transmitting sensory information from the periphery of the body (such as the skin, muscles, and organs) to the CNS, and transmitting commands from the CNS to the periphery. The PNS can be further divided into the somatic nervous system and the autonomic nervous system.

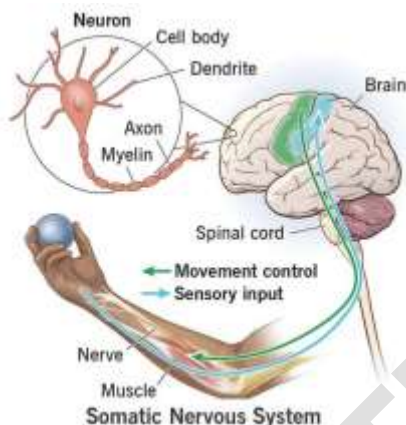
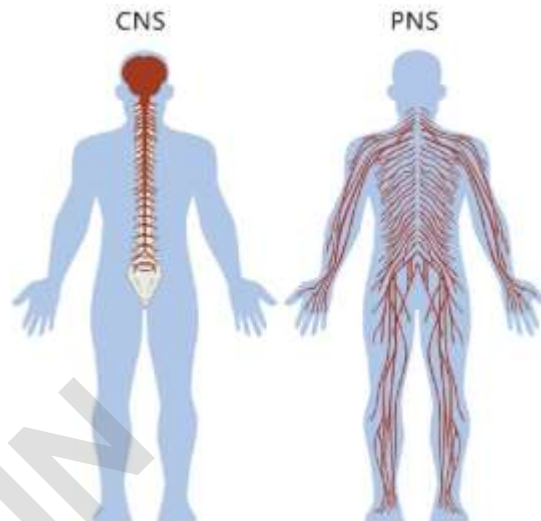



Figure: Representation of function of somatic nervous system

The somatic nervous system controls voluntary movements, while the autonomic nervous system controls involuntary functions such as heart rate, digestion, and respiration.

Signal Transmission

Signal transmission in the brain occurs through the nerve cells, or neurons.

A neuron receives inputs from other neurons at its dendrites, integrates the information, and then generates an electrical impulse, or action potential, that travels down through its axon to the synaptic terminals present at the bottom of the neuron. When it reaches the synaptic terminals, the neuron releases chemical messenger called neurotransmitters, which cross the synaptic gap and bind to receptors on the postsynaptic neuron, leading to the initiation of another action potential in the postsynaptic neuron.

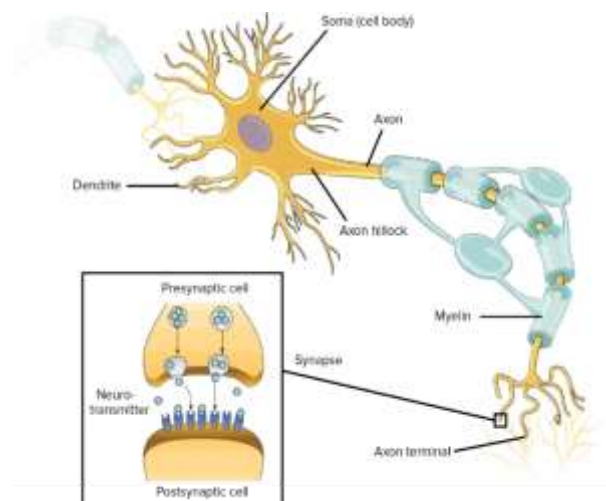

This process of transmitting information from one neuron to another is known as synaptic transmission and

DEPARTMENT OF CHEMISTRY - SAI VIDYA INSTITUTE OF TECHNOLOGY


forms the basis of communication within the brain.

Different types of neurotransmitters have different effects on postsynaptic neurons, and the balance of neurotransmitter levels can influence brain function, including mood, learning, and memory.

ELECTROENCEPHALOGRAPHY (EEG)

It's a method for measuring the electrical activity of the brain.

An EEG records the electrical signals generated by the brain's neurons as they communicate with each other. The signals produced by the neurons are recorded through electrodes placed on the scalp of the brain and the resulting EEG pattern produced during this process provides the information about the synchronized electrical activity of neurons.

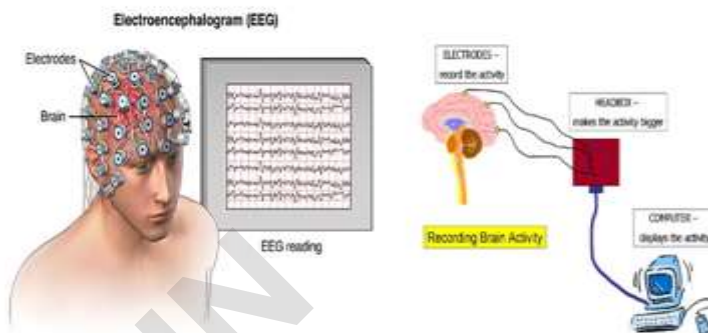

Applications of EEG

- ❖ **Diagnosis of Epilepsy:** EEG is a widely used tool to diagnose epilepsy and other seizure disorders. It can detect abnormal electrical activity in the brain, which can help to confirm the diagnosis and determine the location of the seizure focus.
- ❖ **Sleep Studies:** EEG is often used in sleep studies to evaluate sleep patterns and diagnose sleep disorders.
- ❖ **Brain-Computer Interfaces (BCI):** EEG can be used to control external devices such as prosthetic limbs or computer software. This is done by detecting specific brain waves associated with a particular mental state, such as concentration or relaxation.
- ❖ **Research on Brain Function:** EEG is used in research to study brain function during various activities such as reading, problem-solving, and decision-making. EEG can also be used to investigate how the brain responds to stimuli such as light, sound, and touch.
- ❖ **Diagnosis of Brain Disorders:** EEG can be used to diagnose a wide range of brain disorders including dementia, Parkinson's disease, and traumatic brain injury.
- ❖ **Anesthesia Monitoring:** EEG can be used to monitor the depth of anesthesia during surgery to ensure that the patient remains in a safe and comfortable state.
- ❖ **Monitoring Brain Activity during Coma:** EEG is also used to monitor brain activity in patients who are in a coma to determine the level of brain function and assess the likelihood of recovery.

ROBOTIC ARMS FOR PROSTHETICS

Robotic arms for prosthetics are advanced prosthetic devices that use robotics technology to restore functionality to individuals with upper limb amputations.

These devices typically use motors, actuators, and sensors to mimic the movements of a human arm and hand, allowing the wearer to perform tasks such as reaching, grasping, and manipulating objects.

Robotic arms for prosthetics can be controlled in a variety of ways, including direct control through muscle signals (myoelectric control) or brain-machine interfaces, which use electrodes implanted in the brain or placed on the scalp to detect and interpret brain activity. Some prosthetic arms also incorporate machine learning algorithms to improve their performance and adapt to the user's needs over time.

Robotic arm prosthetic direct control through muscle signals (Myoelectric control)

Myoelectric control of a robotic arm prosthetic involves using the electrical signals generated by the wearer's remaining muscles to control the movement of the prosthetic. The system typically involves electrodes placed on the skin over the remaining muscle that are used to detect and interpret the electrical signals generated by the muscle contractions.

When the wearer contracts their muscles, the electrodes detect the electrical signals and send them to a control unit, which interprets the signals and uses them to control the movement of the robotic arm. Depending on the specific design, the control unit may use pattern recognition algorithms to determine which movement the wearer is intending to perform, or the wearer may use a combination of muscle signals to control specific degrees of freedom in the prosthetic arm.



Myoelectric control has the advantage of being directly controlled by the user, allowing for a more intuitive and natural interaction with the prosthetic. It can also provide a high level of control and precision, as the electrical signals generated by the muscles are unique to each individual and can be used to perform a wide range of movements.

However, myoelectric control systems can be complex and may require extensive rehabilitation and training to use effectively, as well as ongoing maintenance to ensure proper function. Additionally, the system may not be suitable for individuals with muscle weakness or other conditions that affect the ability to generate strong electrical signals.

Robotic Arm Prosthetic by Brain-Machine Interfaces

Brain-machine interfaces (BMIs) are a type of technology that allows a user to control a robotic arm prosthetic directly with their brain activity. The system typically involves electrodes placed on the scalp or implanted directly into the brain by surgery to detect and interpret the user's brain signals.

When the user thinks about moving the prosthetic arm, the electrodes detect the corresponding brain activity and send the signals to a control unit, which uses algorithms to interpret the signals and control the movement of the prosthetic.

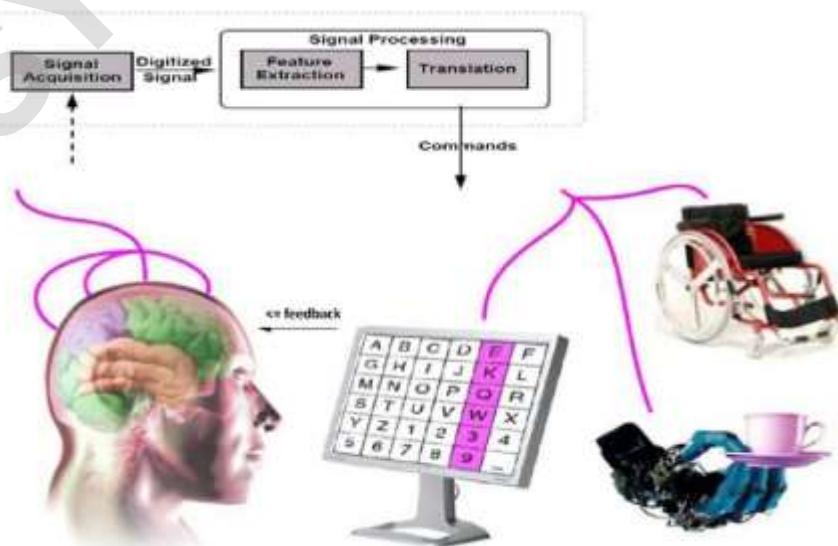


Figure:

Representing brain-machine interfaces

The user can then control the movement of the prosthetic in real-time by thinking about the desired movement. BMIs have the advantage of providing a direct and intuitive connection between the user's brain and the prosthetic, allowing for a high level of control and precision. Additionally, BMIs can be used to provide sensory feedback to the user, allowing them to experience the sensation of touch through the prosthetic.

However, BMIs can be complex and invasive systems, requiring surgical implantation and ongoing maintenance to ensure proper function. Additionally, they may not be suitable for individuals with conditions

DEPARTMENT OF CHEMISTRY - SAI VIDYA INSTITUTE OF TECHNOLOGY

that affect brain activity or who are unable to generate strong enough brain signals to control the prosthetic effectively.

ENGINEERING SOLUTIONS FOR PARKINSON'S DISEASE

Parkinson's disease is a neurodegenerative disorder that affects movement and motor function. There are several engineering solutions aimed at improving the quality of life for individuals with Parkinson's disease, including:

- ❖ **Deep Brain Stimulation (DBS):** DBS involves the implantation of electrodes into specific regions of the brain to deliver electrical stimulation, which can help to relieve symptoms such as tremors, stiffness, and difficulty with movement.
- ❖ **Exoskeletons:** Exoskeletons are wearable devices that provide support and assistance for individuals with mobility issues. Some exoskeletons have been developed specifically for people with Parkinson's disease, and can help to improve balance, reduce tremors, and increase overall mobility.
- ❖ **Telerehabilitation:** It involves the use of telecommunication technology to provide physical therapy and rehabilitation services to individuals with Parkinson's disease, without the need for in-person visits to a therapist.
- ❖ **Smart watch Applications:** Smart watch applications can be used to monitor symptoms of Parkinson's disease, such as tremors, and provide reminders and prompts for medication and exercise.
- ❖ **Virtual Reality:** Virtual reality systems can be used for rehabilitation and therapy for individuals with Parkinson's disease, providing interactive and engaging environments for patients to practice movements and improve coordination and balance.



Figure: Representing typical appearance of Parkinson's disease.

EYE AS A CAMERA SYSTEM


The human eye can be compared to a camera system, as both the eye and a camera capture the light and convert it into an image.

The main components of the eye that correspond to a camera system include:

- ❖ **The Cornea:** This transparent outer layer of the eye functions like a camera lens, bending light to focus it onto the retina.
- ❖ **The Iris:** The iris functions like the diaphragm in a camera, controlling the amount of light that enters the eye.

DEPARTMENT OF CHEMISTRY - SAI VIDYA INSTITUTE OF TECHNOLOGY

- ❖ **The Pupil:** The pupil functions like the aperture in a camera, adjusting the size to control the amount of light entering the eye.
- ❖ **The Retina:** The retina functions like the camera film or sensor, capturing the light and converting it into electrical signals that are sent to the brain.
- ❖ **The Optic Nerve:** The optic nerve functions like the cable connecting the camera to a computer, transmitting the electrical signals from the retina to the brain.

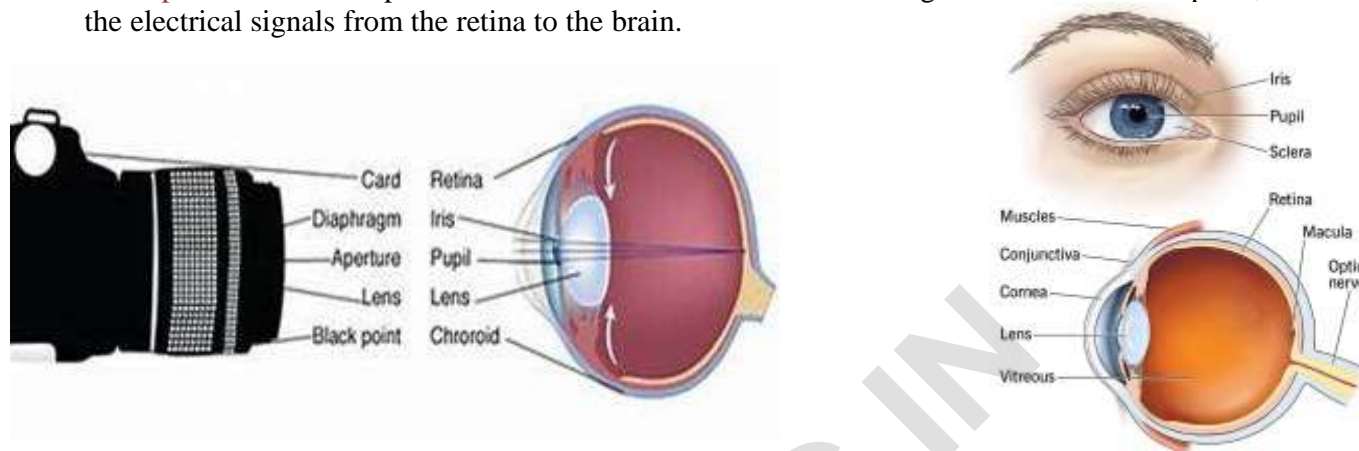

In both the eye and a camera, the captured light is transformed into an image by the lens and the light-sensitive component. The eye processes the image further, allowing for visual perception, while a camera stores the image for later use.

It's important to note that the eye is much more complex than a camera and has several additional functions, such as adjusting for different levels of light and adjusting focus, that are not found in a camera. The eye also has the ability to perceive depth and color, as well as adjust to movements and provide a continuous, real-time image to the brain.

ARCHITECTURE OF ROD AND CONE CELLS


Rod cells are photoreceptor cells in the retina of the eye that are responsible for detecting light and transmitting signals to the brain for the perception of vision, especially in low light conditions. Since these cells are present in the outer part of the retina, rod cells are more sensitive to light than cone cells but do not distinguish color as well.

Cone cells are photoreceptor cells in the retina of the eye that are responsible for color vision and visual acuity. There are three types of cone cells, each containing a different photo pigment sensitive to different wavelengths of light (red, green, and blue), which allow for the perception of color. Cones are less sensitive to light than rod cells but provide better visual acuity and color discrimination. They are concentrated in the fovea, the central part of the retina responsible for detailed and sharp vision.

Rod and cone cells have a similar basic structure, but there are some differences that are crucial for their different functions.

Both types of cells have a photoreceptor outer segment that contains the photo pigment rhodopsin in rod cells and photo pigments in cone cells, that absorbs light and triggers a change in membrane potential. The inner segment contains the cell's organelles, including the nucleus and mitochondria.

The major difference between rod and cone cells is their shape. Rod cells are elongated and cylindrical in shape,

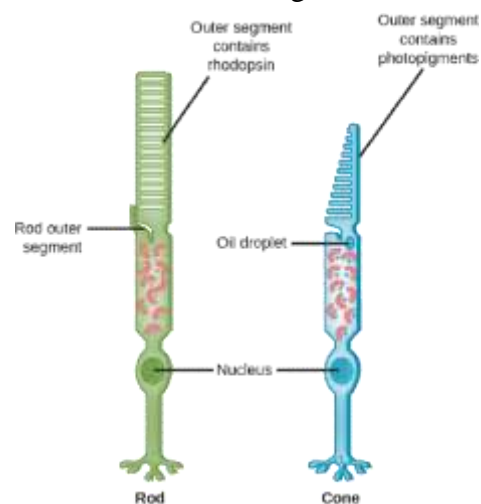

DEPARTMENT OF CHEMISTRY - SAI VIDYA INSTITUTE OF TECHNOLOGY

while cone cells are shorter and more conical in shape. This difference in shape affects the distribution of photo pigments and the number of synaptic contacts with bipolar and ganglion cells, which transmit the signals from retina to the brain. Rod cells have a single long outer segment, while cone cells have several shorter segments. Due to this difference rod cells make synapses with one bipolar cell, while cone cells synapse with one of several bipolar cells.

Optical Corrections

Optical corrections refer to devices or techniques used to improve or correct vision problems caused by a refractive error in the eye.

Refractive errors occur when light entering the eye is not properly focused on the retina, leading to blurred vision. There are several types of refractive errors, including:

Myopia (nearsightedness): Light is focused in front of the retina, making distant objects appear blurry.

Hyperopia (farsightedness): Light is focused behind the retina, making near objects appear blurry.

Astigmatism: Light is not focused evenly on the retina, leading to blurred or distorted vision.

The most common optical corrections include:

Eyeglasses: Glasses with corrective lenses can be used to refocus light onto the retina, improving vision.

Contact lenses: Corrective lenses in the form of contacts sit directly on the cornea and work similarly to eyeglasses.

Refractive surgery: Surgical procedures, such as LASIK and PRK, can reshape the cornea to correct refractive errors.

Optical corrections can greatly improve visual acuity and quality of life for people with refractive errors. However, it is important to have regular eye exams to determine the appropriate correction and monitor eye health.

Cataract


A cataract is a clouding of the lens of the eye that affects vision. The lens, located behind the iris and pupil, normally allows light to pass through to the retina and produces clear, sharp images. However, as we age or due to other factors, the proteins in the lens can clump together and cause the lens to become opaque, leading to vision problems.

Symptoms of a cataract include blurred or hazy vision, increased sensitivity to glare and bright lights, faded or yellowed colors, and double vision in one eye. Cataracts can also cause frequent changes in prescription for eyeglasses or contacts.

Cataract surgery is a common and safe procedure to remove the cloudy lens and replace it with an artificial lens. The surgery is typically performed on an outpatient basis and most people experience improved vision within a few days after the procedure.

In conclusion, cataracts can significantly affect vision, but surgical removal and replacement with an artificial lens can restore clear vision and improve quality of life. Regular eye exams can help detect cataracts early and prevent vision loss.

Lens Materials

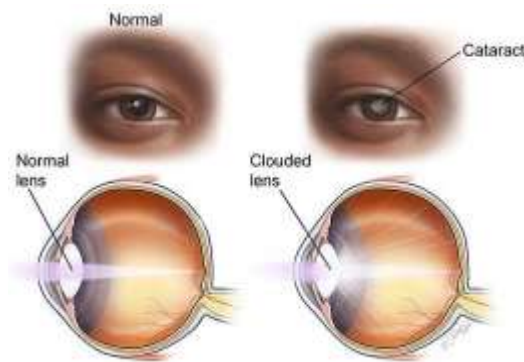

DEPARTMENT OF CHEMISTRY - SAI VIDYA INSTITUTE OF TECHNOLOGY

The artificial lenses used in cataract surgery or for vision correction can be made of a variety of materials, each with its own unique properties and benefits. The most common lens materials include:

- ❖ Polymethyl methacrylate (PMMA): PMMA is a type of plastic that has been used for many years in artificial lenses. It is a durable and affordable material, but does not have the ability to flex and adjust focus like the natural lens.
- ❖ Silicone: Silicone is a soft, flexible material that is resistant to cracking and breaking. It is often used in phakic intraocular lenses (IOLs), which are implanted in front of the natural lens.
- ❖ Acrylic: Acrylic is a lightweight, clear material that is similar in properties to PMMA. It is often used in foldable IOLs, which can be inserted through a smaller incision.
- ❖ Hydrophobic acrylic: Hydrophobic acrylic is a type of acrylic material that has a special surface treatment that helps to reduce glare and halos around lights.
- ❖ Hydrophilic acrylic: Hydrophilic acrylic is a type of acrylic material that is designed to be more compatible with the natural fluid in the eye, reducing the risk of vision-threatening complications.

The choice of lens material will depend on several factors, including the patient's individual needs, the surgeon's preference, and the potential risks and benefits of each material.

BIONIC EYE OR ARTIFICIAL EYE

A bionic eye, also known as a retinal implant, is a type of prosthetic device that is surgically implanted into the eye to help restore vision to people who have lost their sight due to certain conditions such as retinitis pigmentosa or age-related macular degeneration.

The device typically consists of a camera, a processor, and an electrode array that is attached to the retina. The camera captures images and sends signals to the processor, which then transmits electrical stimulation to the electrodes in the retina to stimulate the remaining healthy cells and restore vision. The restored vision is not perfect, but it can help people with vision loss to perform daily tasks more easily and safely.



Materials Used in Bionic Eye

The materials used in a bionic eye can vary depending on the specific device and manufacturer. However, some of the common materials used in bionic eye technology include:

- ❖ Silicon or other semiconducting materials for the camera and the electrode array.
- ❖ Biocompatible materials for the casing of the device and the electrode array, such as titanium or titanium alloys, to minimize the risk of infection and rejection by the body.
- ❖ Conductive materials, such as platinum, iridium, or gold, for the electrodes in the array to provide efficient electrical stimulation to the retina.
- ❖ Polymers, such as silicone or polyimide, for insulation and protection of the electrodes and other components.
- ❖ Optical materials, such as glass or acrylic, for the lens of the camera.
- ❖ Biocompatible and flexible materials for the electrical connections between the camera and the processing unit and between the processing unit and the electrode array.

In addition to these materials, advanced computer algorithms and machine learning techniques are also used

DEPARTMENT OF CHEMISTRY - SAI VIDYA INSTITUTE OF TECHNOLOGY

to improve the accuracy and reliability of the bionic eye technology.

HEART AS A PUMP SYSTEM

The heart is a complex pump system that circulates blood throughout the body.

It consists of four chambers, the right atrium, the left atrium, the right ventricle, and the left ventricle. Blood enters the right atrium from the body and is pumped into the right ventricle, which then pumps the blood to the lungs for oxygenation. Oxygenated blood returns to the heart and enters the left atrium, which pumps the blood into the left ventricle. The left ventricle then pumps the oxygenated blood out to the rest of the body.



Between each chamber, there are one-way valves that ensure the blood flows in the correct direction and prevent backflow. The heart is also surrounded by the pericardium, a sac that contains a small amount of fluid and helps to protect and lubricate the heart as it beats.

The Heart Beat

The heart's pumping action is controlled by a complex network of electrical and chemical signals, which generate the rhythm of the heartbeat.

Figure: Representation of electrical system of the heart

An electrical stimulus is generated in a special part of the heart muscle called the sinus node. It's also called the sino atrial node (SA node). The sinus node is a small mass of special tissue in the right upper chamber of the heart (right atrium). In an adult, the sinus node sends out a regular electrical pulse 60 to 100 times per minute. This electrical pulse travels down through the conduction pathways and causes the heart's lower chambers (ventricles) to contract and pump out blood. The right and left atria are stimulated first and contract to push blood from the atria into the ventricles. The ventricles then contract to push blood out into the blood vessels of the body.

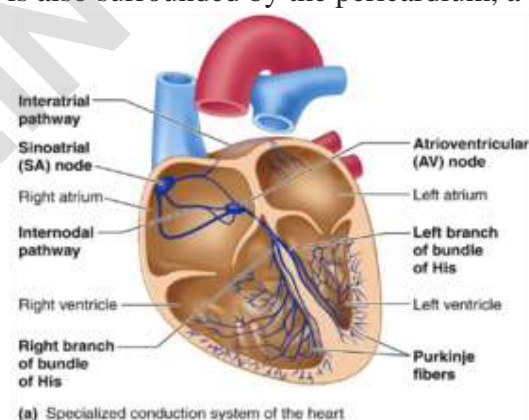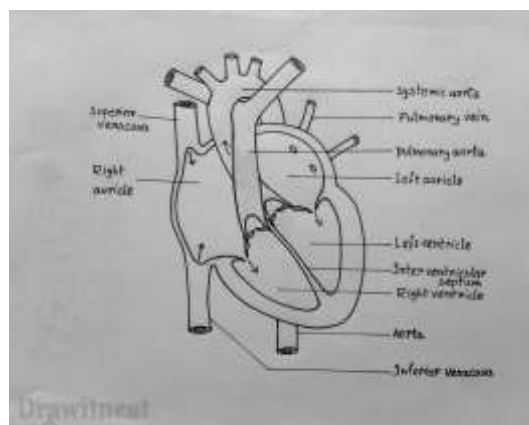

ELECTRICAL SIGNALING – ECG MONITORING AND HEART RELATED ISSUES

The heart's pumping action is controlled by electrical signaling, which generates the rhythm of the heartbeat. This electrical signaling can be monitored using an electrocardiogram (ECG), which records the electrical activity of the heart and provides important information about the heart's function.

An ECG measures the electrical signals produced by the heart as it beats and generates a trace or waveform that reflects the electrical activity of the heart. This trace can be used to diagnose heart conditions and monitor the heart's function.

Some common heart-related issues that can be diagnosed or monitored using an ECG include:

- ❖ **Arrhythmias:** Abnormalities in the heart's rhythm or rate can be detected using an ECG.




DEPARTMENT OF CHEMISTRY - SAI VIDYA INSTITUTE OF TECHNOLOGY

- ❖ **Heart disease:** Changes in the heart's electrical activity can indicate the presence of heart disease, such as coronary artery disease or heart attacks.
- ❖ **Heart attack:** An ECG can help diagnose a heart attack by detecting changes in the heart's electrical activity that indicate a lack of blood flow to the heart.

Overall, the ECG is a useful tool for diagnosing and monitoring heart-related issues and helps to provide important information about the heart's function and health.

Reasons for Blockages of Blood Vessels

- ❖ **High cholesterol levels:** Excessive amounts of low-density lipoprotein (LDL) cholesterol in the blood can lead to the formation of plaque in the blood vessels, which can narrow or block them.
- ❖ **High blood pressure:** Over time, high blood pressure can cause damage to the blood vessels, leading to the formation of plaque and blockages.
- ❖ **Smoking:** Smoking can damage the inner walls of blood vessels and promote the buildup of plaque, leading to blockages.
- ❖ **Diabetes:** People with uncontrolled diabetes are at a higher risk of developing blockages in their blood vessels, due to damage to the blood vessels from high levels of glucose.
- ❖ **Age:** As people age, the blood vessels can become stiff and less flexible, increasing the risk of blockages.
- ❖ **Genetics:** Some people may be predisposed to developing blockages in their blood vessels due to genetic factors.
- ❖ **Poor diet:** A diet high in saturated fats, trans fats, and cholesterol can increase the risk of developing blockages in the blood vessels.

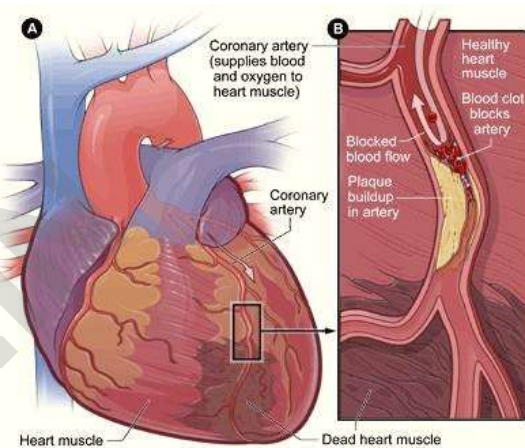

DESIGN OF STENTS

Stents are small, metal mesh devices that are used to treat blockages in blood vessels. They are typically used in procedures such as angioplasty, where a balloon catheter is used to open up a blocked blood vessel and a stent is placed to keep it open.


The design of stents can vary depending on the type of stent and the specific medical condition it is used to treat. Some common design features of stents include:

Shape: Stents can be designed in a variety of shapes, including cylindrical, helical, and spiraled, to match the shape of the blood vessel and provide adequate support.

Material: Stents can be made of different materials, including stainless steel, cobalt- chromium, and nitinol (a type of metal that is flexible and can return to its original shape after being expanded).

Coating: Stents can be coated with different materials to prevent blood clots from forming and reduce

Balloon Angioplasty and Stents

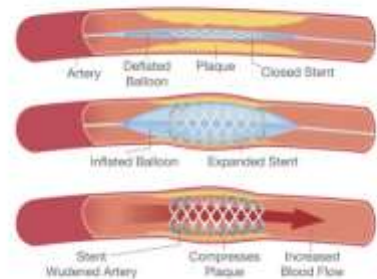

the risk of restenosis (recurrent blockage of the blood vessel).

Expansion mechanism: Stents can be designed to expand in different ways, such as by balloon inflation or self-expansion, depending on the type of stent and the specific medical condition it is used to treat.


Overall, the design of stents plays an important role in their effectiveness and safety. Stents must be designed to provide adequate support to the blood vessel, prevent restenosis, and minimize the risk of complications such as blood clots.

PACE MAKERS

A pacemaker is a small device that is surgically implanted in the chest to regulate the heartbeat. It is used to treat heart rhythm disorders, such as bradycardia (a slow heartbeat) or arrhythmias (abnormal heart rhythms), by delivering electrical impulses to the heart to regulate its rhythm.

The basic design of a pacemaker consists of

- ❖ **Generator:** The generator is the main component of the pacemaker and contains a battery and electronic circuitry to generate and control the electrical impulses.
- ❖ **Leads:** Leads are thin wires that connect the generator to the heart and carry the electrical impulses from the generator to the heart.
- ❖ **Electrodes:** The electrodes are located at the end of the leads and are used to deliver the electrical impulses to the heart.

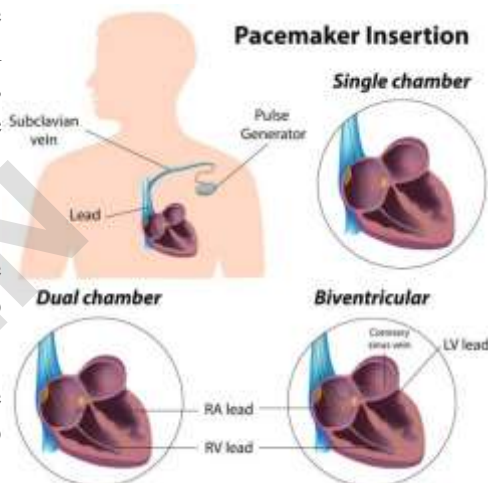

Pacemakers can be designed to work in different ways, including:

- ❖ **Single-chamber pacemaker:** A single-chamber pacemaker delivers electrical impulses to either the right atrium or the right ventricle of the heart to regulate its rhythm.
- ❖ **Dual-chamber pacemaker:** A dual-chamber pacemaker delivers electrical impulses to both the right atrium and the right ventricle of the heart to regulate its rhythm.
- ❖ **Biventricular pacemaker:** A biventricular pacemaker delivers electrical impulses to both ventricles of the heart to coordinate their contractions and improve heart function in people with heart failure.

Construction of a Pacemaker

The construction of a pacemaker involves the use of high-quality materials and specialized manufacturing processes to ensure their safety and reliability. Materials used in the construction of pacemakers include:


- ❖ **Medical-grade plastics:** Medical-grade plastics, such as polycarbonate, are used to construct the exterior of the device and to provide insulation and protection for the internal components.
- ❖ **Metals:** Metals, such as stainless steel and titanium, are used in the construction of the leads and electrodes to ensure their durability and long-lasting performance.
- ❖ **Electronic components:** Electronic components, such as microprocessors, batteries, and capacitors, are used to control the delivery of the electrical impulses and to provide power to the device.
- ❖ **Adhesives:** Adhesives, such as cyanoacrylate and epoxy, are used to secure the components of the device and to provide insulation and protection for the internal components.

DEFIBRILLATORS

A defibrillator is a medical device that delivers an electric shock to the heart to restore its normal rhythm in cases of cardiac arrest or other life-threatening heart rhythm disorders. Defibrillators can be external (placed on the chest) or internal (implanted within the body).

The basic design of a defibrillator consists of:

- ❖ **Power source:** The power source, typically a battery, provides energy to deliver the electric shock to the heart.
- ❖ **Electrodes:** The electrodes are placed on the chest and deliver the electric shock to the heart.
- ❖ **Circuitry:** The circuitry in the defibrillator controls the delivery of the electric shock, including the timing, strength, and duration of the shock.
- ❖ **Display:** A display on the defibrillator provides information about the heart rhythm, battery life, and other relevant information.

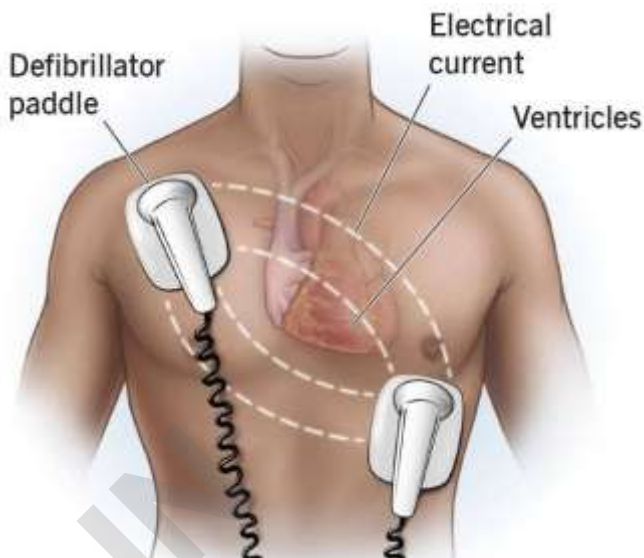

Automated External Defibrillators

External defibrillators, also known as automated external defibrillators (AEDs), are designed for use by laypeople and are commonly found in public places such as airports, shopping centers, and schools. They are relatively simple in design and typically have voice prompts and visual cues to guide the user through the process of delivering the electric shock.

Implantable Cardioverter Defibrillators

Internal defibrillators, also known as implantable cardioverter defibrillators (ICDs), are surgically implanted within the body and are used to treat people with a high risk of sudden cardiac arrest. They are typically more complex in design, including features such as continuous monitoring of the heart rhythm, and automatic delivery of shocks when necessary.

Construction of defibrillators

The construction of defibrillators involves the use of high-quality materials and specialized manufacturing processes to ensure their safety and reliability.

Materials Used

Materials used in the construction of defibrillators include:

- ❖ **Medical-grade plastics:** Medical-grade plastics, such as polycarbonate, are used to construct the exterior of the device and to provide insulation and protection for the internal components.
- ❖ **Metals:** Metals, such as stainless steel and titanium, are used in the construction of the leads and electrodes to ensure their durability and long-lasting performance.
- ❖ **Electronic components:** Electronic components, such as microprocessors, batteries, capacitors, and high-voltage transformers, are used to control the delivery of the electrical impulses and to provide power to the device.

DEPARTMENT OF CHEMISTRY - SAI VIDYA INSTITUTE OF TECHNOLOGY

- ❖ **Adhesives:** Adhesives, such as cyanoacrylate and epoxy, are used to secure the components of the device and to provide insulation and protection for the internal components.

The manufacturing process for defibrillators includes multiple quality control measures to ensure their safety and reliability. This includes testing of individual components and final assembly testing to verify the proper operation of the device before it is released for use.

Basic Design

The basic design of a defibrillator consists of:

- ❖ **Power source:** The power source, typically a battery, provides energy to deliver the electrical impulses to the heart.
- ❖ **Electrodes:** The electrodes are placed on the chest and deliver the electrical impulses to the heart to restore normal rhythm.
- ❖ **Circuitry:** The circuitry in the defibrillator controls the delivery of the electrical impulses, including the timing, strength, and duration of the impulses.
- ❖ **Display:** A display on the defibrillator provides information about the heart rhythm, battery life, and other relevant information.


Lungs as Purification System

The lung purifies air by removing harmful substances and adding oxygen to the bloodstream. The process of purifying air in the lungs can be described as follows:

- ❖ **Filtration:** The nose and mouth serve as a first line of defense against harmful substances in the air, such as dust, dirt, and bacteria. The tiny hairs in the nose, called cilia, and the mucus produced by the respiratory system trap these substances and prevent them from entering the lungs.
- ❖ **Moisturization:** The air is also humidified as it passes over the moist lining of the respiratory tract, which helps to keep the airways moist and prevent them from drying out.
- ❖ **Gas Exchange:** Once the air reaches the alveoli, the gas exchange process occurs, where oxygen diffuses across the thin alveolar and capillary walls into the bloodstream, and carbon dioxide diffuses in the opposite direction, from the bloodstream into the alveoli to be exhaled. This process ensures that the bloodstream is supplied with fresh, oxygen-rich air, while waste carbon dioxide is removed from the body.

Architecture of Lungs as Purification System

- ❖ **Trachea:** The trachea is the main airway that leads from the larynx (voice box) to the lungs. It is lined with cilia and mucus-secreting glands that help to filter out harmful substances and trap them in the mucus.
- ❖ **Bronchi:** The trachea branches into two main bronchi, one for each lung. The bronchi are larger airways that continue to branch into smaller airways called bronchioles.
- ❖ **Bronchioles:** The bronchioles are smaller airways that eventually lead to the alveoli. They are surrounded by tiny air sacs called alveoli, which are the sites of gas exchange.
- ❖ **Alveoli:** The alveoli are tiny air sacs that are lined with a network of capillaries. This close proximity of the alveoli and capillaries allows for efficient diffusion of oxygen and carbon dioxide between the air in the alveoli and the bloodstream.

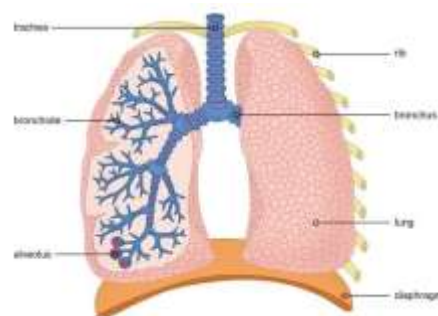

DEPARTMENT OF CHEMISTRY - SAI VIDYA INSTITUTE OF TECHNOLOGY

- ❖ **Diaphragm:** Dome-shaped muscle located below lungs, upon inhalation it contracts, which creates a vacuum and pulls air into the lungs. Upon exhalation, it relaxes and returns to its dome like shape and air is forced out of the lungs.

GAS EXCHANGE MECHANISM OF LUNG

The gas exchange mechanism in the lung involves the transfer of oxygen from the air in the alveoli to the bloodstream, and the transfer of carbon dioxide from the bloodstream to the air in the alveoli. This process is known as diffusion and occurs due to differences in partial pressures of oxygen and carbon dioxide.

Oxygen Diffusion: The partial pressure of oxygen in the air in the alveoli is higher than the partial pressure of oxygen in the bloodstream. This difference creates a gradient that causes oxygen to diffuse from the alveoli into the bloodstream, where it binds to hemoglobin in red blood cells to form oxyhemoglobin.

Carbon Dioxide Diffusion: The partial pressure of carbon dioxide in the bloodstream is higher than the partial pressure of carbon dioxide in the air in the alveoli. This difference creates a gradient that causes carbon dioxide to diffuse from the bloodstream into the alveoli, where it is exhaled.

SPIROMETRY

Spirometry is a diagnostic test that measures the function of the lungs by measuring the amount and flow rate of air that can be exhaled. The test is commonly used to diagnose lung conditions such as asthma, chronic obstructive pulmonary disease (COPD), and interstitial lung disease.

Principle: The principle behind spirometry is to measure the volume of air that can be exhaled from the lungs in a given time period. By measuring the volume of air exhaled, spirometry can provide information about the functioning of the lungs and the ability of the lungs to move air in and out.

Working: Spirometry is performed using a spirometer, a device that consists of a mouth pipe, a flow sensor, and a volume sensor. The patient is asked to take deep breath and exhale as much air as possible into the spirometer. The spirometer measures the volume and flow rate of the exhaled air. The volume of air exhaled is displayed on a graph called a flow-volume loop, which provides information about the lung function.

Based on the spirometry flow graph produced, the healthiness and abnormality of the lungs determined.

For example, decrease in the volume of air exhaled or a decrease in the flow rate of the exhaled air into the spirometry indicate restriction in the airways, which can be a sign of a lung problem such as asthma or COPD.

Abnormal Lung Physiology – COPD

Abnormal lung physiology refers to any deviation from the normal functioning of the respiratory system. This can be caused by a variety of factors, including diseases, injuries, or genetic conditions.


Asthma: A chronic inflammatory disease that causes the airways to narrow, making it difficult to breathe.

Chronic obstructive pulmonary disease (COPD): A progressive lung disease that makes it hard to breathe and can include conditions such as emphysema and chronic bronchitis.

Pulmonary fibrosis: A disease in which scar tissue builds up in the lungs, making it difficult to breathe and reducing lung function.

Pneumonia: An infection in the lungs that can cause inflammation and fluid buildup in the air sacs.

Pulmonary embolism: A blockage in one of the pulmonary arteries, usually by a blood clot, which can cause lung

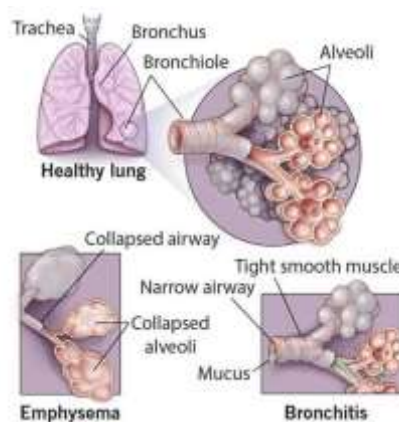

DEPARTMENT OF CHEMISTRY - SAI VIDYA INSTITUTE OF TECHNOLOGY

damage and reduce oxygen flow to the body.

Lung cancer: A type of cancer that originates in the lung and can impair lung function by interfering with normal air flow and oxygen exchange.

Treatment for abnormal lung physiology depends on the underlying cause and may include medications, lifestyle changes, or surgery.

Chronic Obstructive Pulmonary Disease

Chronic Obstructive Pulmonary Disease (COPD) is a group of progressive lung diseases that cause breathing difficulties. It's characterized by persistent airflow limitation that is not fully reversible. The two main forms of COPD are chronic bronchitis and emphysema.

In COPD, the airways and small air sacs (alveoli) in the lungs become damaged or blocked, leading to difficulty in exhaling air. This results in a decrease in lung function, leading to shortness of breath, wheezing, and coughing. Over time, these symptoms can get worse and limit a person's ability to perform everyday activities.


The primary cause of COPD is long-term exposure to irritants such as tobacco smoke, air pollution, and dust. Other risk factors include a history of frequent lung infections, a family history of lung disease, and exposure to second-hand smoke.

There is no cure for COPD, but treatment can help manage the symptoms and slow the progression of the disease. Treatment options include medication, such as bronchodilators and steroids, oxygen therapy, and lung rehabilitation. In severe cases, surgery may also be an option. In addition, quitting smoking and avoiding exposure to irritants is crucial in managing COPD.

Ventilators

Ventilators are medical devices used to assist or control breathing in individuals who are unable to breathe adequately on their own. They are commonly used in the treatment of acute

respiratory failure, which can occur as a result of a variety of conditions such as pneumonia, severe asthma, and chronic obstructive pulmonary disease (COPD).

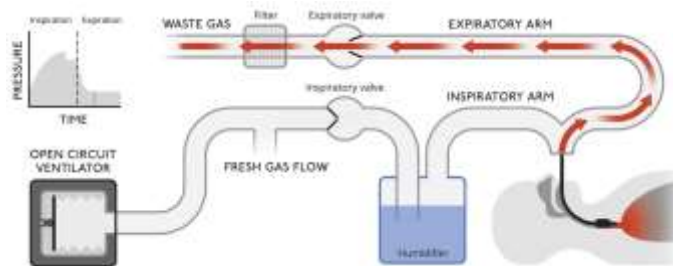

There are several different types of ventilators, including volume-controlled ventilators, pressure-controlled ventilators, and bilevel positive airway pressure (BiPAP) devices. The type of ventilator used depends on the patient's individual needs and the type of respiratory failure being treated.

Ventilators work by delivering pressurized air or oxygen into the lungs through a breathing tube or mask. The pressure can be adjusted to match the patient's needs and to help maintain adequate oxygen levels in the blood.


While ventilators can be lifesaving for individuals with acute respiratory failure, they also come with potential risks and complications. For example, prolonged use of a ventilator can increase the risk of ventilator-associated pneumonia, and patients may experience discomfort or pain from the breathing tube.

The use of ventilators is carefully monitored and managed by healthcare professionals to ensure that the patient receives the appropriate level of support while minimizing potential risks and complications.

Heart-Lung Machine

A heart-lung machine, also known as a cardiopulmonary bypass machine, is a device used in cardiovascular surgery to temporarily take over the functions of the heart and lungs. The heart-lung machine is used during open-heart surgery, such as coronary artery bypass graft (CABG) surgery and valve replacement surgery, to support the patient's circulatory and respiratory functions while the heart is stopped.

The heart-lung machine works by circulating blood outside of the body through a series of tubes and pumps. Blood is taken from the body, oxygenated, and then returned to the body. This allows the heart to be stopped during the surgery without causing any harm to the patient.

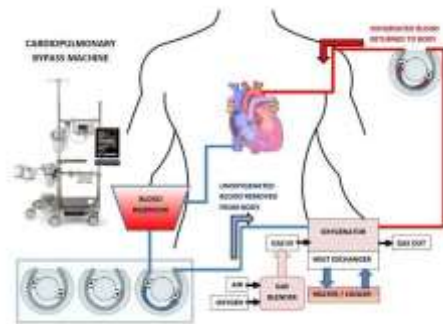


The use of a heart-lung machine during surgery carries some risks, including the potential for blood clots, bleeding, and infections. Additionally, there may be some long-term effects on the body, such as cognitive decline, that are not yet fully understood. However, the use of a heart-lung machine has revolutionized the field of cardiovascular surgery, allowing for more complex procedures to be performed and greatly improving patient outcomes.

Kidney as a Filtration System

The kidney is a complex organ that acts as a filtration system for the body. It removes waste and excess fluid from the bloodstream and maintains a delicate balance of electrolytes, hormones, and other substances that are critical for the body's normal functioning.

The kidney also plays an important role in regulating blood pressure by secreting the hormone renin, which helps control the balance of fluid and electrolytes in the body. It also regulates red blood cell production and the levels of various minerals in the blood, such as calcium and phosphorus.

Without the kidney, waste and excess fluid would accumulate in the body, leading to serious health problems.

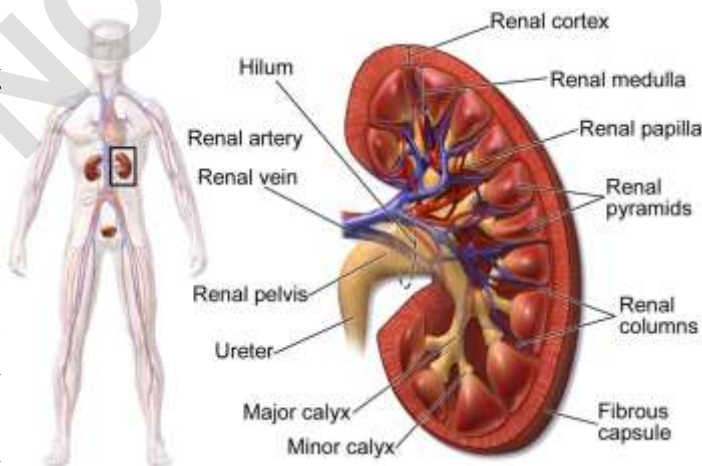

Architecture of Kidney

Two bean-shaped organs, each about the size of a fist located just below the rib cage, one on each side of your spine.


Healthy kidneys filter about a half cup of blood every minute, removing wastes and extra water to make urine.

Composed of functional units called nephrons, basic structural & functional units.

Each kidney contains approximately one million nephrons, and each nephron performs the functions of filtration, reabsorption and secretion.

The kidney is composed of functional units called nephrons, which are the basic structural and functional units of the kidney. Each kidney contains approximately one million nephrons, and each nephron performs the functions of filtration, reabsorption, and secretion.

The nephron is comprised of several key structures:

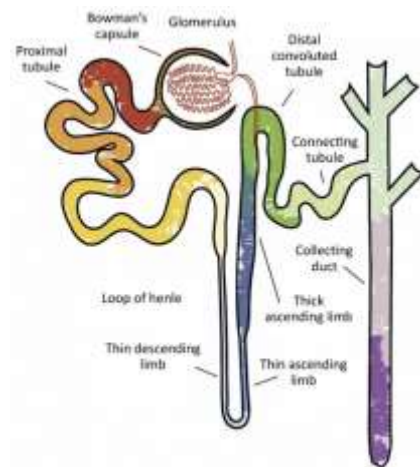

DEPARTMENT OF CHEMISTRY - SAI VIDYA INSTITUTE OF TECHNOLOGY

- Bowman's capsule: This is a cup-shaped structure that surrounds the glomerulus and filters waste and excess fluid from the bloodstream into the renal tubule.
- Glomerulus: A network of tiny blood vessels within the Bowman's capsule that filters waste and excess fluid from the bloodstream.
- Proximal convoluted tubule: A segment of the renal tubule that reabsorbs important substances, such as glucose, amino acids, and electrolytes, back into the bloodstream.
- Loop of Henle: A U-shaped segment of the renal tubule that is critical for the reabsorption of ions and water.
- Distal convoluted tubule: A segment of the renal tubule that regulates the levels of electrolytes and other important substances in the bloodstream.
- Collecting duct: A series of ducts that collect the filtrate from the renal tubules and transport it to the renal pelvis, where it drains into the ureter and eventually into the bladder.

The nephrons are surrounded by a network of blood vessels, including the afferent arteriole and the efferent arteriole, which bring blood into and out of the glomerulus, respectively. The filtrate produced by the nephron passes through the renal tubules, where it is modified by reabsorption and secretion, before being eliminated from the body as urine.

Mechanism of Filtration – Urine Formation

- Blood enters the kidney through the renal arteries and flows into tiny filtering units called glomeruli.
- At the glomerulus, the pressure in the blood vessels causes a portion of the plasma and dissolved substances to filter out and enter a structure called Bowman's capsule.
- In Bowman's capsule, the filtrate is then transferred into the renal tubules, which are the main filtering units of the kidneys.
- In the renal tubules, the filtrate passes through a series of specialized cells, such as proximal tubular cells and distal tubular cells, which reabsorb important substances such as glucose, amino acids, and electrolytes back into the bloodstream.
- At the same time, the renal tubules secrete waste products, such as urea and creatinine, back into the filtrate.
- Finally, the filtered fluid, now known as urine, is transported through the renal pelvis and ureters to the bladder, where it is eventually eliminated from the body.

This process of filtration, reabsorption, and secretion helps to maintain the proper balance of fluids and electrolytes in the body, as well as to remove waste and excess substances.