Master's degree in Computer Engineering for Robotics and Smart Industry

Advanced control systems

Report on the assignments given during the 2022/2023 a.y.

Author: Lorenzo Busellato, VR472249
email: lorenzo.busellato_02@studenti.univr.it

UNIVERSITÀ di VERONA
Dipartimento di INFORMATICA

Contents

1 Assignment 1

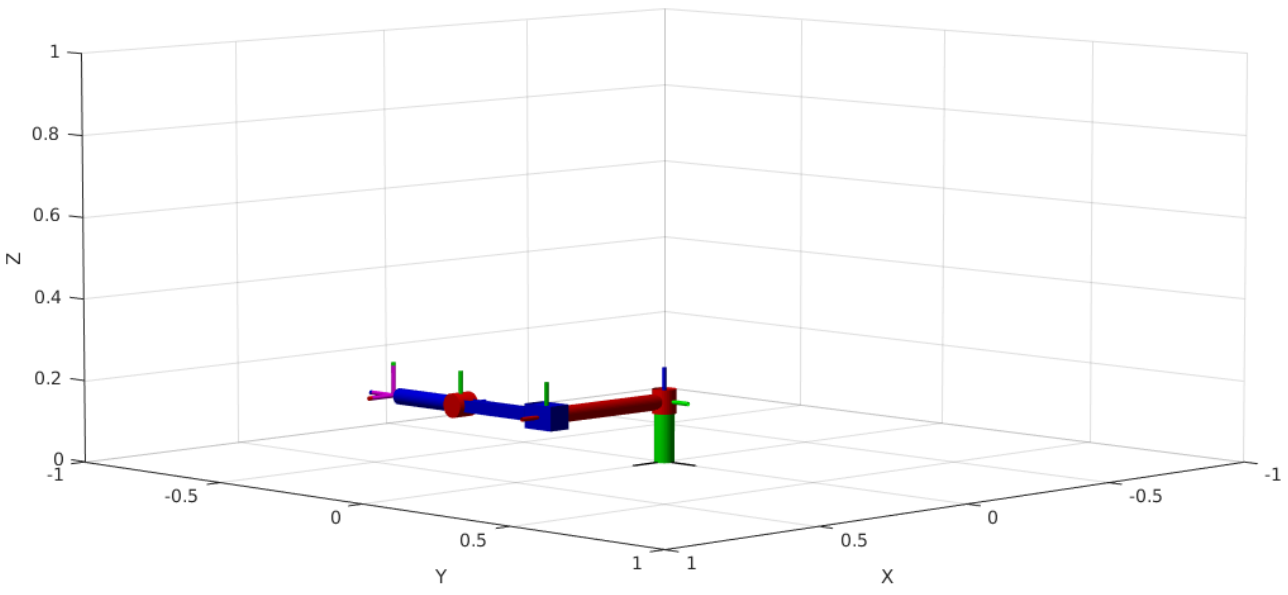

Figure 1: Visualization of the URDF of the PRP robot in the home configuration ($q_1 = 0, q_2 = 0, \theta_3 = 0$)

1.1 Denavit-Hartenberg parameters

First of all, reference frames were assigned to each joint according to the DH convention:

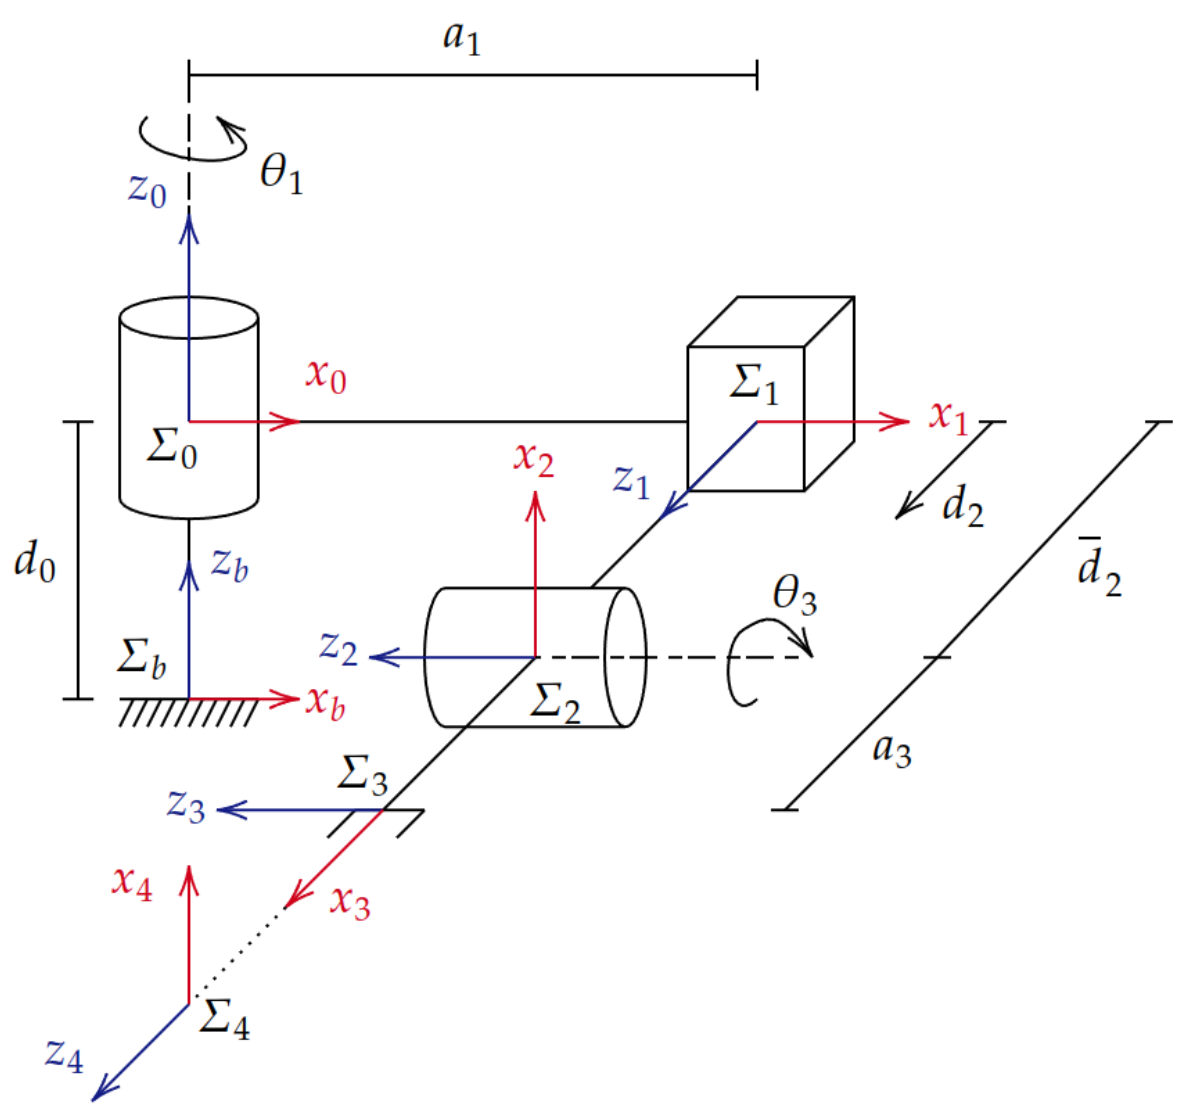

Figure 2: Reference frames assigned with the DH convention

Note that the DH frames do not correspond with the frames of the URDF model.
Then the DH parameter table was populated:

	a_i	α_i	d_i	θ_i
0	0	0	d_0	0
1	a_1	$\frac{\pi}{2}$	0	$q_1 = \theta_1$
2	0	$-\frac{\pi}{2}$	$(q_2 = d_2) + \overline{d}_2$	$\frac{\pi}{2}$
3	a_3	0	0	$(q_3 = \theta_3) - \frac{\pi}{2}$
4	0	$\frac{\pi}{2}$	0	$\frac{\pi}{2}$

The first row is the fixed offset in the z_b direction between world and frame Σ_0, while the last row is the fixed rotation that aligns the z axis of the end-effector to the approach direction.

Using the DH parameters, the transformation matrices between the frames were then computed. The transformation matrix between frame i and frame $i-1$ is in the form:

$$T_{i-1}^{i} = \begin{bmatrix} \cos(\theta_i) & -\sin(\theta_i)\cos(\alpha_i) & \sin(\theta_i)\sin(\alpha_i) & a_i\cos(\theta_i) \\ \sin(\theta_i) & \cos(\theta_i)\cos(\alpha_i) & -\cos(\theta_i)\sin(\alpha_i) & a_i\sin(\theta_i) \\ 0 & \sin(\alpha_i) & \cos(\alpha_i) & d_i \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

The computed transformation matrices are then:

$$T_b^0 = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & d_0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \qquad T_0^1 = \begin{bmatrix} C_1 & 0 & S_1 & a_1C_1 \\ S_1 & 0 & -C_1 & a_1S_1 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \qquad T_1^2 = \begin{bmatrix} 0 & 0 & -1 & 0 \\ 1 & 0 & 0 & 0 \\ 0 & -1 & 0 & q_2+\overline{d}_2 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$T_2^3 = \begin{bmatrix} C\left(q_3-\frac{\pi}{2}\right) & -S\left(q_3-\frac{\pi}{2}\right) & 0 & a_3C\left(q_3-\frac{\pi}{2}\right) \\ S\left(q_3-\frac{\pi}{2}\right) & C\left(q_3-\frac{\pi}{2}\right) & 0 & a_3S\left(q_3-\frac{\pi}{2}\right) \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} S_3 & C_3 & 0 & a_3S_3 \\ -C_3 & S_3 & 0 & -a_3C_3 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \qquad T_3^4 = \begin{bmatrix} 0 & 0 & 1 & 0 \\ 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

where C_i and S_i denote respectively $\cos(q_i)$ and $\sin(q_i)$.

1.2 Direct kinematics

The direct kinematics of the manipulator are obtained by chaining the above transformation matrices, thus obtaining a global transformation matrix from the end-effector to the base of the manipulator:

$$T_b^4 = T_b^0T_0^1T_1^2T_2^3T_3^4 = \underbrace{\begin{bmatrix} C_1 & 0 & S_1 & a_1C_1 \\ S_1 & 0 & -C_1 & a_1S_1 \\ 0 & 1 & 0 & d_0 \\ 0 & 0 & 0 & 1 \end{bmatrix}}_{T_b^1} T_1^2T_2^3T_3^4 = \underbrace{\begin{bmatrix} 0 & -S_1 & -C_1 & (q_2+\overline{d}_2)S_1 + a_1C_1 \\ 0 & C_1 & -S_1 & -(q_2+\overline{d}_2)C_1 + a_1S_1 \\ 1 & 0 & 0 & d_0 \\ 0 & 0 & 0 & 1 \end{bmatrix}}_{T_b^2} T_2^3T_3^4$$

$$= \underbrace{\begin{bmatrix} S_1C_3 & -S_1S_3 & -C_1 & (q_2+\overline{d}_2)S_1 + a_1C_1 + a_3S_1C_3 \\ -C_1C_3 & C_1S_3 & -S_1 & -(q_2+\overline{d}_2)C_1 + a_1S_1 - a_3C_1C_3 \\ S_3 & C_3 & 0 & d_0 + a_3S_3 \\ 0 & 0 & 0 & 1 \end{bmatrix}}_{T_b^3} T_3^4$$

$$= \begin{bmatrix} -S_1S_3 & -C_1 & S_1C_3 & (q_2+\overline{d}_2)S_1 + a_1C_1 + a_3S_1C_3 \\ C_1S_3 & -S_1 & -C_1C_3 & -(q_2+\overline{d}_2)C_1 + a_1S_1 - a_3C_1C_3 \\ C_3 & 0 & S_3 & d_0 + a_3S_3 \\ 0 & 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} R_b^4 & p_4 \\ \overline{0} & 1 \end{bmatrix}$$

1.3 Inverse kinematics

From the direct kinematics, the position of the end-effector is given by:

$$p_4 = \begin{pmatrix} p_{4x} \\ p_{4y} \\ p_{4z} \end{pmatrix} = \begin{pmatrix} (q_2+\overline{d}_2)S_1 + a_1C_1 + a_3S_1C_3 \\ -(q_2+\overline{d}_2)C_1 + a_1S_1 - a_3C_1C_3 \\ d_0 + a_3S_3 \end{pmatrix}$$

Therefore an expression for q_3 can immediately be derived:

$$p_{4z} = d_0 + a_3S_3 \implies S_3 = \frac{p_{4z}-d_0}{a_3}, C_3 = \pm\sqrt{1-S_3^2} = \pm\sqrt{\frac{a_3^2-(p_{4z}-d_0)^2}{a_3^2}} \implies q_3^{\pm} = \operatorname{atan2}(S_3, \pm C_3)$$

q_2 is determined by applying summing and squaring to the position of the origin of frame Σ_2:

$$p_2 = \begin{pmatrix} p_{2x} \\ p_{2y} \\ p_{2z} \end{pmatrix} = \begin{pmatrix} (q_2+\overline{d}_2)S_1 + a_1C_1 \\ -(q_2+\overline{d}_2)C_1 + a_1S_1 \\ d_0 \end{pmatrix}$$

$$p_{2x}^2+p_{2y}^2 = S_1^2(q_2+\overline{d}_2)^2+a_1^2C_1^2+\cancel{2a_1(q_2+\overline{d}_2)S_1C_1}+C_1^2(q_2+\overline{d}_2)^2+a_1^2S_1^2-\cancel{2a_1(q_2+\overline{d}_2)S_1C_1} = \\ = (q_2+\overline{d}_2)^2+a_1^2$$

Therefore q_2 is given by the solution of the quadratic equation:

$$q_2^2+2\overline{d}_2q_2+a_2-p_{2x}^2-p_{2y}^2=0$$

which is:

$$q_{2,12} = -\frac{\cancel{2}\overline{d}_2 \pm \sqrt{\cancel{4}\cancel{\overline{d}_2^2}-\cancel{4}(a_1^2+\cancel{\overline{d}_2}-p_{2x}^2-p_{2y}^2)}}{\cancel{2}} = -\overline{d}_2 \pm \sqrt{p_{2x}^2+p_{2y}^2-a_1^2}$$

To choose the solution, both are computed and the correct one will be the one that satisfies joint limits.

To choose the correct sign for q_3, q_2 is recomputed by summing and squaring the x and y components of p_3:

$$\begin{aligned} p_{3x}^2+p_{3y}^2 &= S_1^2(q_2+\overline{d}_2)^2+a_1^2C_1^2+a_3^2S_1^2C_3^2+\cancel{2a_1(q_2+\overline{d}_2)S_1C_1}+2a_3(q_2+\overline{d}_2)S_1^2C_3+\cancel{2a_1a_3S_1C_1C_3} \\ &+C_1^2(q_2+\overline{d}_2)^2+a_1^2S_1^2+a_3^2C_1^2C_3^2-\cancel{2a_1(q_2+\overline{d}_2)S_1C_1}+2a_3(q_2+\overline{d}_2)C_1^2C_3-\cancel{2a_1a_3S_1C_1C_3} = \\ &= (q_2+\overline{d}_2)^2+a_1^2+a_3^2C_3^2+2a_3(q_2+\overline{d}_2)C_3 \end{aligned}$$

and therefore:

$$q_{2,12} = -a_3C_3-\overline{d}_2 \pm \sqrt{p_{4x}^2+p_{4y}^2-a_1^2}$$

By computing the four possible solutions and checking which one is equal to the one obtained previously, it is possible to determine the correct sign for C_3 and therefore the correct value for q_3.

Finally, q_1 is determined by solving the system of equations:

$$\begin{cases} p_{2x} = (q_2+\overline{d}_2)S_1+a_1C_1 \\ p_{2y} = -(q_2+\overline{d}_2)C_1+a_1S_1 \end{cases}$$

in the unknowns C_1 and S_1. The system yields:

$$C_1 = \frac{a_1p_{2x}-(q_2+\overline{d}_2)p_{2y}}{(q_2+\overline{d}_2)^2+a_1^2}, S_1 = \frac{p_{2x}-a_1C_1}{(q_2+\overline{d}_2)} \implies q_1 = \operatorname{atan2}(S_1, C_1)$$

For the orientation o_4 of the end-effector, the angles α, β and γ can be derived by equating the rotation matrix R_b^4 to the rotation matrix that expresses a ZXZ Euler angle rotation:

$$\begin{bmatrix} -S_1S_3 & -C_1 & S_1C_3 \\ C_1S_3 & -S_1 & -C_1C_3 \\ C_3 & 0 & S_3 \end{bmatrix} = \begin{bmatrix} C_\alpha C_\gamma - C_\beta S_\alpha S_\gamma & -C_\alpha S_\gamma - C_\beta C_\gamma S_\alpha & S_\alpha S_\beta \\ S_\alpha C_\gamma + C_\beta C_\alpha S_\gamma & -S_\alpha S_\gamma - C_\beta C_\gamma C_\alpha & -C_\alpha S_\beta \\ S_\beta S_\gamma & C_\gamma S_\beta & C_\beta \end{bmatrix}$$

$$\begin{cases} S_\alpha S_\beta = S_1C_3, -C_\alpha S_\beta = -C_1C_3 \implies S_\alpha = S_1, C_\alpha = C_1 & \implies \alpha = q_1 \\ C_\beta = S_3 & \implies \beta = \frac{\pi}{2}-q_3 \\ S_\beta S_\gamma = C_3 \implies S_\gamma = 1 & \implies \gamma = \frac{\pi}{2} \end{cases} \implies o_4 = \begin{pmatrix} \alpha \\ \beta \\ \gamma \end{pmatrix} = \begin{pmatrix} q_1 \\ \frac{\pi}{2}-q_3 \\ \frac{\pi}{2} \end{pmatrix}$$

1.4 Analytical Jacobian

The lines of the analytical Jacobian are the gradients of the pose (position and orientation) of the end-effector with respect to the joint variables:

$$\begin{aligned} \nabla p_x &= \begin{bmatrix} \frac{\partial p_x}{\partial q_1} & \frac{\partial p_x}{\partial q_2} & \frac{\partial p_x}{\partial q_3} \end{bmatrix} = \begin{bmatrix} (q_2+\overline{d}_2)C_1-a_1S_1+a_3C_3C_1 & S_1 & -a_3S_1S_3 \end{bmatrix} \\ \nabla p_y &= \begin{bmatrix} \frac{\partial p_y}{\partial q_1} & \frac{\partial p_y}{\partial q_2} & \frac{\partial p_y}{\partial q_3} \end{bmatrix} = \begin{bmatrix} (q_2+\overline{d}_2)S_1+a_1C_1+a_3S_1C_3 & -C_1 & a_3S_1S_3 \end{bmatrix} \\ \nabla p_z &= \begin{bmatrix} \frac{\partial p_z}{\partial q_1} & \frac{\partial p_z}{\partial q_2} & \frac{\partial p_z}{\partial q_3} \end{bmatrix} = \begin{bmatrix} 0 & 0 & a_3C_3 \end{bmatrix} \\ \nabla \alpha &= \begin{bmatrix} \frac{\partial \alpha}{\partial q_1} & \frac{\partial \alpha}{\partial q_2} & \frac{\partial \alpha}{\partial q_3} \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 \end{bmatrix} \\ \nabla \beta &= \begin{bmatrix} \frac{\partial \beta}{\partial q_1} & \frac{\partial \alpha}{\partial q_2} & \frac{\partial \beta}{\partial q_3} \end{bmatrix} = \begin{bmatrix} 0 & 0 & -1 \end{bmatrix} \\ \nabla \gamma &= \begin{bmatrix} \frac{\partial \gamma}{\partial q_1} & \frac{\partial \gamma}{\partial q_2} & \frac{\partial \gamma}{\partial q_3} \end{bmatrix} = \begin{bmatrix} 0 & 0 & 0 \end{bmatrix} \end{aligned}$$

Therefore the analytical Jacobian is:

$$J_A = \begin{bmatrix} \nabla p_x \\ \nabla p_y \\ \nabla p_z \\ \nabla \alpha \\ \nabla \beta \\ \nabla \gamma \end{bmatrix} = \begin{bmatrix} (q_2+\overline{d}_2)C_1 - a_1S_1 + a_3C_3C_1 & S_1 & -a_3S_1S_3 \\ (q_2+\overline{d}_2)S_1 + a_1C_1 + a_3S_1C_3 & -C_1 & a_3C_1S_3 \\ 0 & 0 & a_3C_3 \\ 1 & 0 & 0 \\ 0 & 0 & -1 \\ 0 & 0 & 0 \end{bmatrix} \implies \begin{bmatrix} \dot{p}_3 \\ \dot{o}_3 \end{bmatrix} = J_A\dot{q}$$

where $\dot{q} = \begin{bmatrix} \dot{q}_1 & \dot{q}_2 & \dot{q}_3 \end{bmatrix}^T$.

1.5 Geometric Jacobian

The i-th column of the geometric Jacobian ($i = 0, \ldots, n-1$) is constructed as follows:

$$J_{Gi} = \begin{bmatrix} z_i \times (p_4 - p_i) \\ z_i \end{bmatrix} \quad \text{(revolute joint)} \qquad J_{Gi} = \begin{bmatrix} z_i \\ 0 \\ 0 \\ 0 \end{bmatrix} \quad \text{(prismatic joint)}$$

where p_e is the position of the end-effector, p_i is the position of frame i and z_i is the direction of the z axis of frame i, all with respect to the base frame.

So:

$$p_2 = \begin{bmatrix} S_1(q_2+\overline{d}_2) + a_1C_1 \\ -C_1(q_2+\overline{d}_2) + a_1S_1 \\ d_0 \end{bmatrix}, z_2 = \begin{bmatrix} -C_1 \\ -S_1 \\ 0 \end{bmatrix} \implies J_{G2} = \begin{bmatrix} -a_3S_1S_3 & a_3C_1C_3 & a_3C_3 & -C_1 & -S_1 & 0 \end{bmatrix}^T$$

$$p_1 = \begin{bmatrix} a_1C_1 \\ a_1S_1 \\ d_0 \end{bmatrix}, z_1 = \begin{bmatrix} S_1 \\ -C_1 \\ 0 \end{bmatrix} \implies J_{G1} = \begin{bmatrix} S_1 & -C_1 & 0 & 0 & 0 & 0 \end{bmatrix}^T$$

$$p_0 = \begin{bmatrix} 0 \\ 0 \\ d_0 \end{bmatrix}, z_0 = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} \implies J_{G0} = \begin{bmatrix} C_1(q_2+\overline{d}_2) - a_1S_1 + a_3C_1C_3 & S_1(q_2+\overline{d}_2) + a_1C_1 + a_3S_1C_3 & 0 & 0 & 0 & 1 \end{bmatrix}^T$$

Finally:

$$J_G = \begin{bmatrix} C_1(q_2+\overline{d}_2) - a_1S_1 + a_3C_1C_3 & S_1 & -a_3S_1S_3 \\ S_1(q_2+\overline{d}_2) + a_1C_1 + a_3S_1C_3 & -C_1 & a_3C_1C_3 \\ 0 & 0 & a_3C_3 \\ 0 & 0 & -C_1 \\ 0 & 0 & -S_1 \\ 1 & 0 & 0 \end{bmatrix} \implies \begin{bmatrix} \dot{p}_3 \\ \omega_3 \end{bmatrix} = J_G\dot{q}$$

As expected, the rows of the geometric Jacobian related to linear velocity are the same ones found in the analytical Jacobian.

1.6 Relationship between JG and JA

The geometric and analytical Jacobians are related by the following relationship:

$$J_G = T_A(\Phi)J_A = \begin{bmatrix} I & 0 \\ 0 & T(\Phi) \end{bmatrix} J_A$$

Therefore:

$$\begin{bmatrix} 0 & 0 & -C_1 \\ 0 & 0 & -S_1 \\ 1 & 0 & 0 \end{bmatrix} = T(\Phi) \begin{bmatrix} 1 & 0 & 0 \\ 0 & 0 & -1 \\ 0 & 0 & 0 \end{bmatrix} \implies T(\Phi) = \begin{bmatrix} 0 & 0 & -C_1 \\ 0 & 0 & -S_1 \\ 1 & 0 & 0 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 \\ 0 & 0 & -1 \\ 0 & 0 & 0 \end{bmatrix}^\dagger = \begin{bmatrix} 0 & C_1 & 0 \\ 0 & S_1 & 0 \\ 1 & 0 & 0 \end{bmatrix}$$

where † denotes the Moore-Penrose pseudoinverse.

2 Assignment 2

To compute both the kinetic and potential energy, the positions of the centres of mass of each link are needed. With respect to each frame Σ_i attached to link i:

$$p_{l_1}^1 = \begin{bmatrix} -\frac{h_1}{2} \\ 0 \\ 0 \end{bmatrix} \qquad p_{l_2}^2 = \begin{bmatrix} 0 \\ \frac{a_2}{2} \\ 0 \end{bmatrix} \qquad p_{l_3}^3 = \begin{bmatrix} -\frac{h_3}{2} \\ 0 \\ 0 \end{bmatrix}$$

Using the transformation matrices obtained with direct kinematics, the positions of the centres of mass with respect to the base frame Σ_b are:

$$p_{l_1} = R_b^1 p_{l_1}^1 + p_1 = \begin{bmatrix} \left(a_1 - \frac{h_1}{2}\right) C_1 \\ \left(a_1 - \frac{h_1}{2}\right) S_1 \\ d_0 \end{bmatrix} \qquad p_{l_2} = R_b^2 p_{l_2}^2 + p_2 = \begin{bmatrix} \left(q_2 + \overline{d}_2 - \frac{a_2}{2}\right) S_1 + a_1 C_1 \\ -\left(q_2 + \overline{d}_2 - \frac{a_2}{2}\right) C_1 + a_1 S_1 \\ d_0 \end{bmatrix}$$

$$p_{l_3} = R_b^3 p_{l_3}^3 + p_3 = \begin{bmatrix} (q_2 + \overline{d}_2) S_1 + a_1 C_1 + \left(a_3 - \frac{h_3}{2}\right) S_1 C_3 \\ -(q_2 + \overline{d}_2) C_1 + a_1 S_1 - \left(a_3 - \frac{h_3}{2}\right) C_1 C_3 \\ d_0 + \left(a_3 - \frac{h_3}{2}\right) S_3 \end{bmatrix}$$

2.1 Compute the kinetic energy

The total kinetic energy for an open-chain manipulator is:

$$\mathcal{T}(q, \dot{q}) = \frac{1}{2} \dot{q}^T B(q) \dot{q} \qquad B(q) = \sum_{i=1}^{n} (m_{l_i} (J_P^{l_i})^T J_P^{l_i} + (J_O^{l_i})^T R_b^i I_{l_i}^i {R_b^i}^T J_O^{l_i})$$

where $B(q)$ is the inertia matrix, $I_{l_i}^i$ are the inertia tensors with respect to Σ_i, $J_P^{l_i}$ and $J_O^{l_i}$ are the linear and angular partial Jacobian matrices and R_b^i are the rotation matrices that bring frame Σ_i to frame Σ_b.

The inertia tensors are obtained with Steiner's theorem:

$$\begin{aligned}
I_{l_1}^1 &= I_{l_1}^{C_1} + m_{l_1} S^T(p_{l_1}^1) S(p_{l_1}^1) \\
&= m_{l_1} \begin{bmatrix} \frac{1}{2}(r_1^2) & 0 & 0 \\ 0 & \frac{1}{2}(3r_1^2 + h_1^2) & 0 \\ 0 & 0 & \frac{1}{2}(3r_1^2 + h_1^2) \end{bmatrix} + m_{l_1} \begin{bmatrix} 0 & 0 & 0 \\ 0 & \frac{h_1^2}{4} & 0 \\ 0 & 0 & \frac{h_1^2}{4} \end{bmatrix} \\
&= \frac{1}{2} m_{l_1} \begin{bmatrix} r_1^2 & 0 & 0 \\ 0 & 3r_1^2 + \frac{3h_1^2}{2} & 0 \\ 0 & 0 & 3r_1^2 + \frac{3h_1^2}{2} \end{bmatrix} \\
I_{l_2}^2 &= I_{l_2}^{C_2} + m_{l_2} S^T(p_{l_2}^2) S(p_{l_2}^2) \\
&= m_{l_2} \begin{bmatrix} \frac{1}{12}(b_2^2 + c_2^2) & 0 & 0 \\ 0 & \frac{1}{12}(a_2^2 + c_2^2) & 0 \\ 0 & 0 & \frac{1}{12}(a_2^2 + b_2^2) \end{bmatrix} + m_{l_2} \begin{bmatrix} \frac{a_2^2}{4} & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & \frac{a_2^2}{4} \end{bmatrix} \\
&= \frac{1}{12} m_{l_2} \begin{bmatrix} 3a_2^2 + b_2^2 + c_2^2 & 0 & 0 \\ 0 & a_2^2 + c_2^2 & 0 \\ 0 & 0 & 4a_2^2 + b_2^2 \end{bmatrix} \\
I_{l_3}^3 &= I_{l_3}^{C_3} + m_{l_3} S^T(p_{l_3}^3) S(p_{l_3}^3) \\
&= m_{l_3} \begin{bmatrix} \frac{1}{2}(r_3^2) & 0 & 0 \\ 0 & \frac{1}{2}(3r_3^2 + h_3^2) & 0 \\ 0 & 0 & \frac{1}{2}(3r_3^2 + h_3^2) \end{bmatrix} + m_{l_3} \begin{bmatrix} 0 & 0 & 0 \\ 0 & \frac{h_3^2}{4} & 0 \\ 0 & 0 & \frac{h_3^2}{4} \end{bmatrix} \\
&= \frac{1}{2} m_{l_3} \begin{bmatrix} r_3^2 & 0 & 0 \\ 0 & 3r_3^2 + \frac{3}{2}h_3^2 & 0 \\ 0 & 0 & 3r_3^2 + \frac{3}{2}h_3^2 \end{bmatrix}
\end{aligned}$$

The links are assumed to be made up of an homogeneous material, specifically aluminium. Therefore the mass m_{l_i} of link i is $m_{l_i} = \rho V_{l_i}$, where $\rho = 2710\ kg/m^3$ is the density of aluminium and V_{l_i} is the volume of link i.

The partial Jacobian matrices are constructed as follows:

$$J_P^{l_i} = \begin{bmatrix} j_{P1}^{l_i} & \dots & j_{Pj}^{l_i} & 0 & \dots & 0 \end{bmatrix} \text{ where } j_{Pj}^{l_i} = \begin{cases} z_{j-1} & \text{prismatic joint} \\ z_{j-1} \times (p_{l_i} - p_{j-1}) & \text{revolute joint} \end{cases}$$

$$J_O^{l_i} = \begin{bmatrix} j_{O1}^{l_i} & \dots & j_{Oj}^{l_i} & 0 & \dots & 0 \end{bmatrix} \text{ where } j_{Oj}^{l_i} = \begin{cases} 0 & \text{prismatic joint} \\ z_{j-1} & \text{revolute joint} \end{cases}$$

where p_{j-1} is the position vector of the origin of frame Σ_{j-1} and z_{j-1} is the unit vector of axis z of frame Σ_{j-1}, all with respect of Σ_b.

$$J_P^{l_1} = \begin{bmatrix} j_{P1}^{l_1} & 0 & 0 \end{bmatrix} = \begin{bmatrix} -S_1\left(a_1 - \frac{h_1}{2}\right) & 0 & 0 \\ C_1\left(a_1 - \frac{h_1}{2}\right) & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}$$

$$j_{P1}^{l_1} = z_0 \times (p_{l_1} - p_0) = \begin{bmatrix} -S_1\left(a_1 - \frac{h_1}{2}\right) & C_1\left(a_1 - \frac{h_1}{2}\right) & 0 \end{bmatrix}^T$$

$$J_O^{l_1} = \begin{bmatrix} j_{O1}^{l_1} & 0 & 0 \end{bmatrix} = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 1 & 0 & 0 \end{bmatrix}$$

$$j_{O1}^{l_1} = z_0 = \begin{bmatrix} 0 & 0 & 1 \end{bmatrix}^T$$

$$J_P^{l_2} = \begin{bmatrix} j_{P1}^{l_2} & j_{P2}^{l_2} & 0 \end{bmatrix} = \begin{bmatrix} \left(d_2 + q_2 - \frac{a_2}{2}\right) C_1 & S_1 & 0 \\ \left(d_2 + q_2 - \frac{a_2}{2}\right) S_1 & -C_1 & 0 \\ 0 & 0 & 0 \end{bmatrix}$$

$$j_{P1}^{l_2} = z_0 \times (p_{l_2} - p_0) = \begin{bmatrix} \left(d_2 + q_2 - \frac{a_2}{2}\right) C_1 & \left(d_2 + q_2 - \frac{a_2}{2}\right) S_1 & 0 \end{bmatrix}^T$$

$$j_{P2}^{l_2} = z_1 = \begin{bmatrix} S_1 & -C_1 & 0 \end{bmatrix}^T$$

$$J_O^{l_2} = \begin{bmatrix} j_{O1}^{l_2} & j_{O2}^{l_2} & 0 \end{bmatrix} = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 1 & 0 & 0 \end{bmatrix}$$

$$j_{O1}^{l_2} = z_0 = \begin{bmatrix} 0 & 0 & 1 \end{bmatrix}^T$$

$$j_{O2}^{l_2} = \begin{bmatrix} 0 & 0 & 0 \end{bmatrix}^T$$

$$J_P^{l_3} = \begin{bmatrix} j_{P1}^{l_3} & j_{P2}^{l_3} & j_{P3}^{l_3} \end{bmatrix} = \begin{bmatrix} C_1C_3\left(a_3 - \frac{h_3}{2}\right) & S_1 & S_1S_3\left(a_3 - \frac{h_3}{2}\right) \\ S_1C_3\left(a_3 - \frac{h_3}{2}\right) & -C_1 & -C_1S_3\left(a_3 - \frac{h_3}{2}\right) \\ 0 & 0 & C_3\left(a_3 - \frac{h_3}{2}\right) \end{bmatrix}$$

$$j_{P1}^{l_3} = z_0 \times (p_{l_3} - p_0) = \begin{bmatrix} C_1C_3\left(a_3 - \frac{h_3}{2}\right) & S_1C_3\left(a_3 - \frac{h_3}{2}\right) & 0 \end{bmatrix}^T$$

$$j_{P2}^{l_3} = z_1 = \begin{bmatrix} S_1 & -C_1 & 0 \end{bmatrix}^T$$

$$j_{P3}^{l_3} = z_2 \times (p_{l_3} - p_2) = \begin{bmatrix} S_1S_3\left(a_3 - \frac{h_3}{2}\right) & -C_1S_3\left(a_3 - \frac{h_3}{2}\right) & C_3\left(a_3 - \frac{h_3}{2}\right) \end{bmatrix}^T$$

$$J_O^{l_3} = \begin{bmatrix} j_{O1}^{l_3} & j_{O2}^{l_3} & j_{O3}^{l_3} \end{bmatrix} = \begin{bmatrix} 0 & 0 & -C_1 \\ 0 & 0 & -S_1 \\ 1 & 0 & 0 \end{bmatrix}$$

$$j_{O1}^{l_3} = z_0 = \begin{bmatrix} 0 & 0 & 1 \end{bmatrix}^T$$

$$j_{O2}^{l_3} = \begin{bmatrix} 0 & 0 & 0 \end{bmatrix}^T$$

$$j_{O3}^{l_3} = z_2 = \begin{bmatrix} -C_1 & -S_1 & 0 \end{bmatrix}^T$$

So the inertial matrices of each joint are:

$$\begin{aligned}
B_1(q) &= m_{l_1}(J_P^{l_1})^T J_P^{l_1} + (J_O^{l_1})^T R_b^1 I_{l_1}^1 {R_b^1}^T J_O^{l_1} \\
&= m_{l_1} \begin{bmatrix} \frac{1}{2}((a_1 - h_1)^2 + r_1^2) & 0 & 0 \\ * & 0 & 0 \\ * & * & 0 \end{bmatrix} \\
B_2(q) &= m_{l_2}(J_P^{l_2})^T J_P^{l_2} + (J_O^{l_2})^T R_b^2 I_{l_2}^2 {R_b^2}^T J_O^{l_2} \\
&= m_{l_2} \begin{bmatrix} a_1^2 + \left(d_2 + q_2 - \frac{1}{2}a_2\right)^2 + \frac{1}{12}\left(a_2^2 + c_2^2\right) & -a_1 & 0 \\ * & 1 & 0 \\ * & * & 0 \end{bmatrix} \\
B_3(q) &= m_{l_3}(J_P^{l_3})^T J_P^{l_3} + (J_O^{l_3})^T R_b^3 I_{l_3}^3 {R_b^3}^T J_O^{l_3} \\
&= m_{l_3} \begin{bmatrix} a_1^2 + \left(d_2 + q_2 - \left(\frac{1}{2}h_3 - a_3\right) C_3\right)^2 + \frac{1}{12}(h_3^2 + r_3^2) & -a_1 & \frac{1}{2}a_1(2a_3 - h_3)S_3 \\ * & 1 & -\frac{1}{2}(2a_3 - h_3)S_3 \\ * & * & a_3^2 - a_3h_3 + h_3^2 + \frac{1}{2}r_3^2 \end{bmatrix}
\end{aligned}$$

So the overall inertia matrix is:

$$
\begin{aligned}
B(q) &= B_1(q) + B_2(q) + B_3(q) \\
&= \begin{bmatrix} K & -a_1(m_{l_2}+m_{l_3}) & \frac{1}{2}m_{l_3}a_1(2a_3-h_3)S_3 \\ * & m_{l_2}+m_{l_3} & -\frac{1}{2}m_{l_3}(2a_3-h_3)S_3 \\ * & * & a_3^2 - a_3h_3 + h_3^2 + \frac{1}{2}r_3^2 \end{bmatrix} \\
&= \begin{bmatrix} 0.4904q_2 + 0.05885C_3 + 0.0474C_3^2 + 0.1962q_2C_3 + 0.8173q_2^2 + 0.4796 & -0.6196 & 0.03923S_3 \\ * & 1.549 & -0.09808S_3 \\ * & * & 0.04757 \end{bmatrix}
\end{aligned}
$$

with :

$$
\begin{aligned}
K = \frac{1}{2}m_{l_1}\left((a_1-h_1)^2 + r_1^2\right) + m_{l_2}\left(a_1^2 + \left(d_2 + q_2 - \frac{1}{2}a_2\right)^2 + \frac{1}{12}\left(a_2^2 + c_2^2\right)\right) \\
+ m_{l_3}\left(a_1^2 + \left(d_2 + q_2 - \left(\frac{1}{2}h_3 - a_3\right)C_3\right)^2 + \frac{1}{12}(h_3^2 + r_3^2)\right)
\end{aligned}
$$

Finally, the kinetic energy is given by:

$$
\begin{aligned}
\mathcal{T}(q,\dot{q}) = \frac{1}{2}\dot{q}^T B(q)\dot{q} &= 0.0237\dot{q}_1^2C_3^2 - 0.6196\dot{q}_1\dot{q}_2 + 0.3549\dot{q}_1^2q_2 + 0.248\dot{q}_1^2 + 0.7745\dot{q}_2^2 + 0.02378\dot{q}_3^2 \\
&+ 0.7745\dot{q}_1^2q_2^2 + 0.02942\dot{q}_1^2C_3 + 0.03923\dot{q}_1\dot{q}_3S_3 - 0.09808\dot{q}_2\dot{q}_3S_3 + 0.09808\dot{q}_1^2q_2C_3
\end{aligned}
$$

The symbolic expression is not reported for space reasons.

2.2 Compute the potential energy

The potential energy is given by:

$$
\mathcal{U}(q) = -\sum_{i=1}^{n} m_{l_i} g_0^T p_{l_i}
$$

where $g_0 = \begin{bmatrix} 0 & 0 & -g \end{bmatrix}^T$ is the gravity acceleration vector in the base frame Σ_b.
So:

$$
\begin{aligned}
\mathcal{U}_1 &= -m_{l_1} g d_0 \\
\mathcal{U}_2 &= -m_{l_2} g d_0 \\
\mathcal{U}_3(q) &= -m_{l_3} g \left(d_0 + \left(a_3 - \frac{h_3}{2}\right)S_3\right)
\end{aligned}
$$

Finally:

$$
\mathcal{U}(q) = -(\mathcal{U}_1 + \mathcal{U}_2 + \mathcal{U}_3(q)) = \left[(m_{l_1} + m_{l_2} + m_{l_3})d_0 + m_{l_3}\left(a_3 - \frac{h_3}{2}\right)S_3\right]g = 0.9621S_3 + 4.033
$$

3 Assignment 3

3.1 Equations of motion

The equations of motion for an open chain robotic manipulator are:

$$B(q)\ddot{q} + C(q,\dot{q})\dot{q} + F_v\dot{q} + F_s sign(\dot{q}) + g(q) = \tau - J^T(q)h_e$$

Ignoring the contributions related to frictions and the external wrench (F_v, F_s, he), the equations reduce to:

$$B(q)\ddot{q} + C(q,\dot{q})\dot{q} + g(q) = \tau$$

where τ is the command torque, $C(q,\dot{q})$ is the Coriolis matrix and $g(q)$ is the gravity term, which is given by:

$$g_i(q) = -\sum_{j=1}^{n} m_{l_i} g_0^T j_{Pi}^{l_j}(q) \rightarrow g(q) = \begin{bmatrix} 0 \\ 0 \\ m_{l_3} g\left(a_3 - \frac{1}{2}h_3\right) C_3 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0.9621 C_3 \end{bmatrix}$$

The c_{ij} elements of $C(q,\dot{q})$ are:

$$c_{ij} = \sum_{k=1}^{n} \frac{1}{2}\left(\frac{\partial b_{ij}}{\partial q_k} + \frac{\partial b_{ik}}{\partial q_j} - \frac{\partial b_{jk}}{\partial q_i}\right)\dot{q}_k$$

where b_{ij}, b_{ik} and b_{jk} are the elements of the inertial matrix $B(q)$. The derivatives of the $B(q)$ matrix are:

$$\frac{\partial B}{\partial q_1} = \begin{bmatrix} 0 & 0 & 0 \\ * & 0 & 0 \\ * & * & 0 \end{bmatrix}$$
$$\frac{\partial B}{\partial q_2} = \begin{bmatrix} 3.098q_2 + 0.1962C_3 + 0.7099 & 0 & 0 \\ * & 0 & 0 \\ * & * & 0 \end{bmatrix}$$
$$\frac{\partial B}{\partial q_3} = \begin{bmatrix} -0.0948S_3C_3 - 0.05885S_3 - 0.1962q_2S_3 & 0 & 0.03923C_3 \\ * & 0 & -0.09808C_3 \\ * & * & 0 \end{bmatrix}$$

So the c_{ij} components are:

$$\begin{aligned}
c_{11} &= \frac{1}{2}\left(\frac{\partial b_{11}}{\partial q_1} + \frac{\partial b_{11}}{\partial q_1} - \frac{\partial b_{11}}{\partial q_1}\right)\dot{q}_1 + \frac{1}{2}\left(\frac{\partial b_{11}}{\partial q_2} + \frac{\partial b_{12}}{\partial q_1} - \frac{\partial b_{12}}{\partial q_1}\right)\dot{q}_2 + \frac{1}{2}\left(\frac{\partial b_{11}}{\partial q_3} + \frac{\partial b_{13}}{\partial q_1} - \frac{\partial b_{13}}{\partial q_1}\right)\dot{q}_3 \\
&= \frac{1}{2}m_{l_2}(2d_2 + 2q_2 - a_2)\dot{q}_2 + m_{l_3}S_3C_3(a_3h_3 - a_3^2 - h_3^2 - r_3^2)\dot{q}_3 \\
c_{12} &= \frac{1}{2}\left(\frac{\partial b_{12}}{\partial q_1} + \frac{\partial b_{11}}{\partial q_2} - \frac{\partial b_{21}}{\partial q_1}\right)\dot{q}_1 + \frac{1}{2}\left(\frac{\partial b_{12}}{\partial q_2} + \frac{\partial b_{12}}{\partial q_2} - \frac{\partial b_{22}}{\partial q_1}\right)\dot{q}_2 + \frac{1}{2}\left(\frac{\partial b_{12}}{\partial q_3} + \frac{\partial b_{13}}{\partial q_2} - \frac{\partial b_{23}}{\partial q_1}\right)\dot{q}_3 \\
&= 0.5\dot{q}_1\dot{q}_2(3.098q_2 + 0.1962C_3 + 0.7099) \\
c_{13} &= \frac{1}{2}\left(\frac{\partial b_{13}}{\partial q_1} + \frac{\partial b_{11}}{\partial q_3} - \frac{\partial b_{31}}{\partial q_1}\right)\dot{q}_1 + \frac{1}{2}\left(\frac{\partial b_{13}}{\partial q_2} + \frac{\partial b_{12}}{\partial q_3} - \frac{\partial b_{32}}{\partial q_1}\right)\dot{q}_2 + \frac{1}{2}\left(\frac{\partial b_{13}}{\partial q_3} + \frac{\partial b_{13}}{\partial q_3} - \frac{\partial b_{33}}{\partial q_1}\right)\dot{q}_3 \\
&= 0.03923C_3\dot{q}_3^2 - 0.5\dot{q}_1(0.0948S_3C_3 + 0.05885S_3 + 0.1962q_2S_3)\dot{q}_3 \\
c_{22} &= \frac{1}{2}\left(\frac{\partial b_{22}}{\partial q_1} + \frac{\partial b_{21}}{\partial q_2} - \frac{\partial b_{21}}{\partial q_2}\right)\dot{q}_1 + \frac{1}{2}\left(\frac{\partial b_{22}}{\partial q_2} + \frac{\partial b_{22}}{\partial q_2} - \frac{\partial b_{22}}{\partial q_2}\right)\dot{q}_2 + \frac{1}{2}\left(\frac{\partial b_{22}}{\partial q_3} + \frac{\partial b_{23}}{\partial q_2} - \frac{\partial b_{23}}{\partial q_2}\right)\dot{q}_3 \\
&= 0 \\
c_{23} &= \frac{1}{2}\left(\frac{\partial b_{23}}{\partial q_1} + \frac{\partial b_{21}}{\partial q_3} - \frac{\partial b_{31}}{\partial q_2}\right)\dot{q}_1 + \frac{1}{2}\left(\frac{\partial b_{23}}{\partial q_2} + \frac{\partial b_{22}}{\partial q_3} - \frac{\partial b_{32}}{\partial q_2}\right)\dot{q}_2 + \frac{1}{2}\left(\frac{\partial b_{23}}{\partial q_3} + \frac{\partial b_{23}}{\partial q_3} - \frac{\partial b_{33}}{\partial q_2}\right)\dot{q}_3 \\
&= 0 \\
c_{33} &= \frac{1}{2}\left(\frac{\partial b_{33}}{\partial q_1} + \frac{\partial b_{31}}{\partial q_3} - \frac{\partial b_{31}}{\partial q_3}\right)\dot{q}_1 + \frac{1}{2}\left(\frac{\partial b_{33}}{\partial q_2} + \frac{\partial b_{32}}{\partial q_3} - \frac{\partial b_{32}}{\partial q_3}\right)\dot{q}_2 + \frac{1}{2}\left(\frac{\partial b_{33}}{\partial q_3} + \frac{\partial b_{33}}{\partial q_3} - \frac{\partial b_{33}}{\partial q_3}\right)\dot{q}_3 \\
&= 0
\end{aligned}$$

So the equations of motion are:

$$B(q)\ddot{q} + C(q,\dot{q})\dot{q} + g(q) = \tau$$

$$\begin{bmatrix}\tau_1\\ \tau_2\\ \tau_3\end{bmatrix} = \begin{bmatrix} 0.496\ddot{q}_1 - 0.6196\ddot{q}_2 + 0.7099\ddot{q}_1 q_2 + 0.7099\dot{q}_1\dot{q}_2^2 + 1.549\ddot{q}_1 q_2^2 + 0.05885\ddot{q}_1 C_3 + 0.03923d\dot{q}_3 S_3 + 0.0474\ddot{q}_1 C_3^2 + 0.03923\dot{q}_3^3 C_3 + 0.1962\ddot{q}_1 q_2 C_3 - 0.0474\dot{q}_1\dot{q}_3^2 sin(2.0q_3) + 0.1962\dot{q}_1\dot{q}_2^2 C_3 - 0.05885\dot{q}_1\dot{q}_3^2 S_3 + 3.098\dot{q}_1\dot{q}_2^2 q_2 - 0.1962\dot{q}_1\dot{q}_3^2 q_2 S_3 \\ 0.5\dot{q}_2(3.098q_2 + 0.1962C_3 + 0.7099)\dot{q}_1^2 - 0.6196\ddot{q}_1 + 1.549\ddot{q}_2 - 0.09808d\dot{q}_3 S_3 \\ 0.04757d\dot{q}_3 + 0.9621C_3 + \dot{q}_1(0.03923C_3\dot{q}_3^2 - 0.5\dot{q}_1(0.0948S_3C_3 + 0.05885S_3 + 0.1962q_2S_3)\dot{q}_3) + 0.03923\ddot{q}_1 S_3 - 0.09808\ddot{q}_2 S_3 \end{bmatrix}$$

where $q = \begin{bmatrix} q_1 & q_2 & q_3 \end{bmatrix}^T, \dot{q} = \begin{bmatrix} \dot{q}_1 & \dot{q}_2 & \dot{q}_3 \end{bmatrix}^T, \ddot{q} = \begin{bmatrix} \ddot{q}_1 & \ddot{q}_2 & \ddot{q}_3 \end{bmatrix}^T$ and:

$$\begin{aligned} B(q) &= B_1(q) + B_2(q) + B_3(q) \\ &= \begin{bmatrix} K & -a_1(m_{l_2} + m_{l_3}) & \frac{1}{2}m_{l_3}a_1(2a_3 - h_3)S_3 \\ * & m_{l_2} + m_{l_3} & -\frac{1}{2}m_{l_3}(2a_3 - h_3)S_3 \\ * & * & a_3^2 - a_3h_3 + h_3^2 + \frac{1}{2}r_3^2 \end{bmatrix} \\ K &= \frac{1}{2}m_{l_1}\left((a_1 - h_1)^2 + r_1^2\right) + m_{l_2}\left(a_1^2 + \left(d_2 + q_2 - \frac{1}{2}a_2\right)^2 + \frac{1}{12}\left(a_2^2 + c_2^2\right)\right) \\ &+ m_{l_3}\left(a_1^2 + \left(d_2 + q_2 - \left(\frac{1}{2}h_3 - a_3\right)C_3\right)^2 + \frac{1}{12}(h_3^2 + r_3^2)\right) \end{aligned}$$

$$C(q,\dot{q})\dot{q} = \begin{bmatrix} 0.5\dot{q}_2^2(3.098q_2 + 0.1962C_3 + 0.7099) - 0.5\dot{q}_3^2(0.0958S_3C_3 + 0.05885S_3 + 0.1962q_2S_3) & 0.5\dot{q}_1\dot{q}_2(3.098q_2 + 0.1962C_3 + 0.7099) & 0.03923C_3\dot{q}_3^2 - 0.5\dot{q}_1(0.0948S_3C_3 + 0.05885S_3 + 0.1962q_2S_3)\dot{q}_3 \\ * & 0 & 0 \\ * & * & 0 \end{bmatrix}$$

$$g(q) = \begin{bmatrix} 0 \\ 0 \\ m_{l_3}g\left(a_3 - \frac{1}{2}h_3\right)C_3 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0.9621C_3 \end{bmatrix}$$

4 Assignment 4

4.1 Compute the dynamic model using the recursive Newton-Euler formulation

5 Assignment 5

5.1 Compute the dynamic model in the operational space

The dynamic model in the operational space is described as follows:

$$B_A(x)\ddot{x} + C_A(x,\dot{x})\dot{x} + g_A(x) = u - u_e$$

where:

$$\begin{aligned}
B_A(x) &= J_A^{-T} B J_A^{-1} \\
C_A\dot{x} &= (J_A^{-T} C - B_A \dot{J}_A)\dot{q} \\
g_A(x) &= J_A^{-T} g \\
u &= T_A^T h \\
u_e &= T_A^T h_e
\end{aligned}$$

with:

$$T_A = \begin{bmatrix} 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & C_1 & 0 \\ 0 & 0 & 0 & 0 & S_1 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \end{bmatrix}$$

$$\dot{J}_A = \begin{bmatrix} C_1\ddot{q}_2 - S_1\dot{q}_1(d_2 + q2) - a_1C_1\dot{q}_1 - a_3C_3S_1\dot{q}_1 - a_3C_1S_3\ddot{q}_3 & C_1\dot{q}_1 & -a_3C_1S_3\dot{q}_1 - a_3C_3S_1\ddot{q}_3 \\ S_1\ddot{q}_2 + C_1\dot{q}_1(d_2 + q2) - a_1S_1\dot{q}_1 + a_3C_1C_3\dot{q}_1 - a_3S_1S_3\ddot{q}_3 & S_1\dot{q}_1 & a_3C_1C_3\ddot{q}_3 - a_3S_1S_3\dot{q}_1 \\ 0 & 0 & -a_3S_3\ddot{q}_3 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix}$$

The resulting matrices are not reported for space reasons.

6 Assignment 6

6.1 Design the joint space PD control law with gravity compensation

The goal is to implement the following architecture:

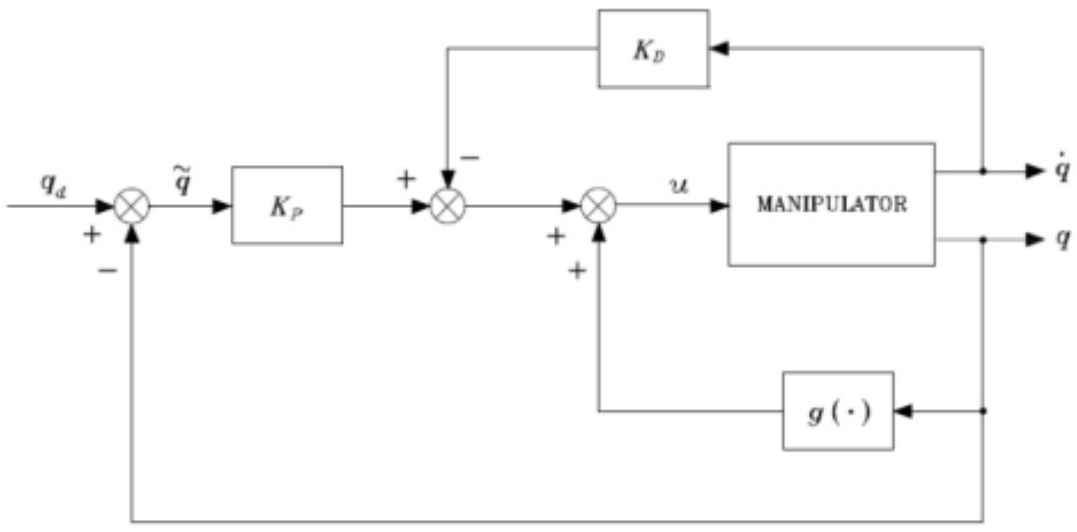

Figure 3: Joint space PD control law with gravity compensation architecture

The architecture follows the control law:

$$\tau = g(q) + K_P(q_d - q) - K_D\dot{q} \qquad \text{with } K_P = 50, K_D = 10$$

The architecture was implemented in SIMULINK as follows:

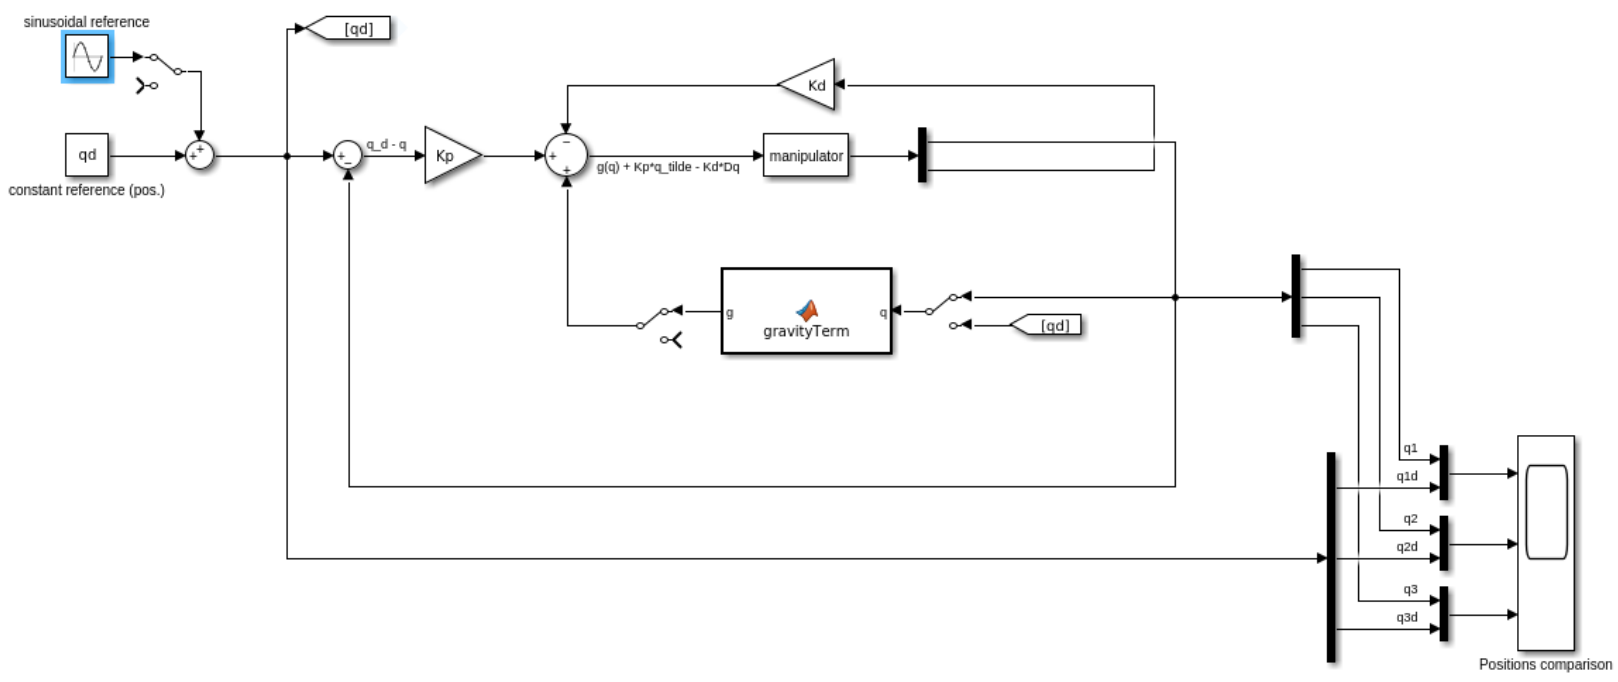

Figure 4: Joint space PD control law with gravity compensation SIMULINK model

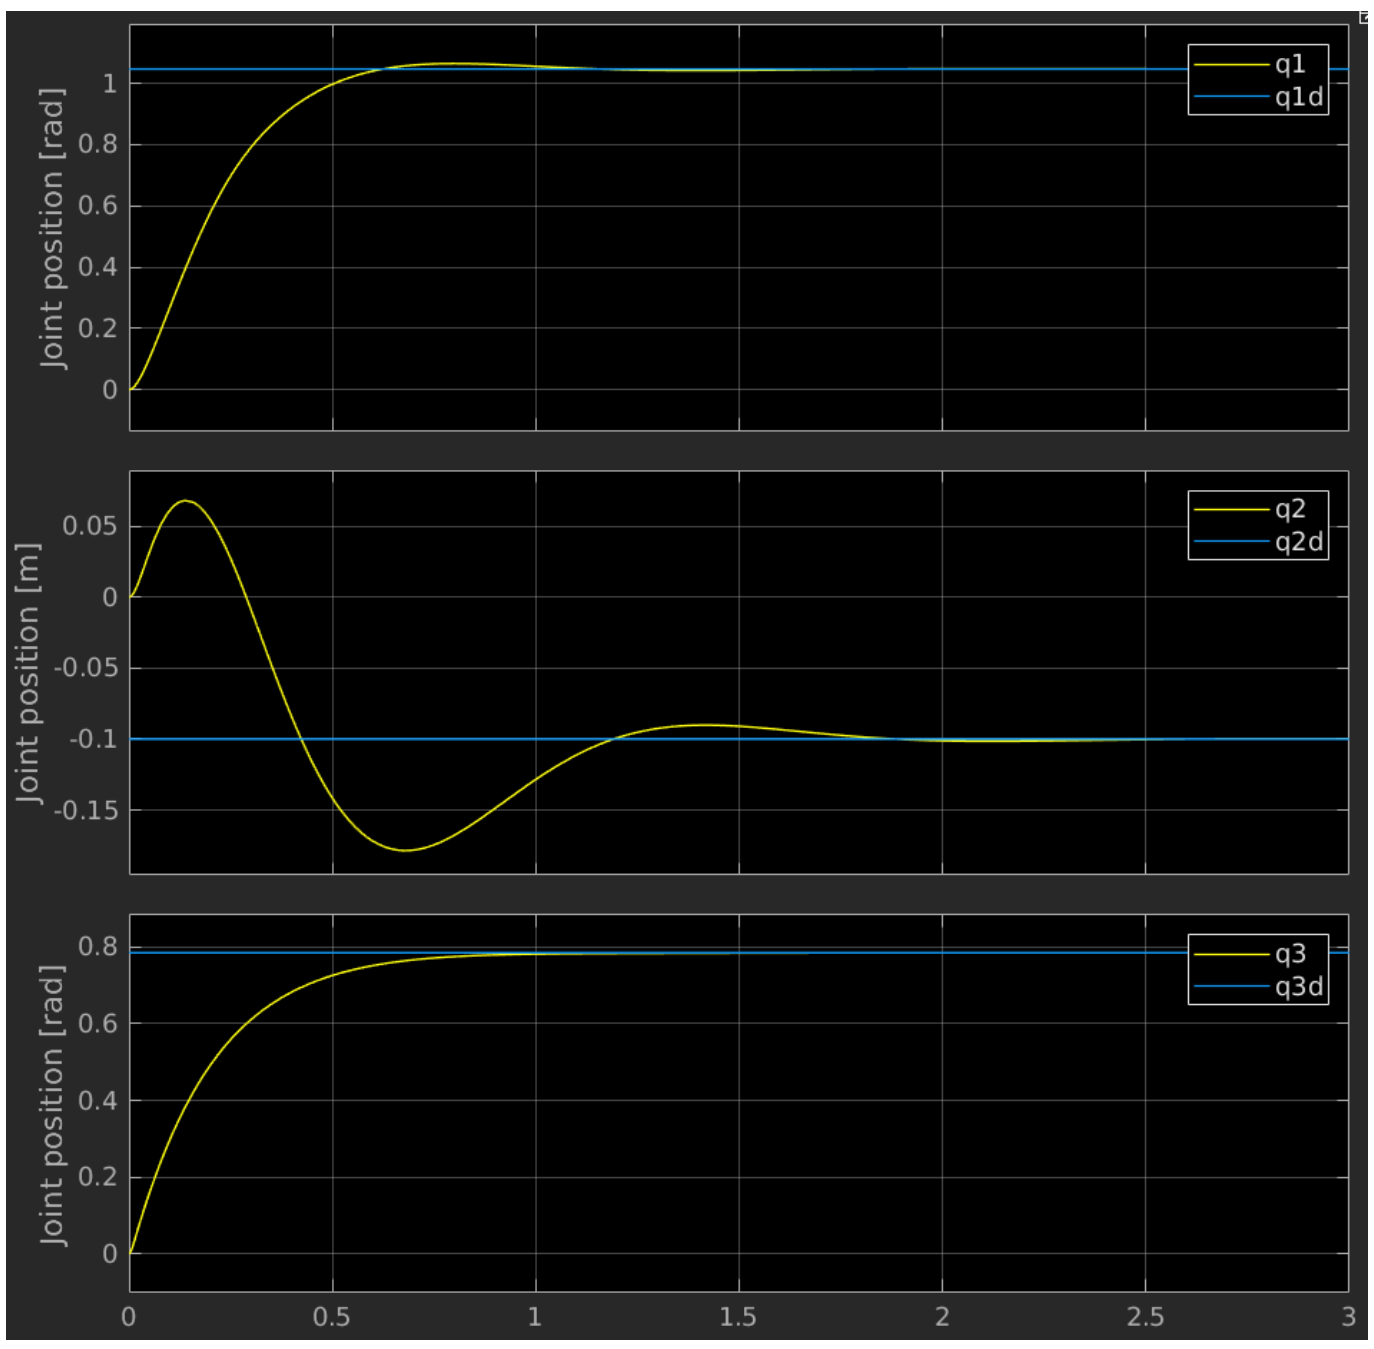

Figure 5: Joint positions - constant reference $q_d = \begin{bmatrix}\pi/3 & -0.1 & \pi/4\end{bmatrix}^T$

6.2 What happens if g(q) is not taken into account?

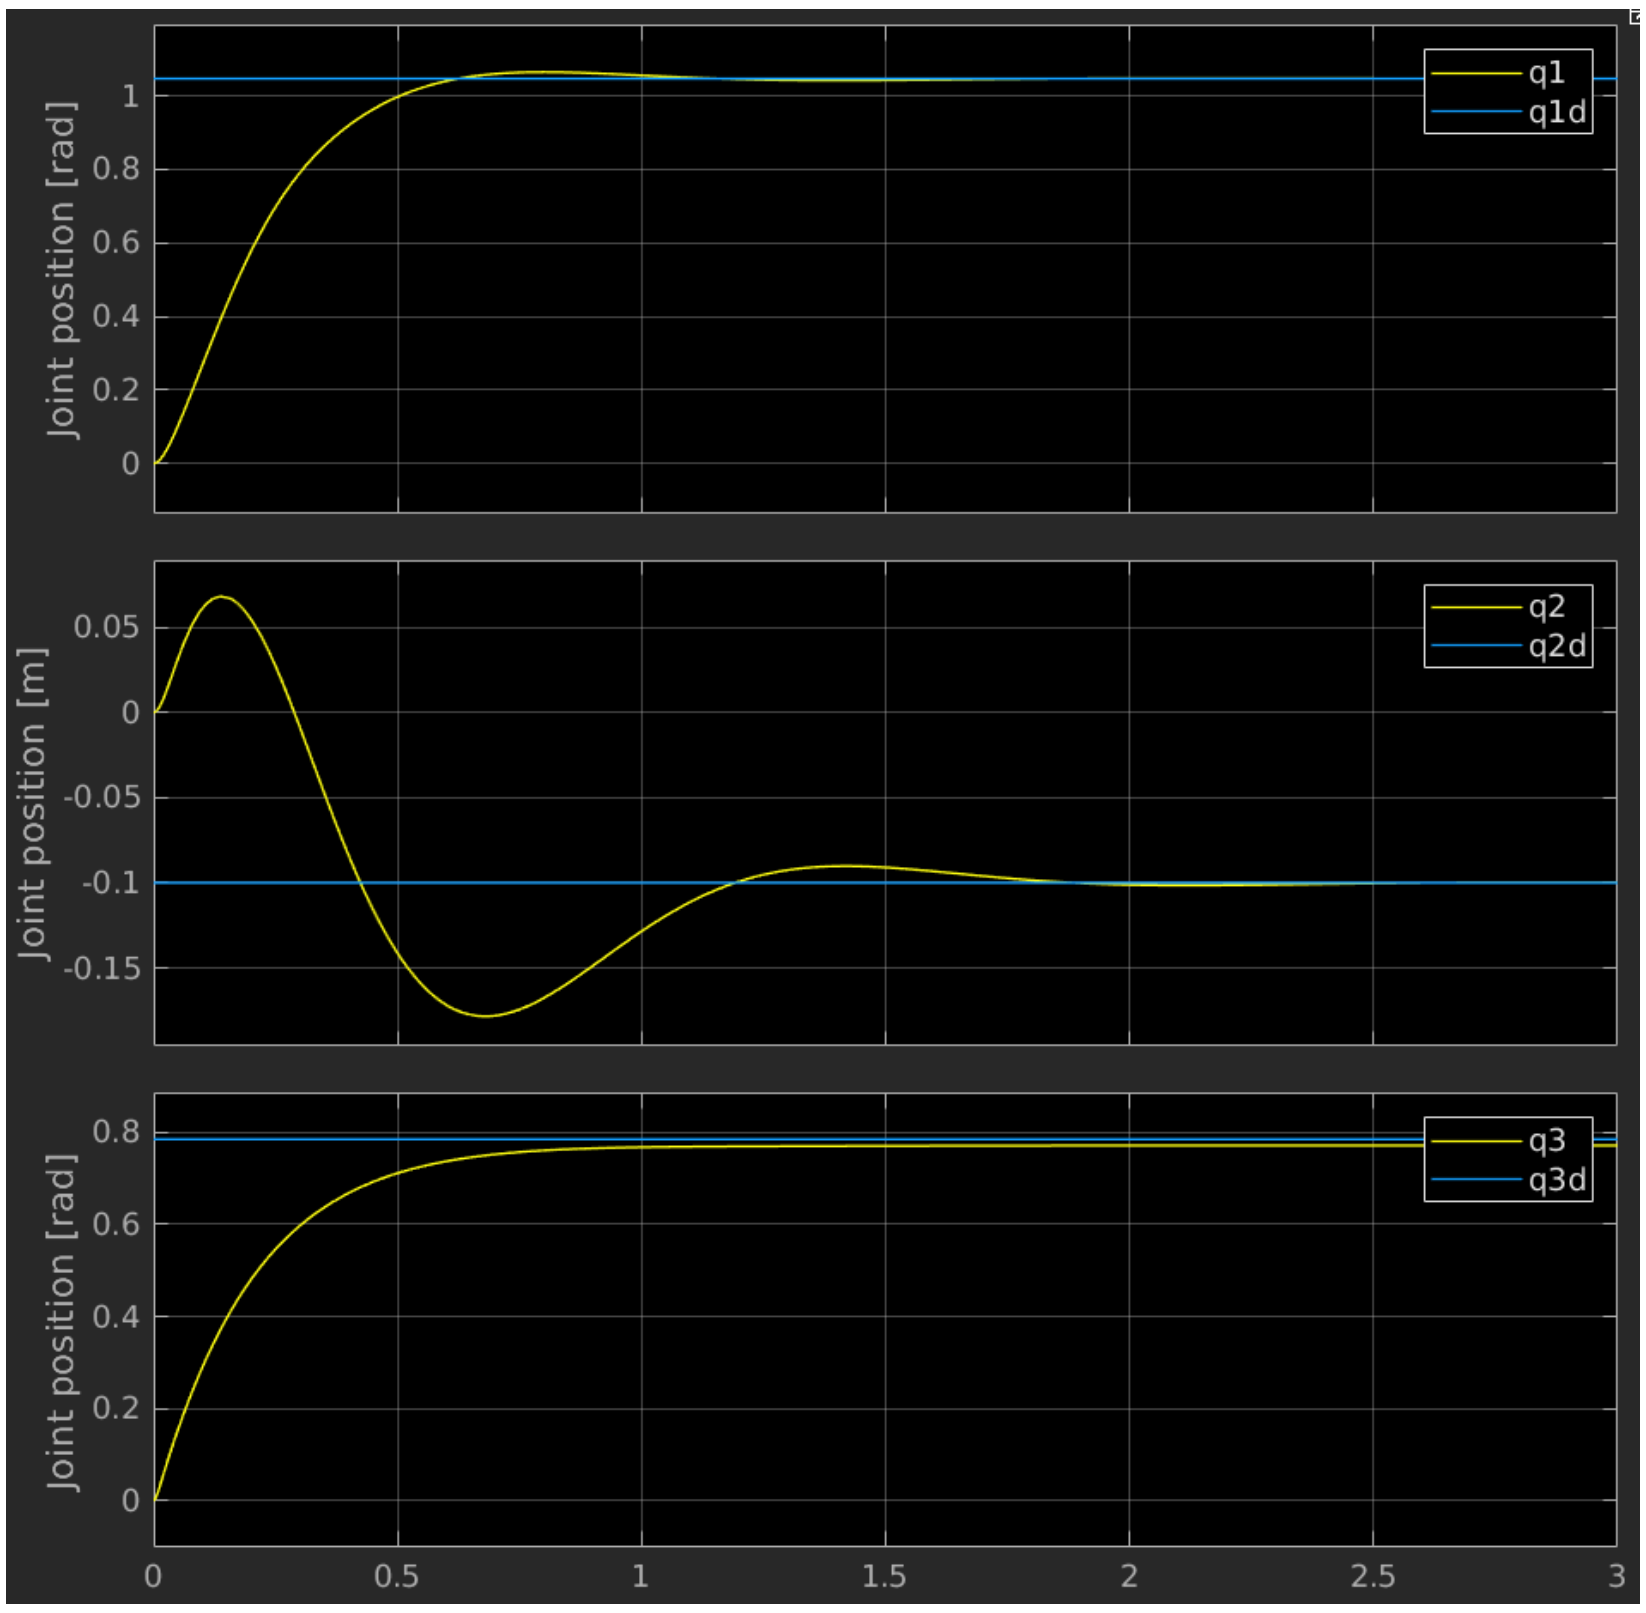

Figure 6: Joint positions - $g(q) = 0$

6.3 What happens if the gravity term is equal to g(q_d)?

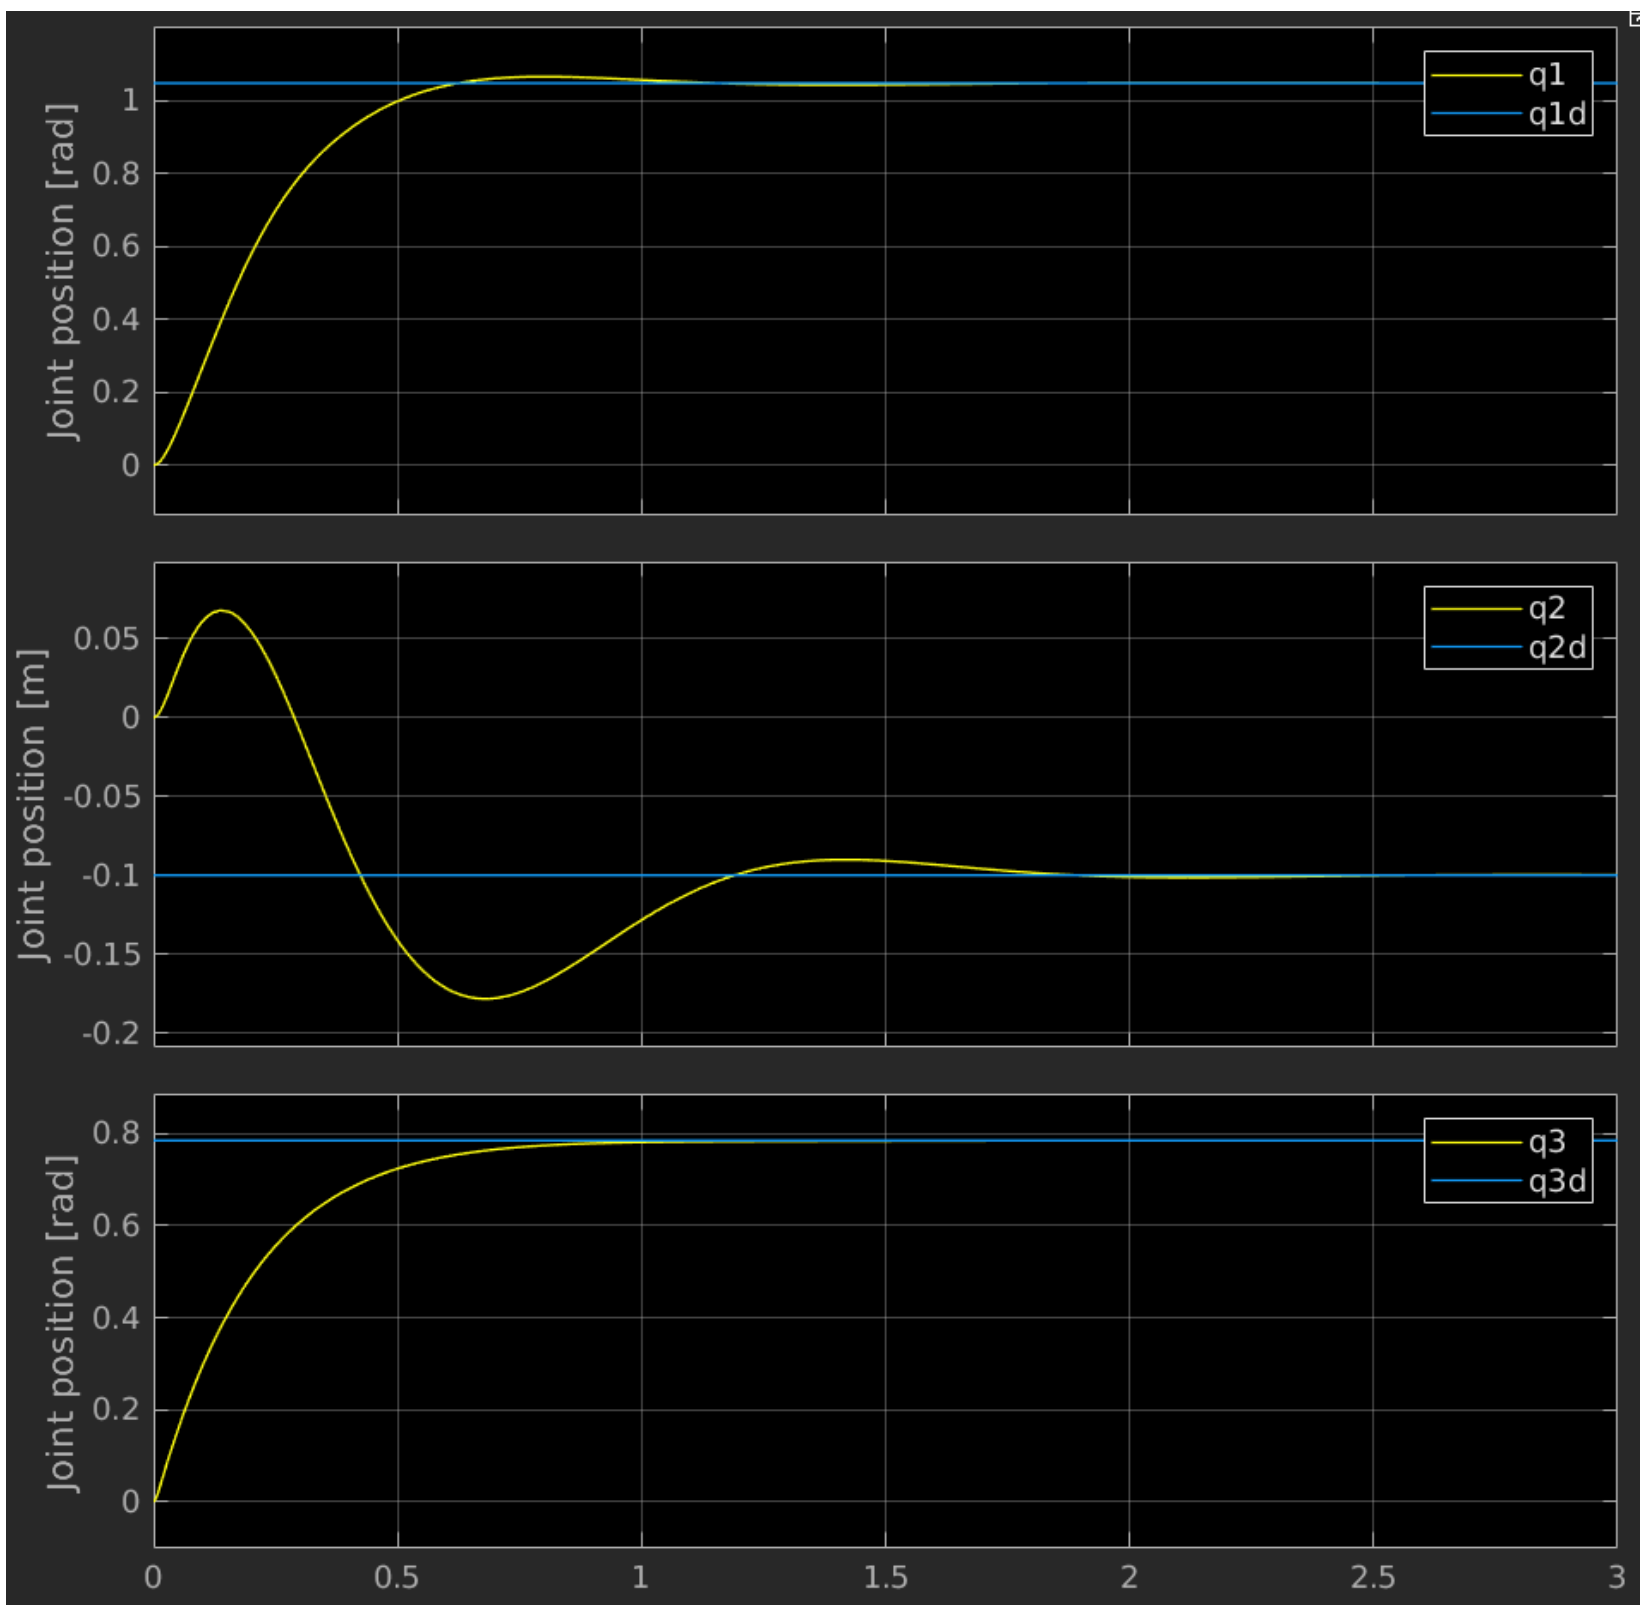

Figure 7: Joint positions - $g(q) = g(q_d)$

6.4 What happens if q_d is not constant?

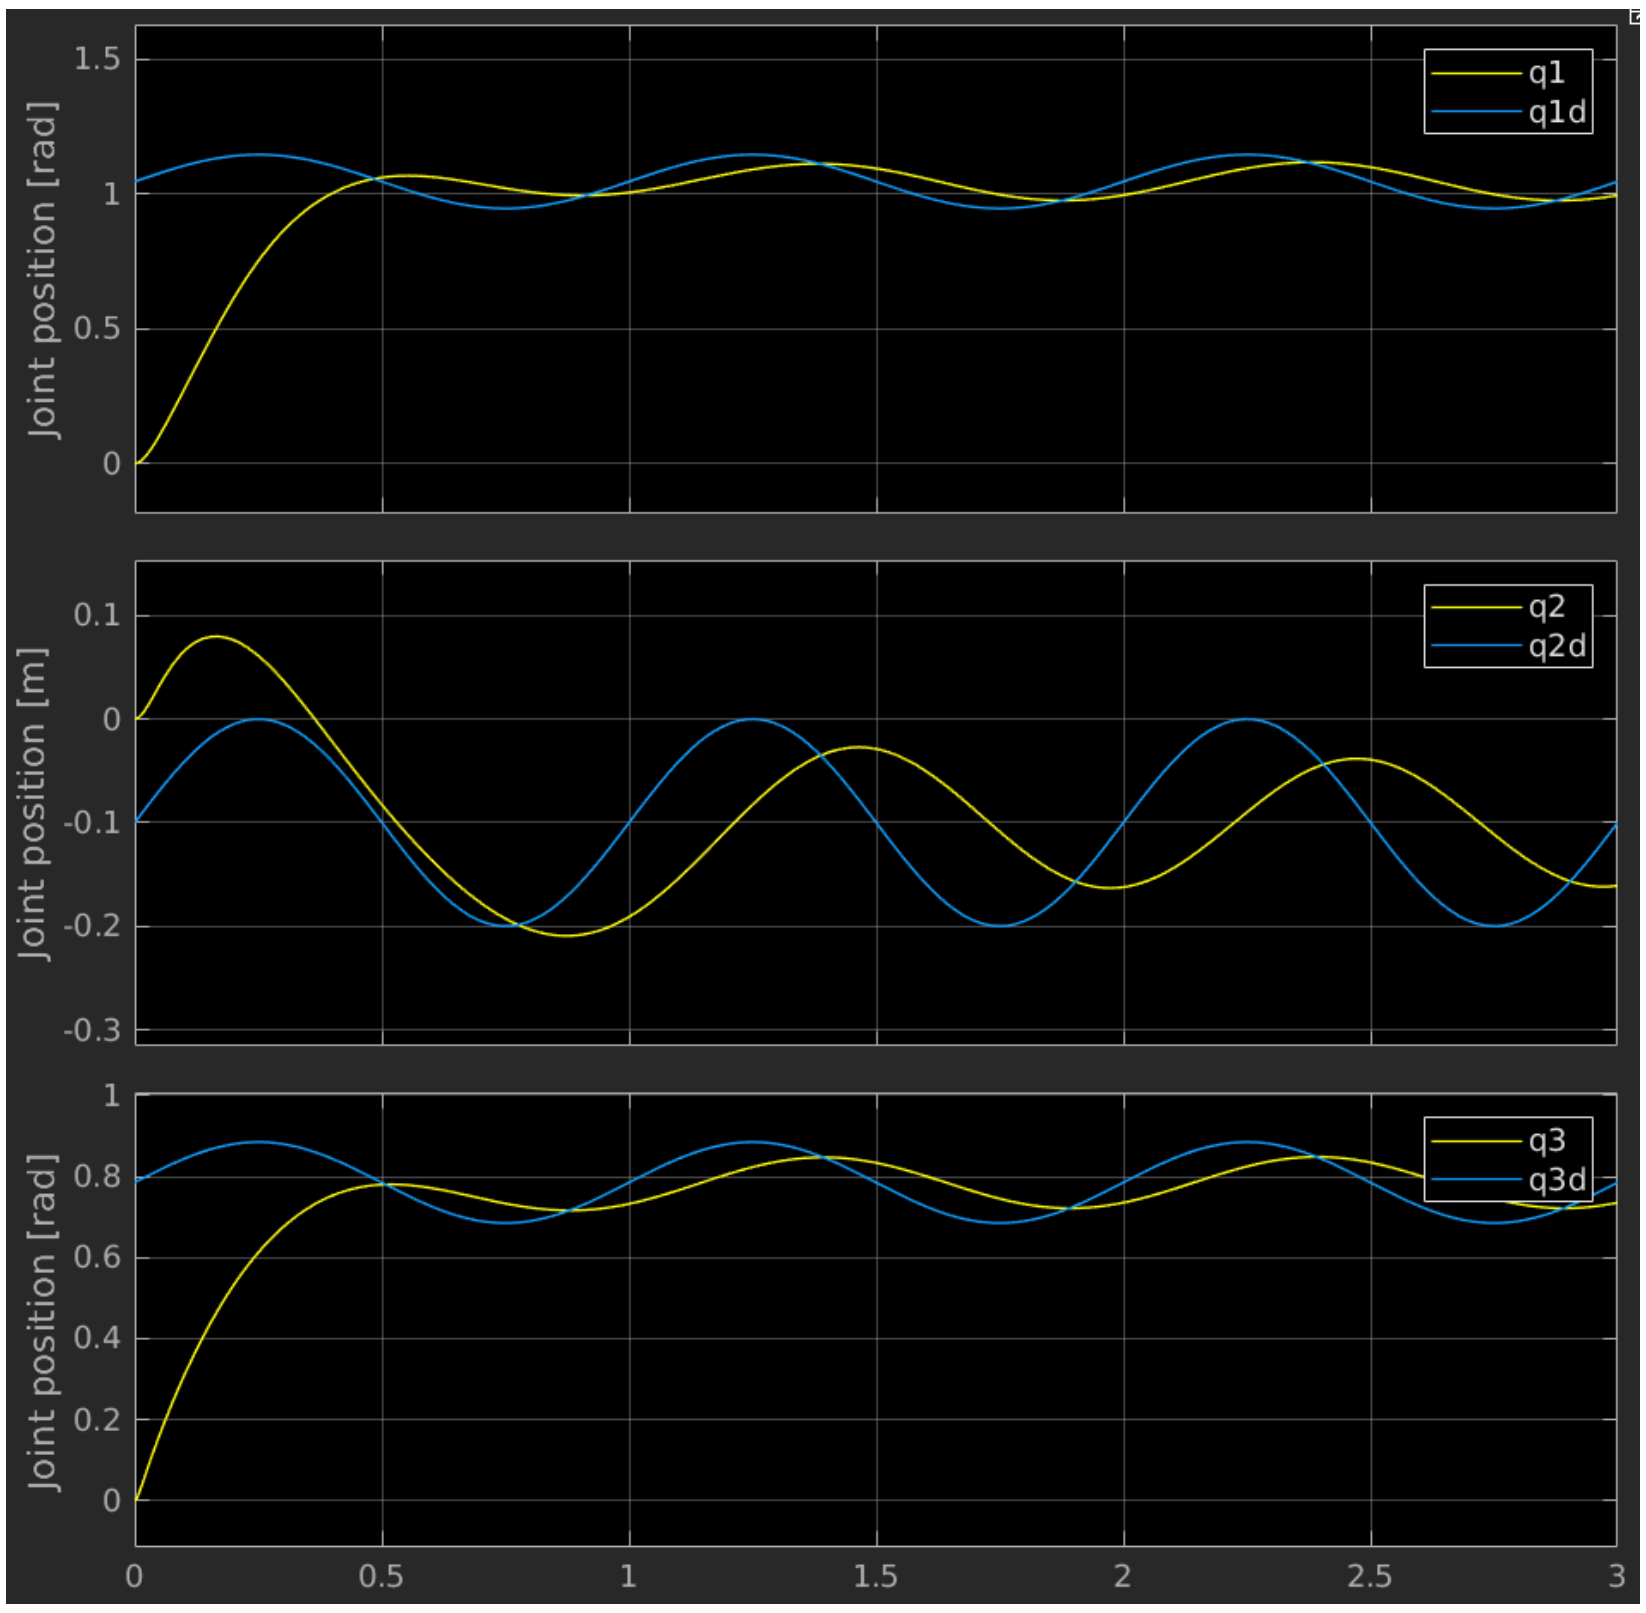

Figure 8: Joint positions - sinusoidal reference $q_d = \begin{bmatrix}\pi/3 & -0.1 & \pi/4\end{bmatrix}^T + 0.1sin(2\pi)$

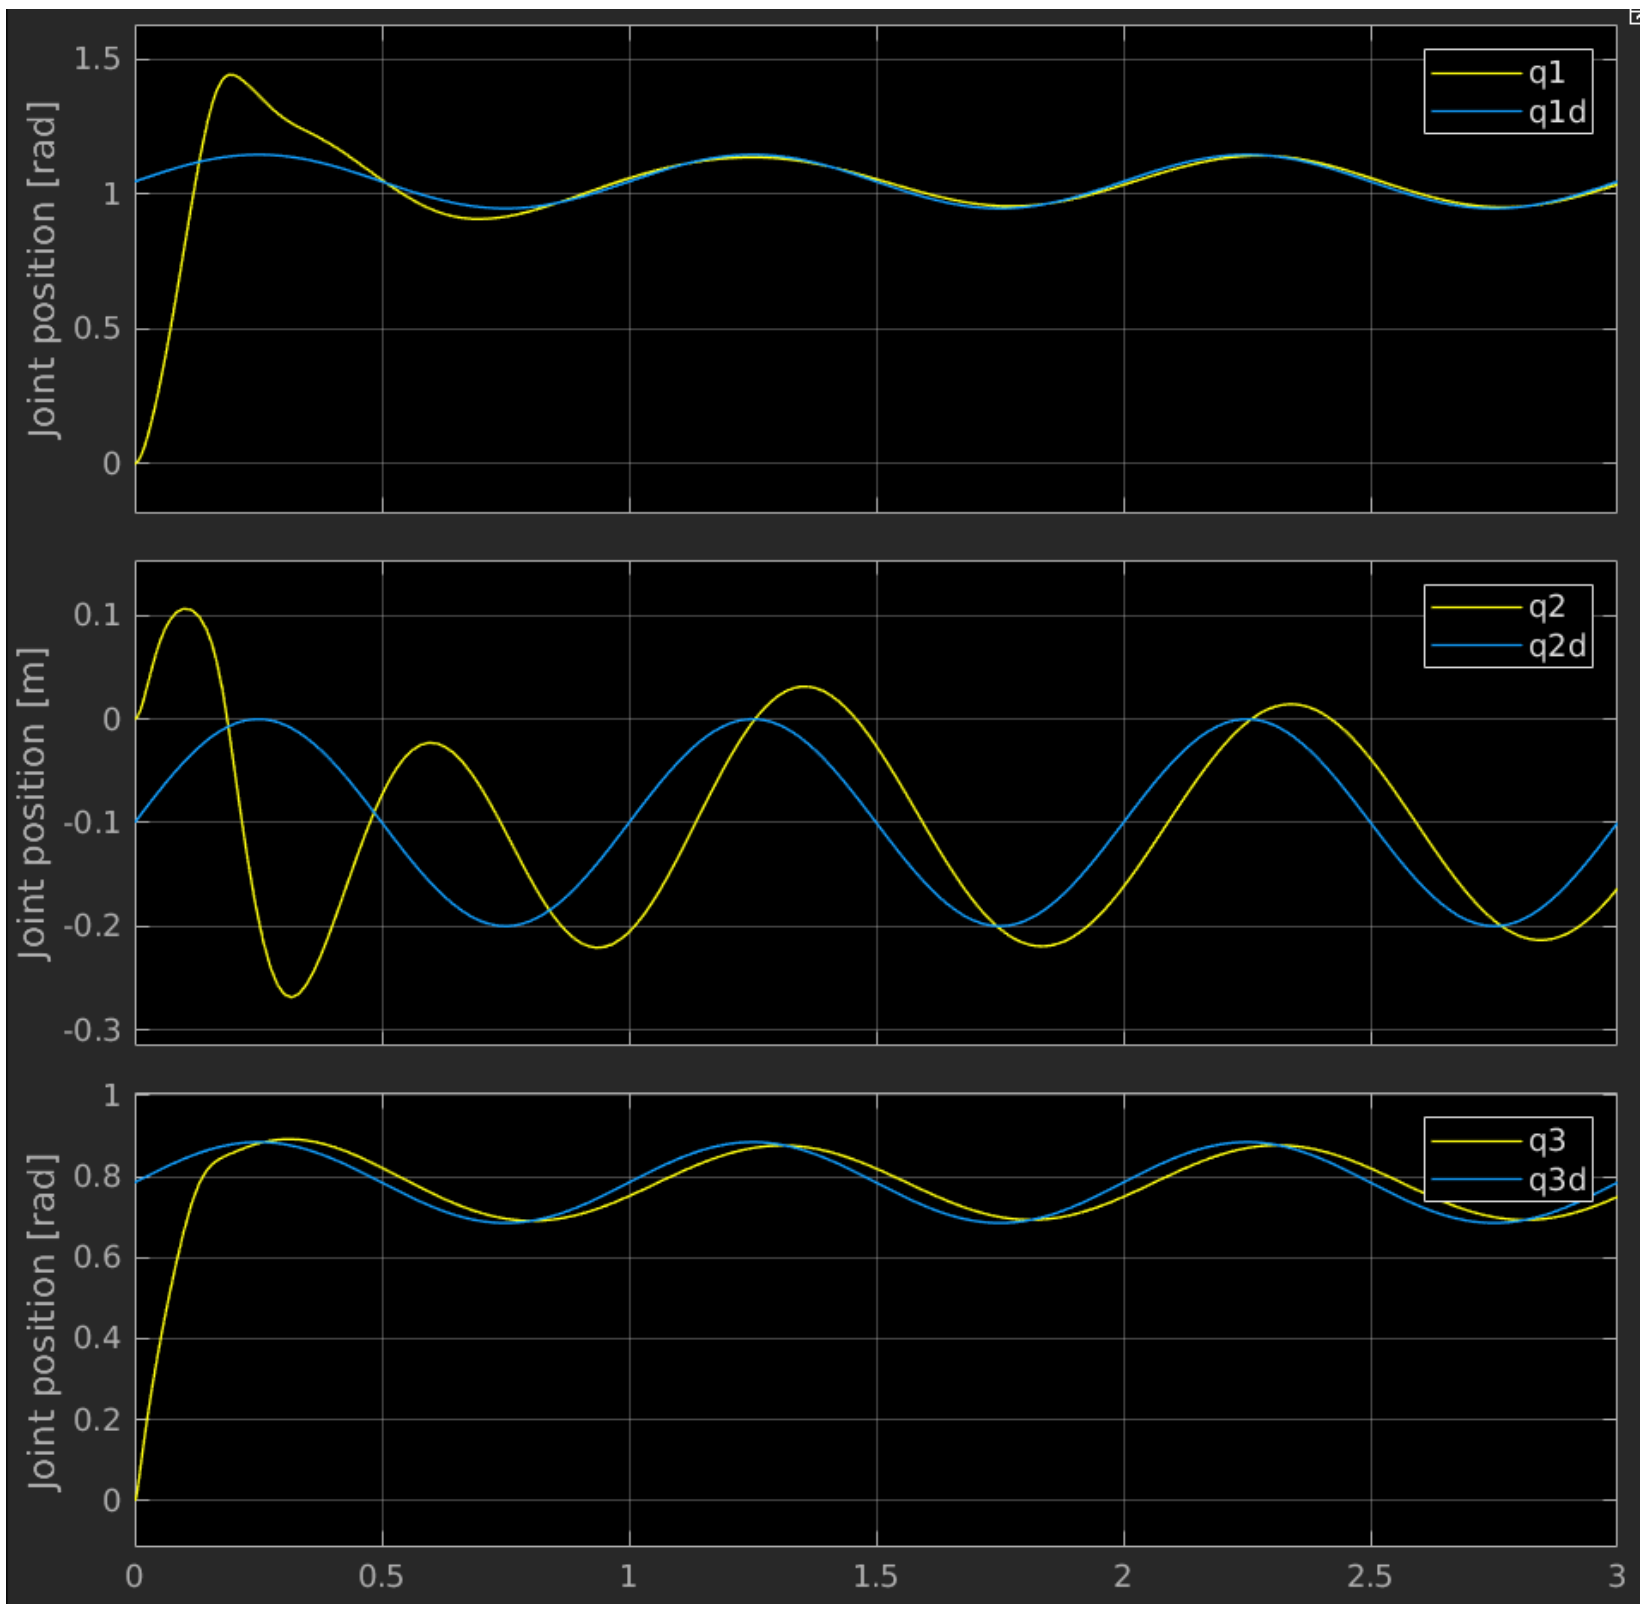

Figure 9: Joint positions - sinusoidal reference with $K_P = 150, K_D = 10$

7 Assignment 7

7.1 Design the joint space inverse dynamics control law

The goal is to implement the following architecture:

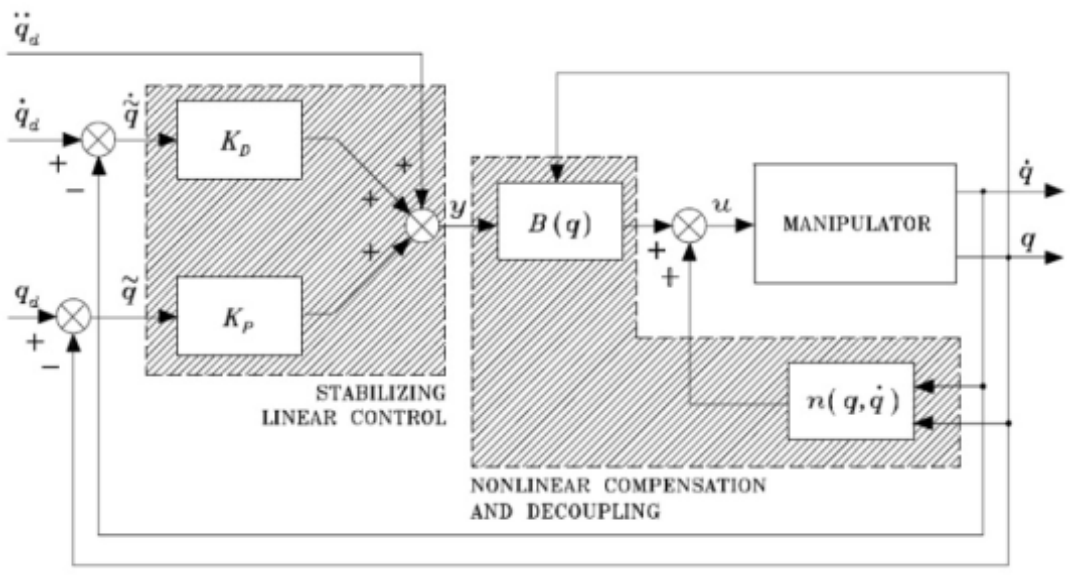

Figure 10: Joint space PD control law with gravity compensation architecture

The architecture works by linearizing non-linear dynamics and by decoupling each joint variable. It does so by implementing an inner feedback loop:

$$\tau = B(q)y + n(q, \dot{q})$$

where $n(q, \dot{q}) = C(q, \dot{q})\dot{q} + g(q)$ and y is controlled by the outer feedback loop:

$$y = \ddot{q}_d + K_D(\dot{q}_d - q) + K_P(q_d - q) \quad \text{with } K_P = 50, K_D = 15$$

The architecture was implemented in SIMULINK as follows:

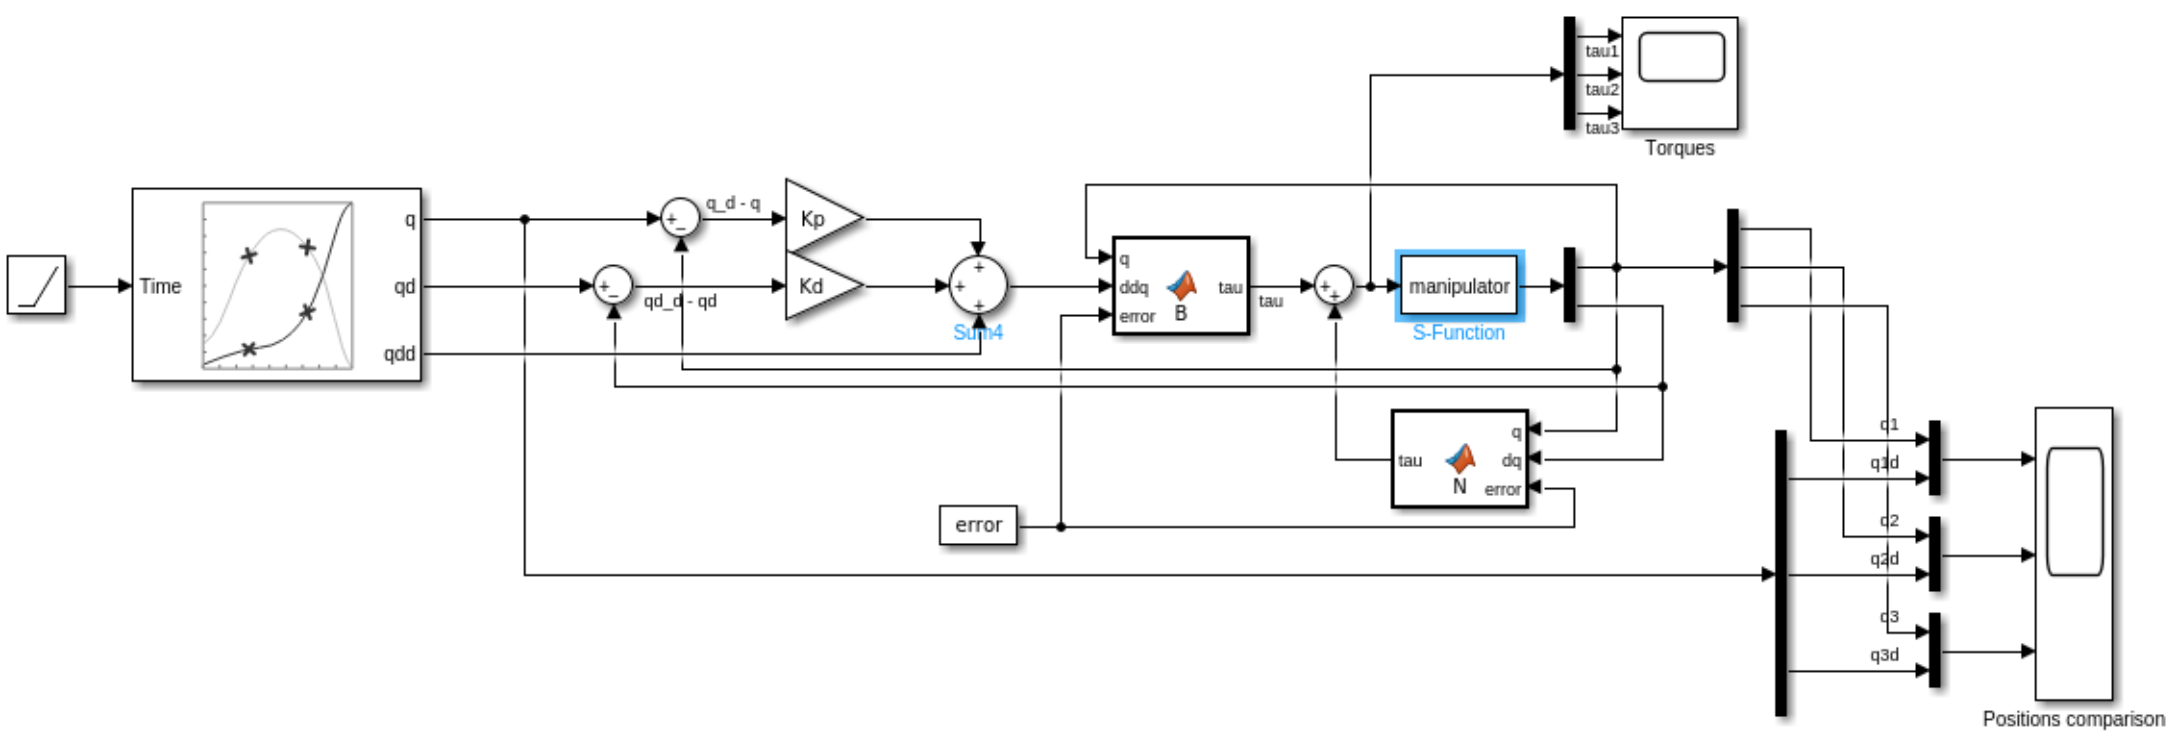

Figure 11: Joint space inverse control law SIMULINK model

The architecture is tested with a quintic polynomial trajectory that passes through the waypoints:

$$\begin{aligned}
q_d\,|_{t=0.5} &= \begin{bmatrix}\pi/3 & -0.2 & \pi/3\end{bmatrix} \\
q_d\,|_{t=1} &= \begin{bmatrix}-\pi/3 & -0.1 & \pi/4\end{bmatrix} \\
q_d\,|_{t=1.5} &= \begin{bmatrix}0 & -0.2 & 0\end{bmatrix} \\
q_d\,|_{t=2} &= \begin{bmatrix}\pi/2 & 0 & -\pi/4\end{bmatrix} \\
q_d\,|_{t=2.5} &= \begin{bmatrix}\pi/3 & -0.1 & \pi/4\end{bmatrix} \\
q_d\,|_{t=3} &= \begin{bmatrix}0 & 0 & 0\end{bmatrix}
\end{aligned}$$

The boundary conditions for the generation of the quintic trajectory are that the velocity and acceleration are null in each of the waypoints.

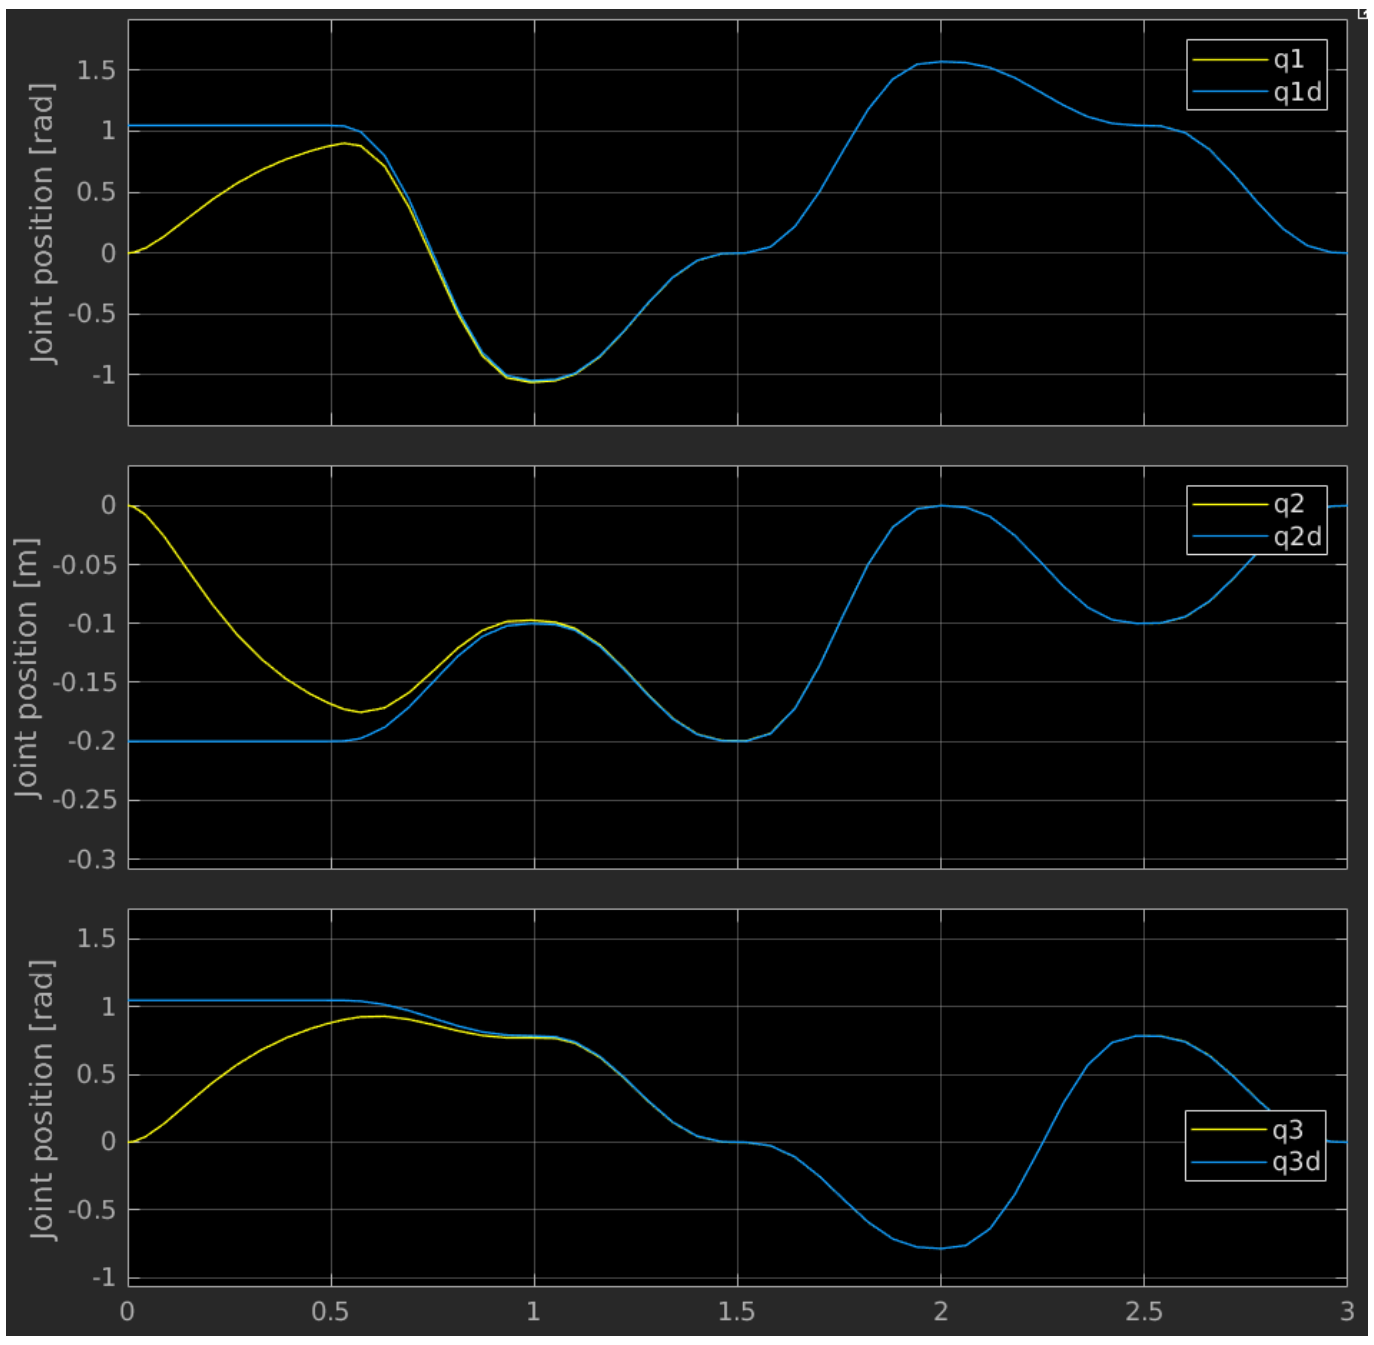

Figure 12: Joint positions

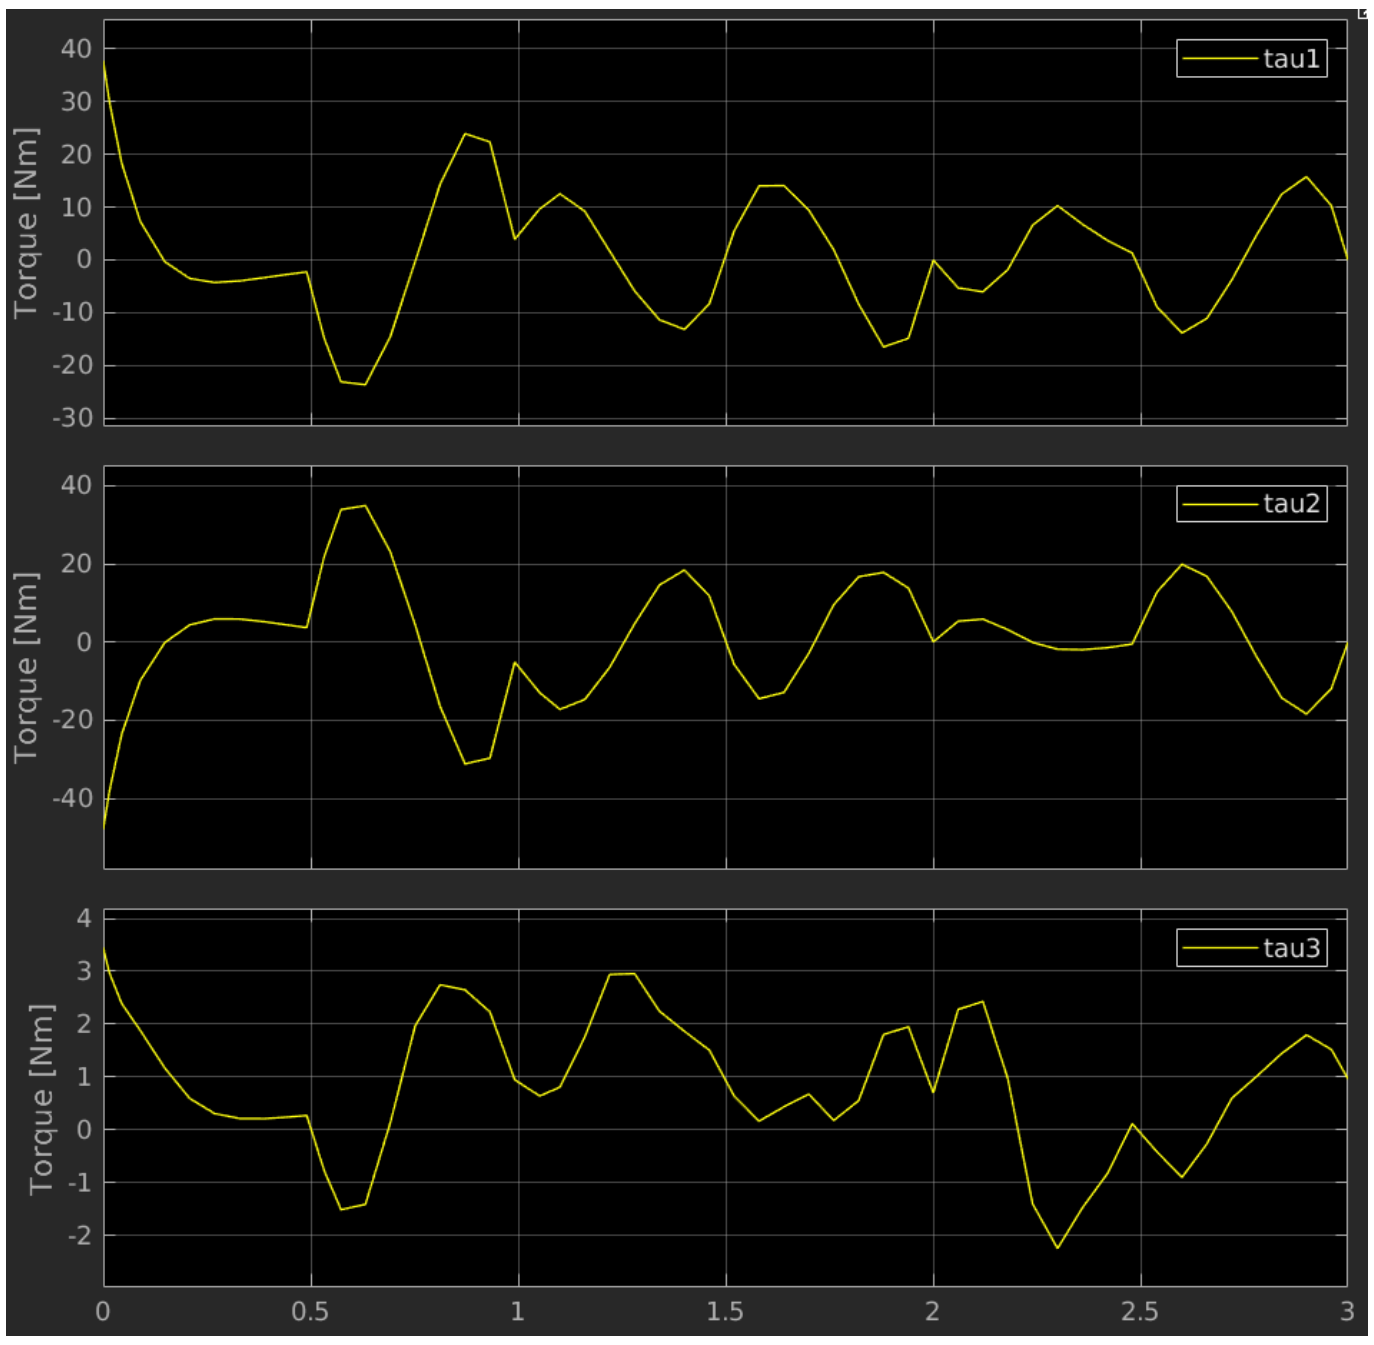

Figure 13: Joint torques

7.2 Check the behaviour of the control law when the B, C and g values are different than the true ones

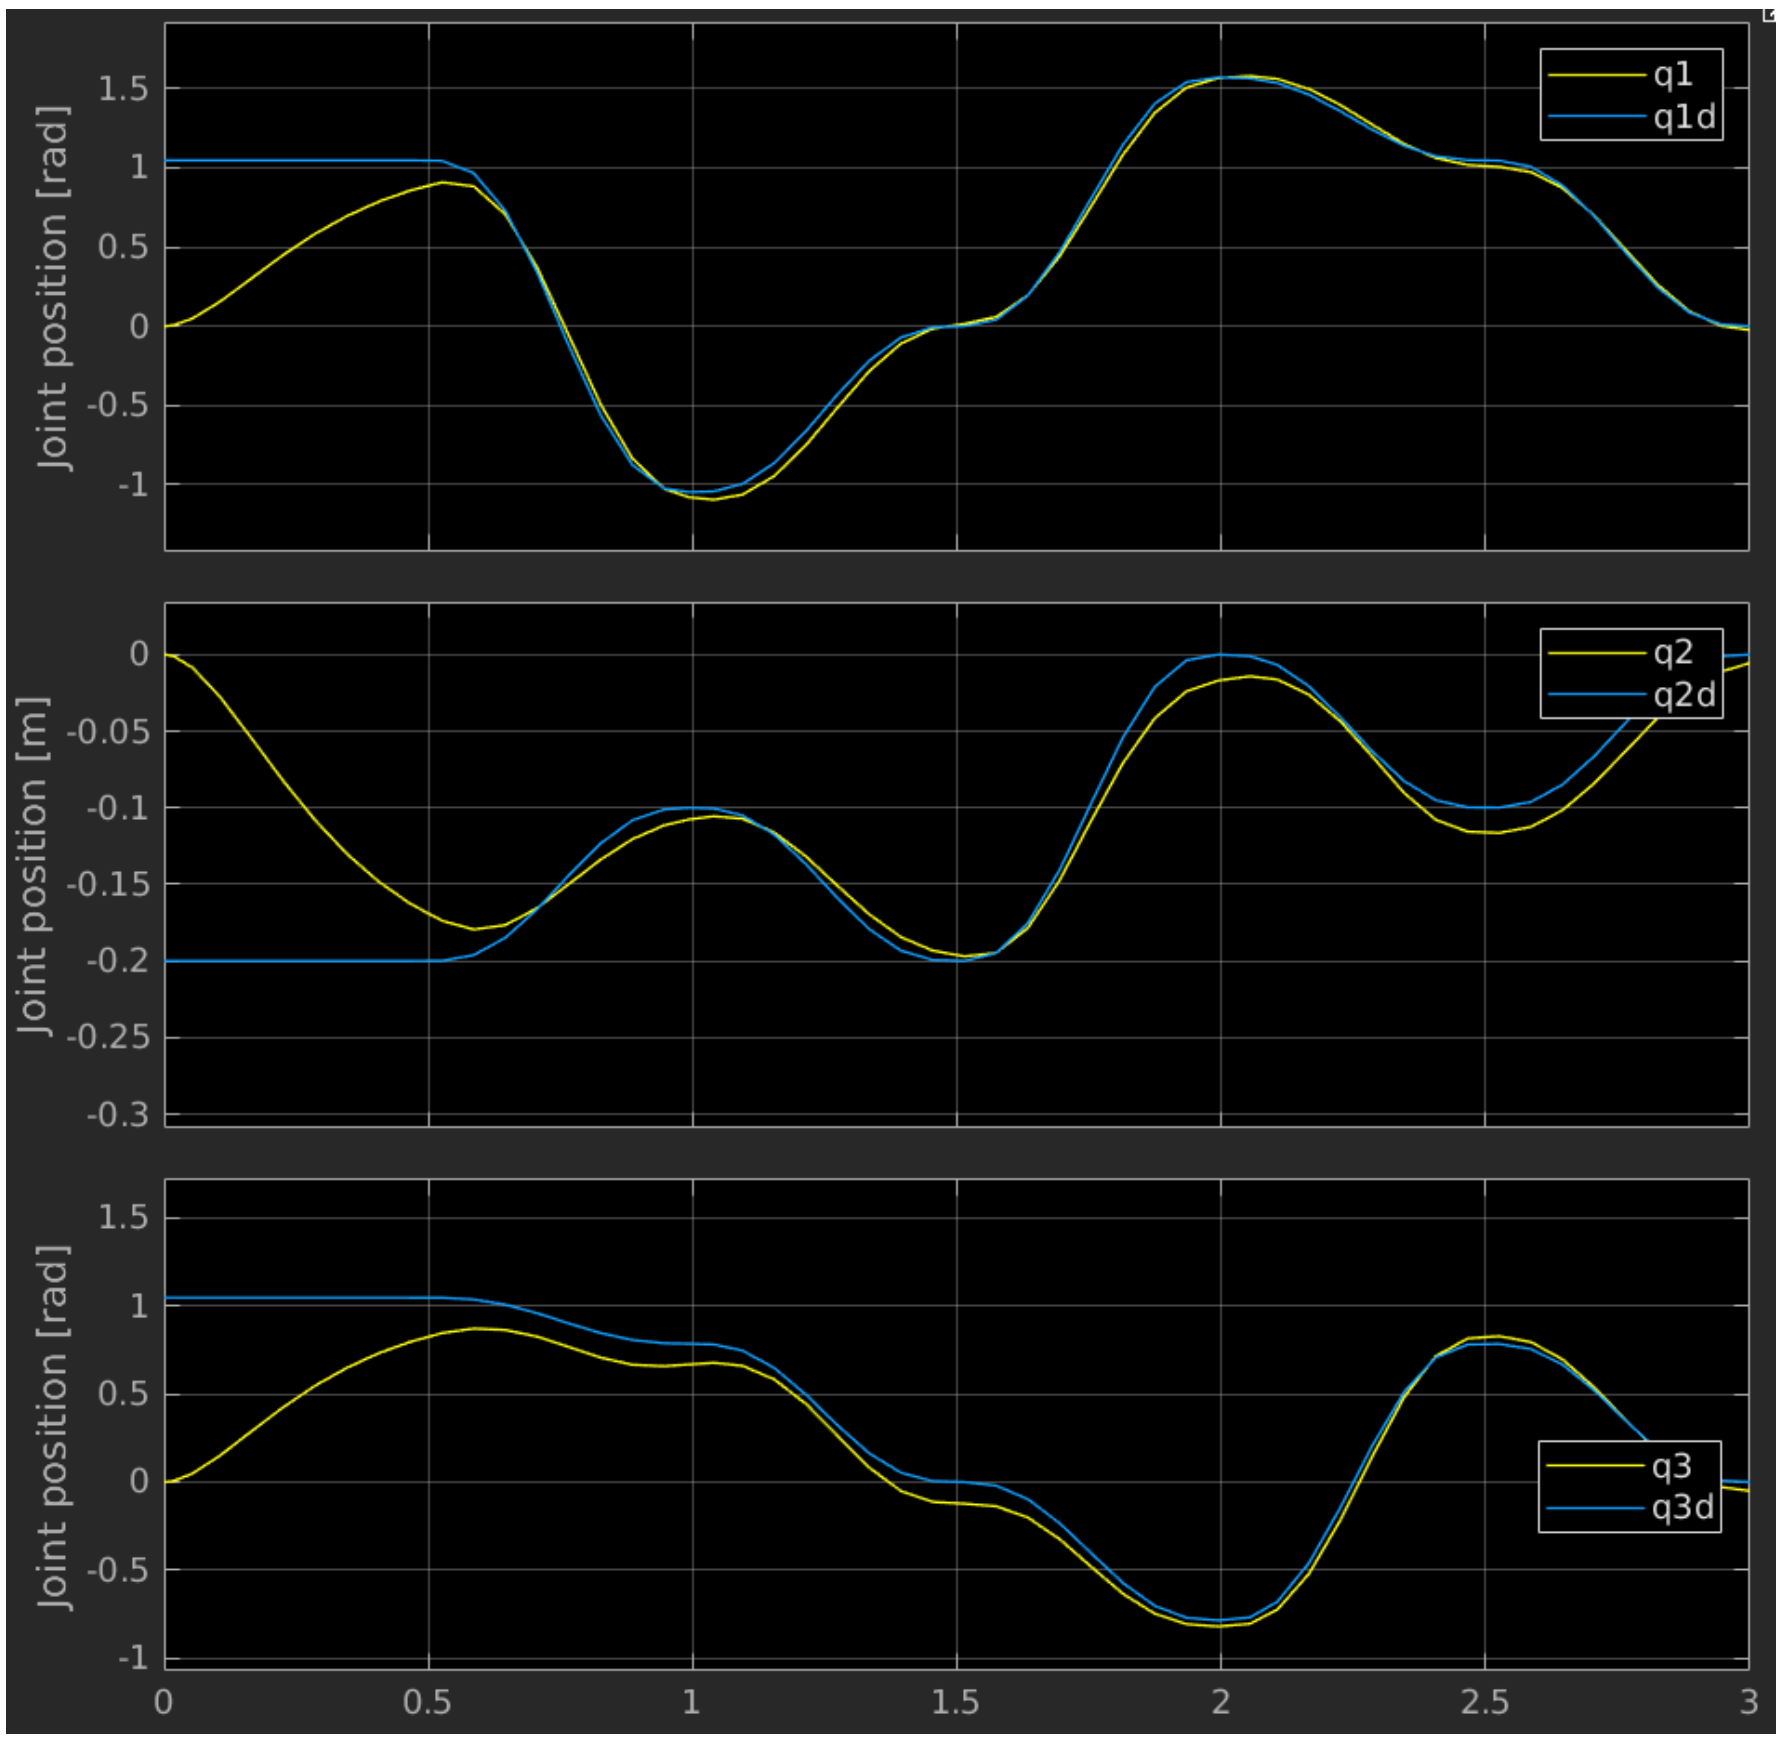

Figure 14: Joint positions - changed values of the link masses

7.3 What happens to the torque values when the settling time of the equivalent second order systems is chosen very small?

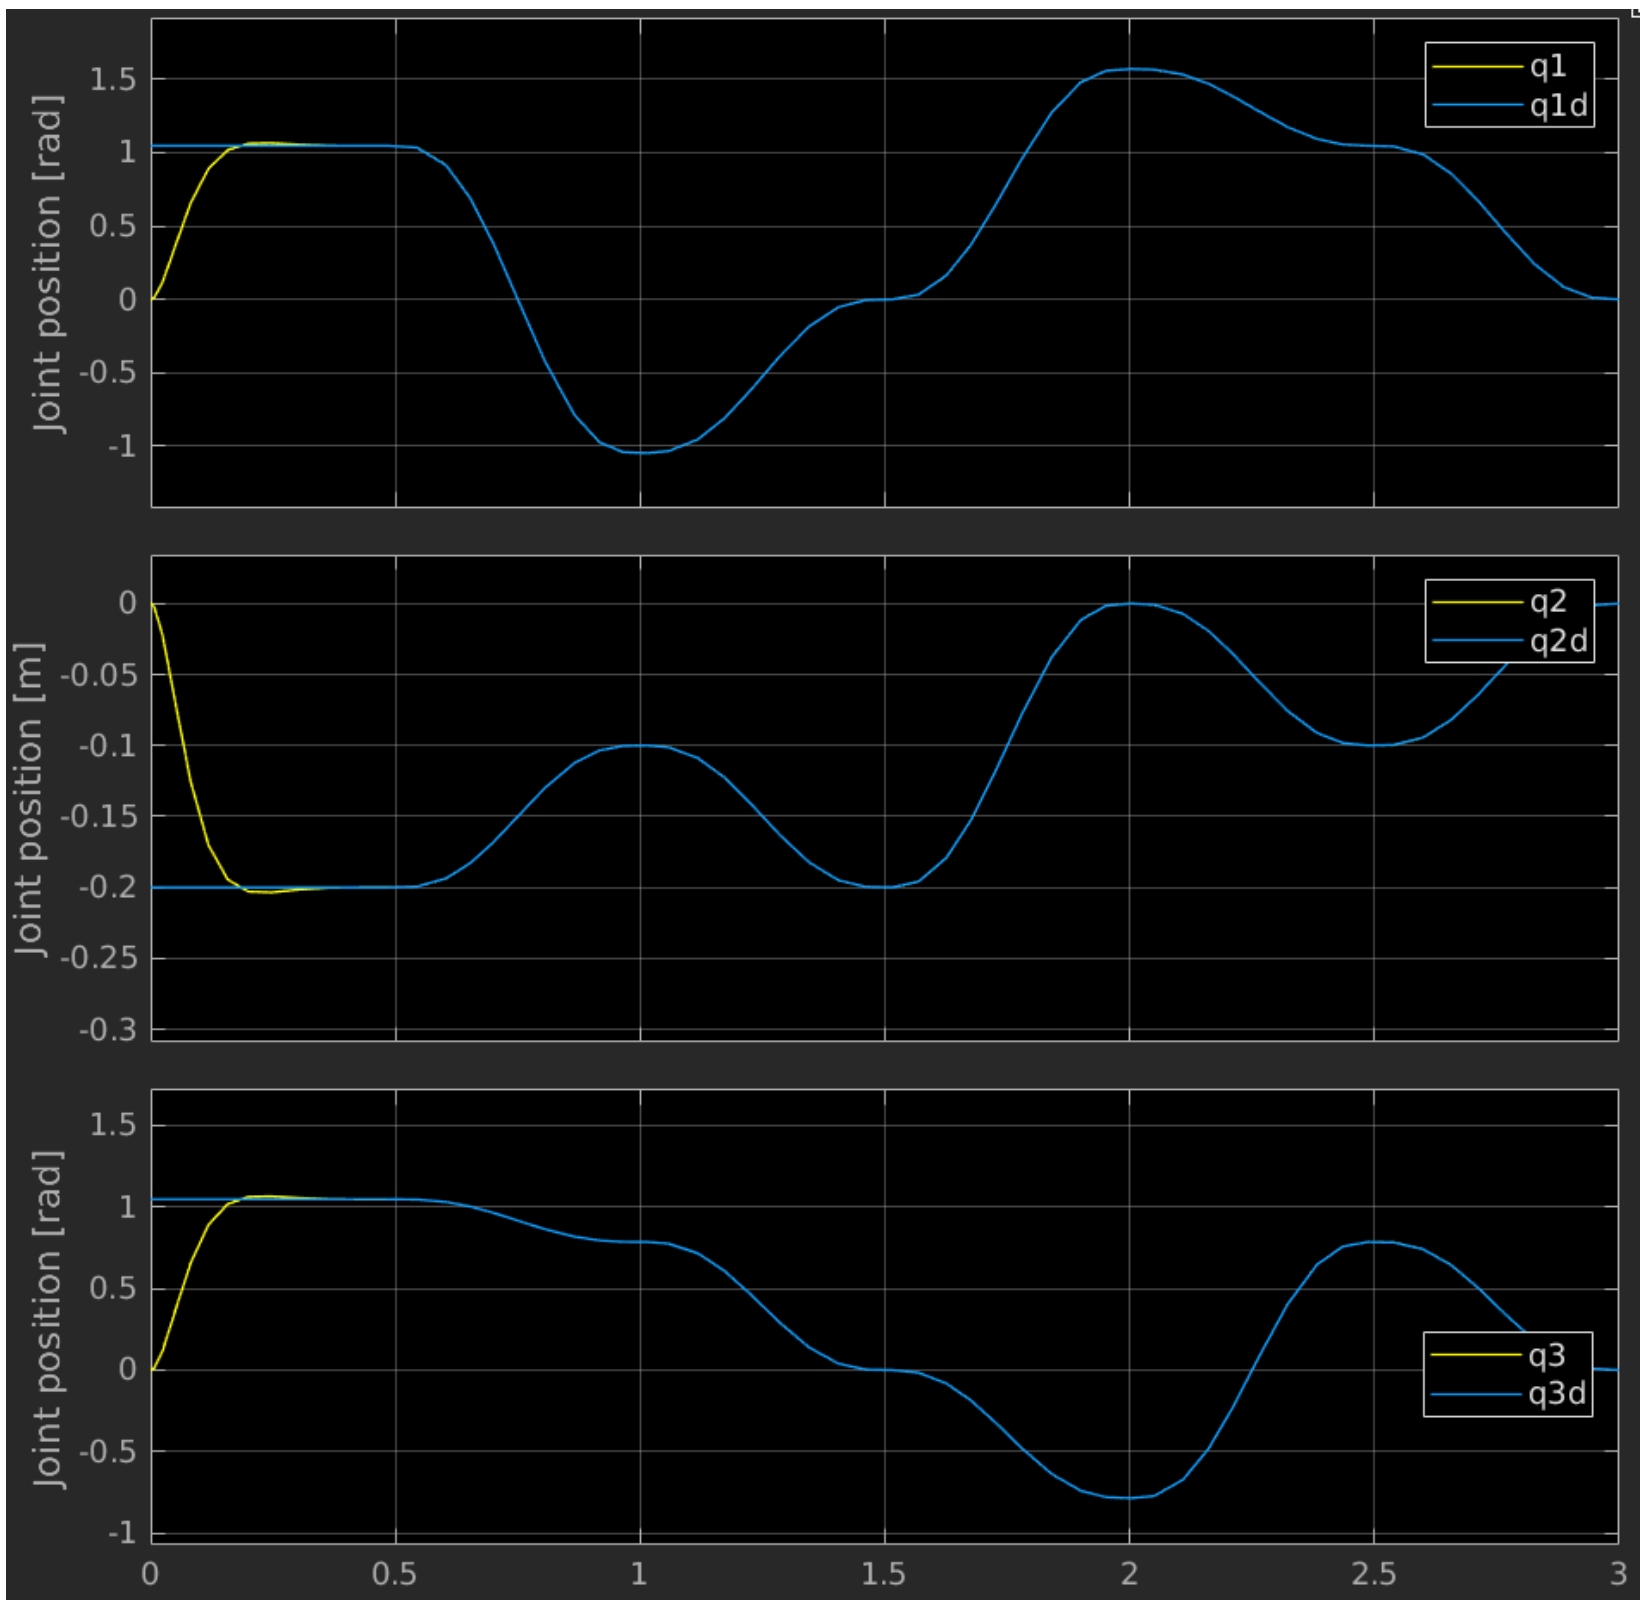

Figure 15: Joint positions - $K_P = 500, K_D = 35$

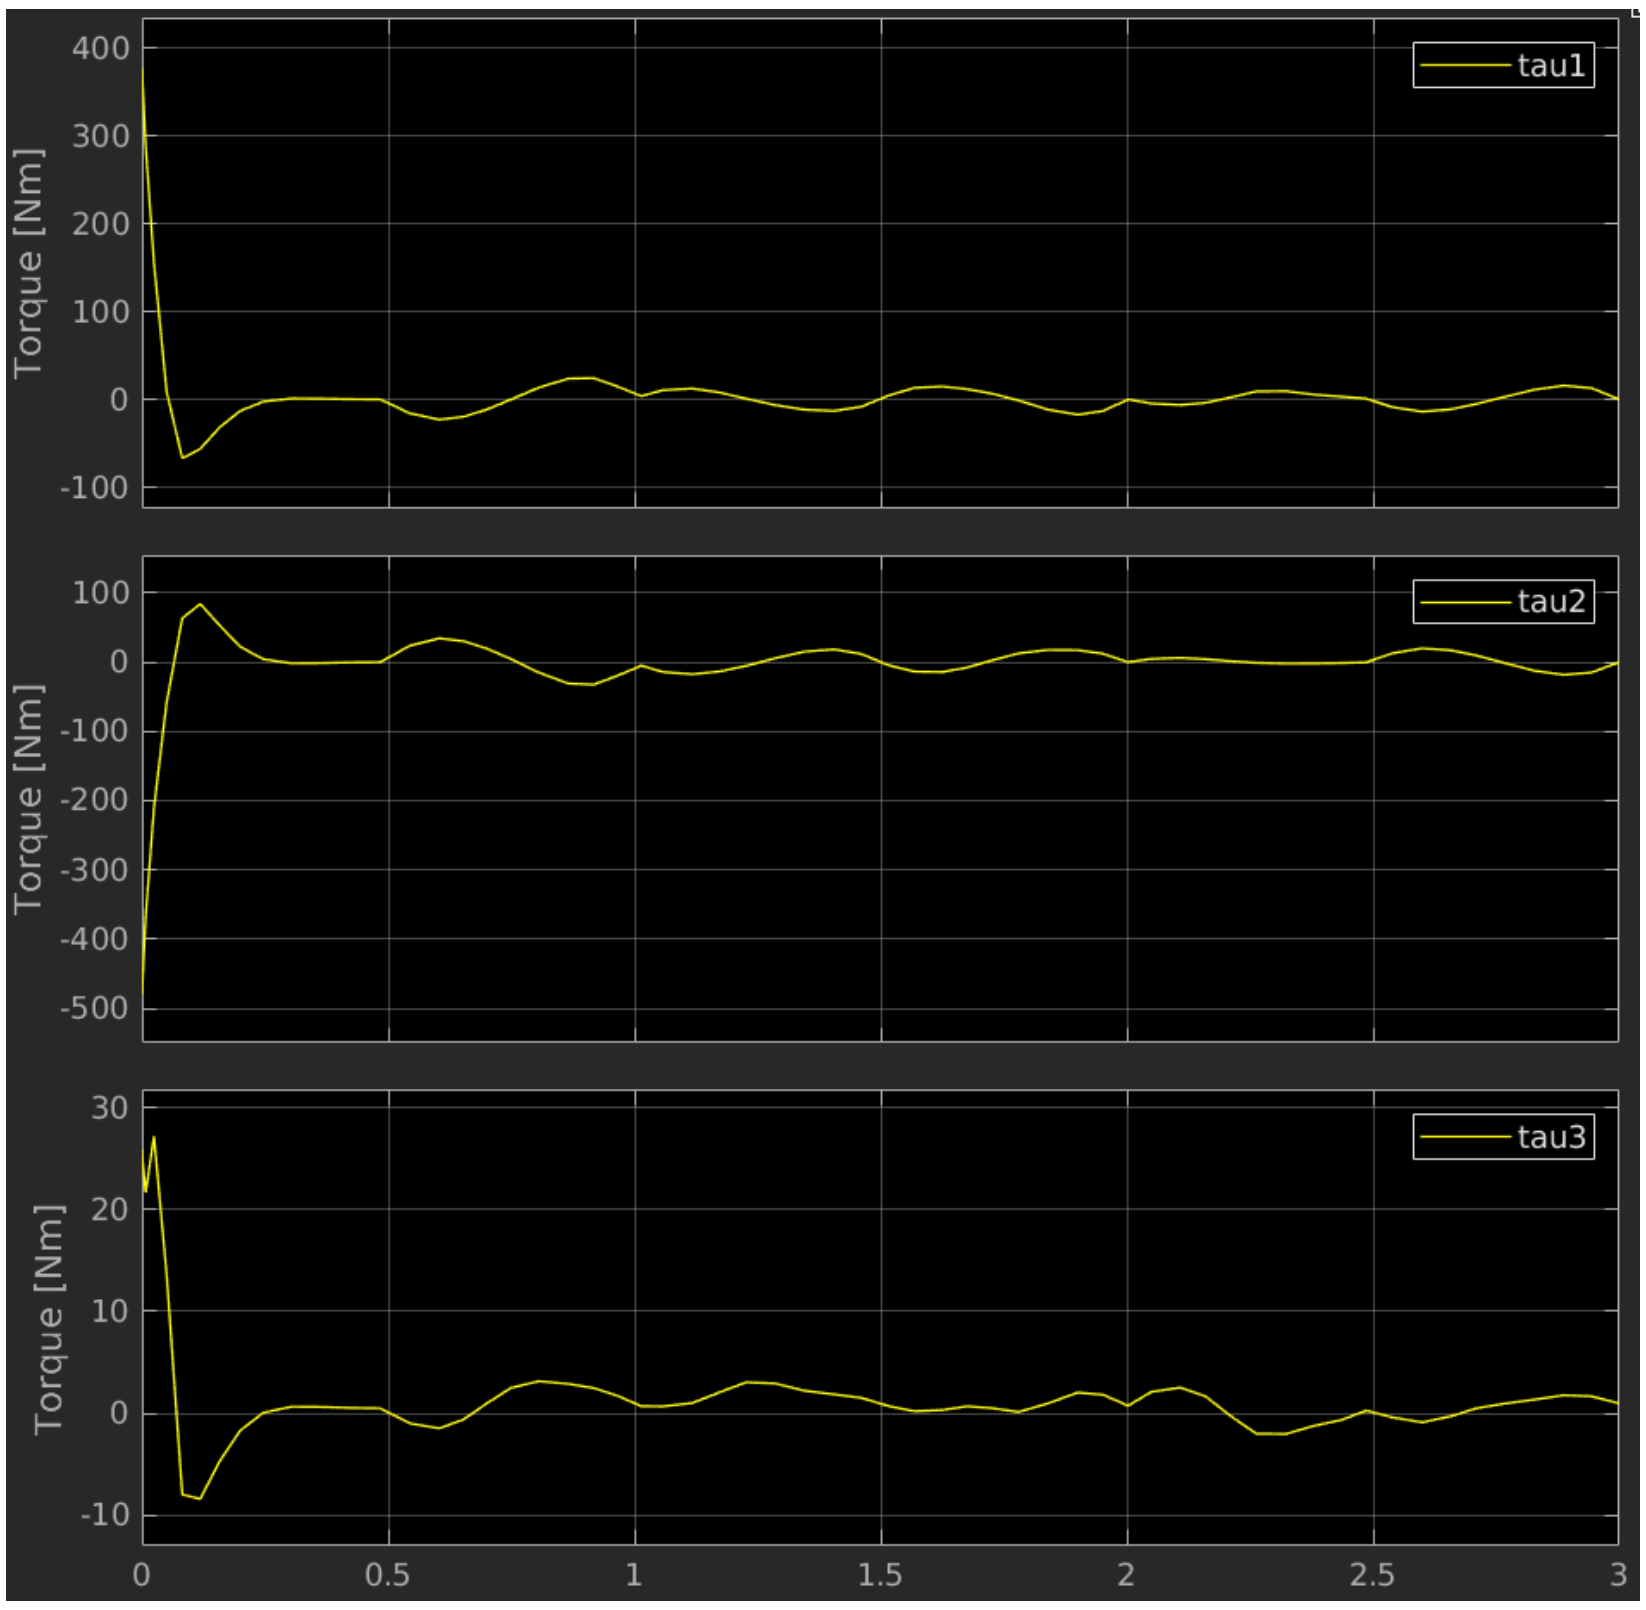

Figure 16: Joint torques - $K_P = 500, K_D = 35$

8 Assignment 8

8.1 Implement in Simulink the Adaptive Control law for the a 1-DoF link under gravity.

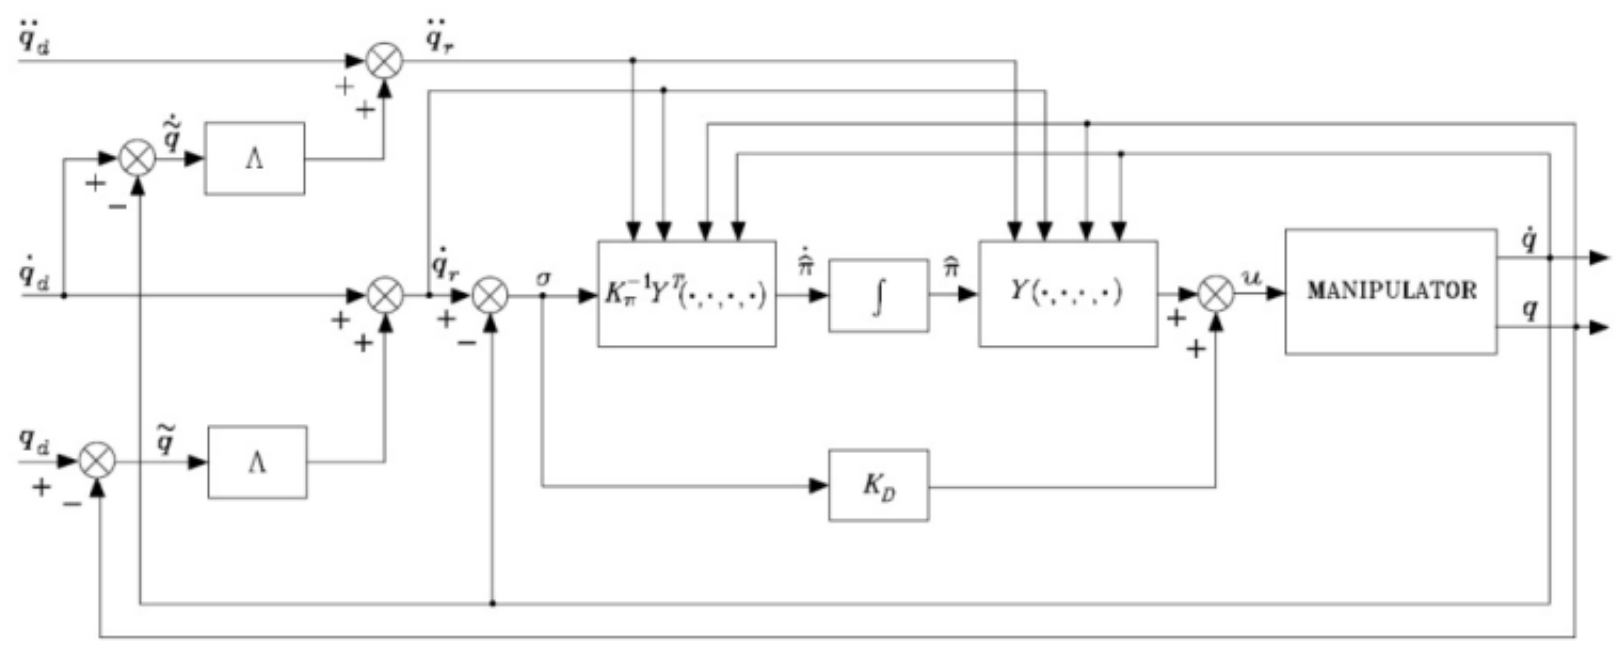

Figure 17: Adaptive control architecture

The adaptive control law tackles the problem of model uncertainty by implementing an on-line estimator of the robot's dynamic parameters.

The plant is modelled with three dynamic parameters (inertia, friction and gravity term):

$$I\ddot{q} + F\dot{q} + G\sin q = \tau \implies \tau = \begin{bmatrix} \ddot{q} & \dot{q} & \sin q \end{bmatrix} \begin{bmatrix} I \\ F \\ G \end{bmatrix} = Y(q, \dot{q}, \ddot{q})\Theta$$

The estimation of the dynamic parameters is as follows:

$$\hat{\Theta} = \begin{bmatrix} \hat{I} \\ \hat{F} \\ \hat{G} \end{bmatrix} = \begin{bmatrix} \gamma_1 & 0 & 0 \\ 0 & \gamma_2 & 0 \\ 0 & 0 & \gamma_3 \end{bmatrix} \begin{bmatrix} \ddot{q} \\ \dot{q} \\ \sin q \end{bmatrix} (\dot{q}_r - \dot{q})$$

where the reference velocity is computed as:

$$\dot{q}_r = \dot{q}_d + \lambda(q_d - q) = \dot{q}_d + \frac{K_P}{K_D}(q_d - q)$$

The architecture is implemented in SIMULINK as follows:

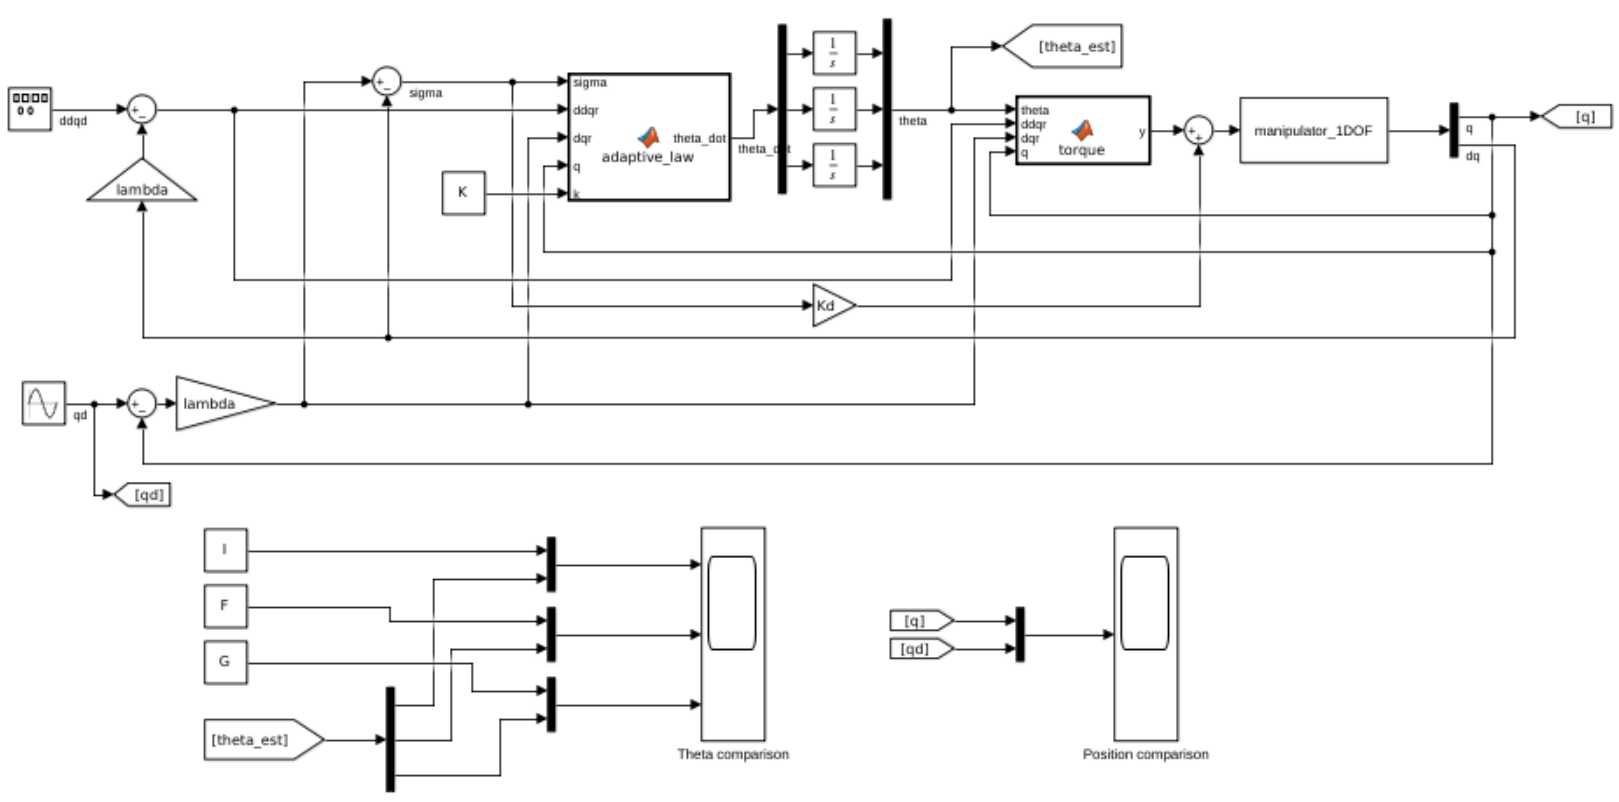

Figure 18: Adaptive control SIMULINK model

The model is tested with a sinusoidal reference trajectory $q_d = A\sin(\omega t)$ and a periodic square wave acceleration reference $\ddot{q}_d = square(\pm A)$, with $A = 1$ and $\omega = 2\pi$.

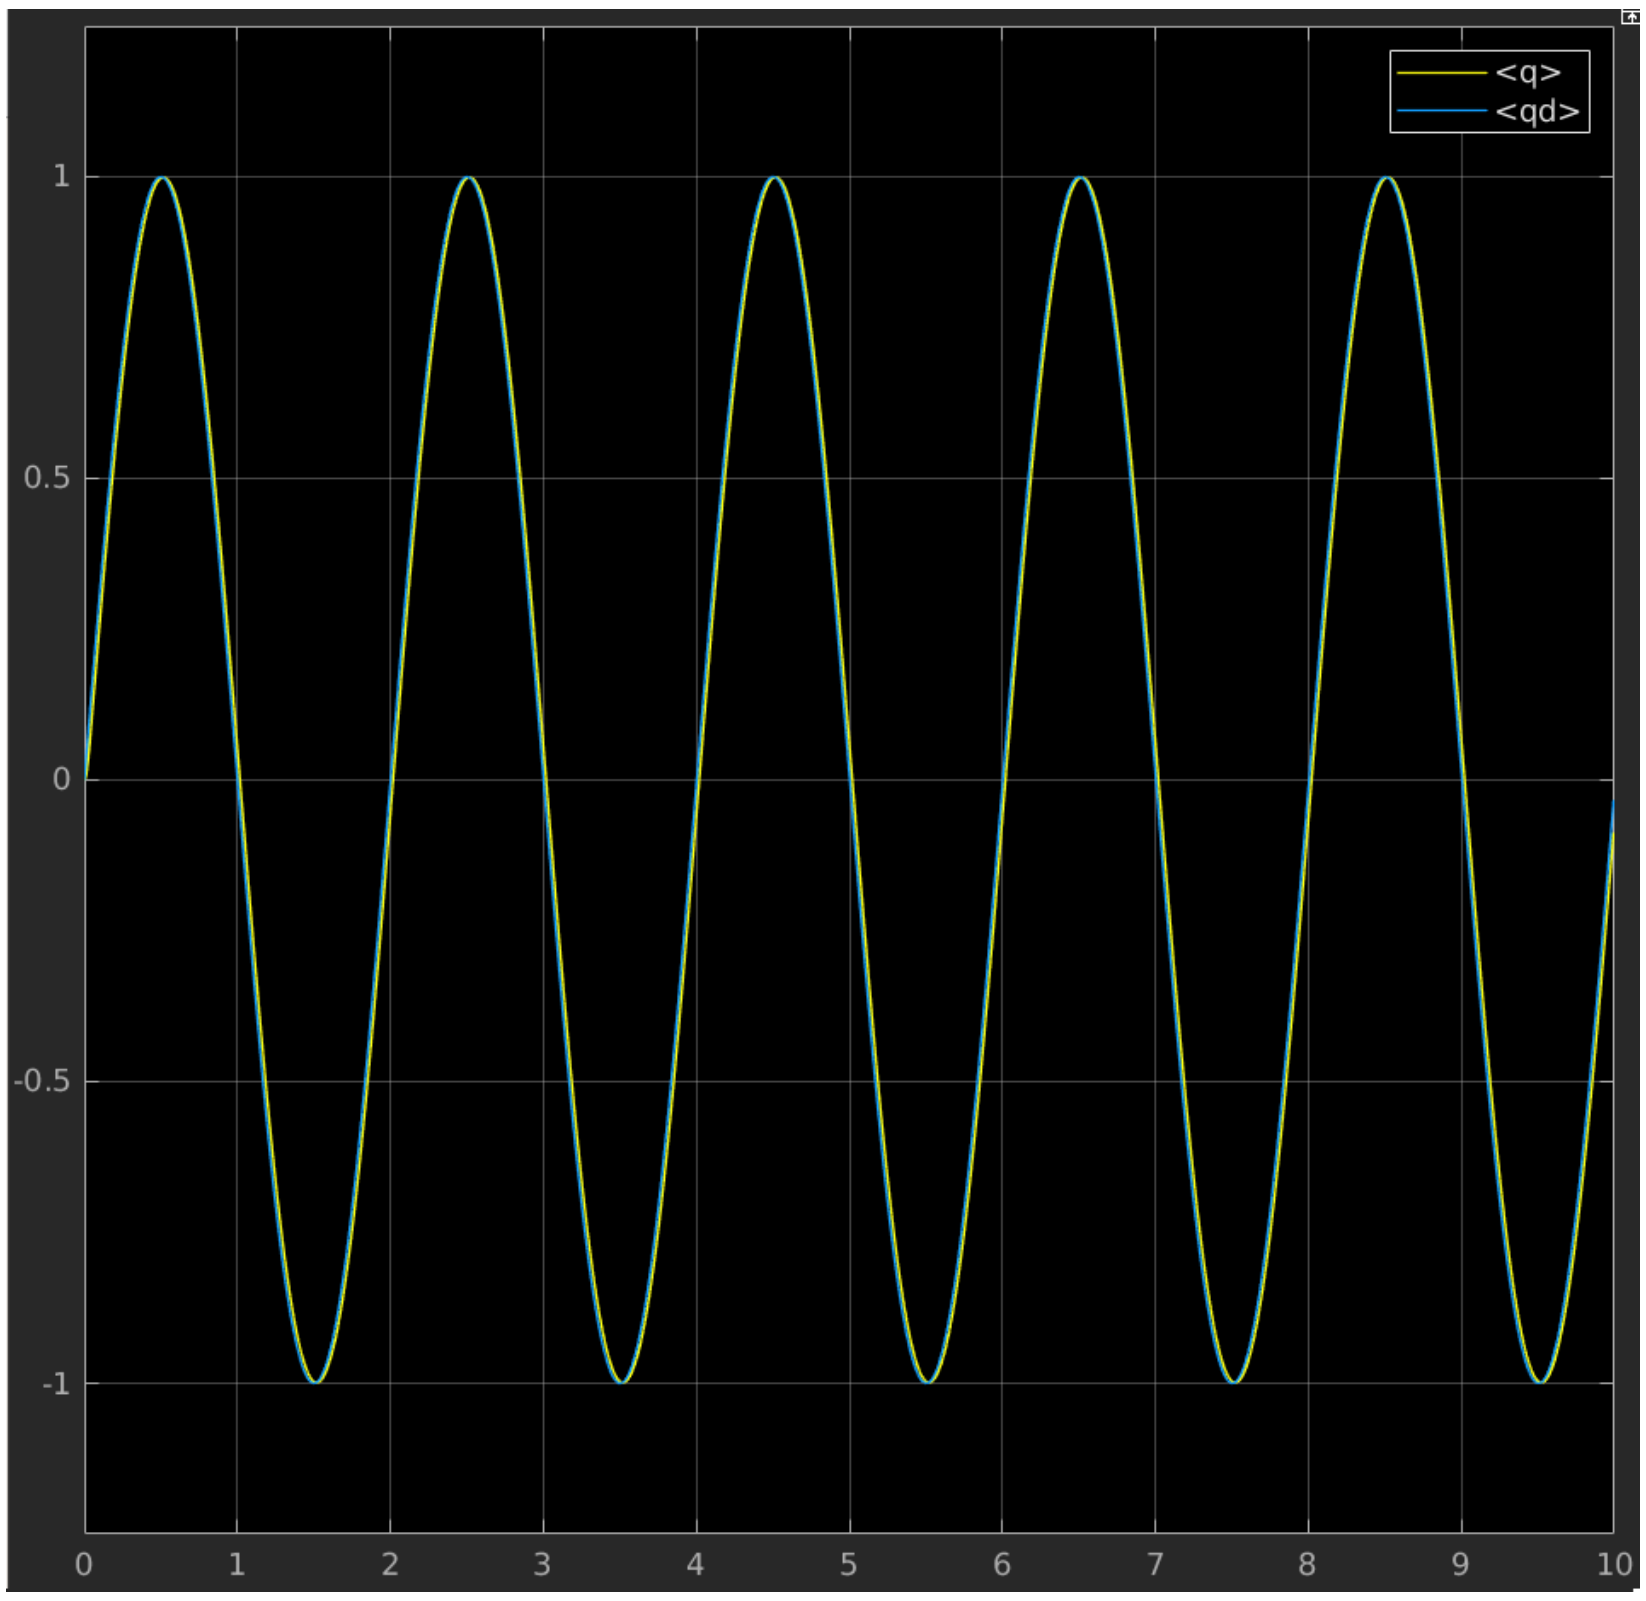

Figure 19: Adaptive control - position reference tracking

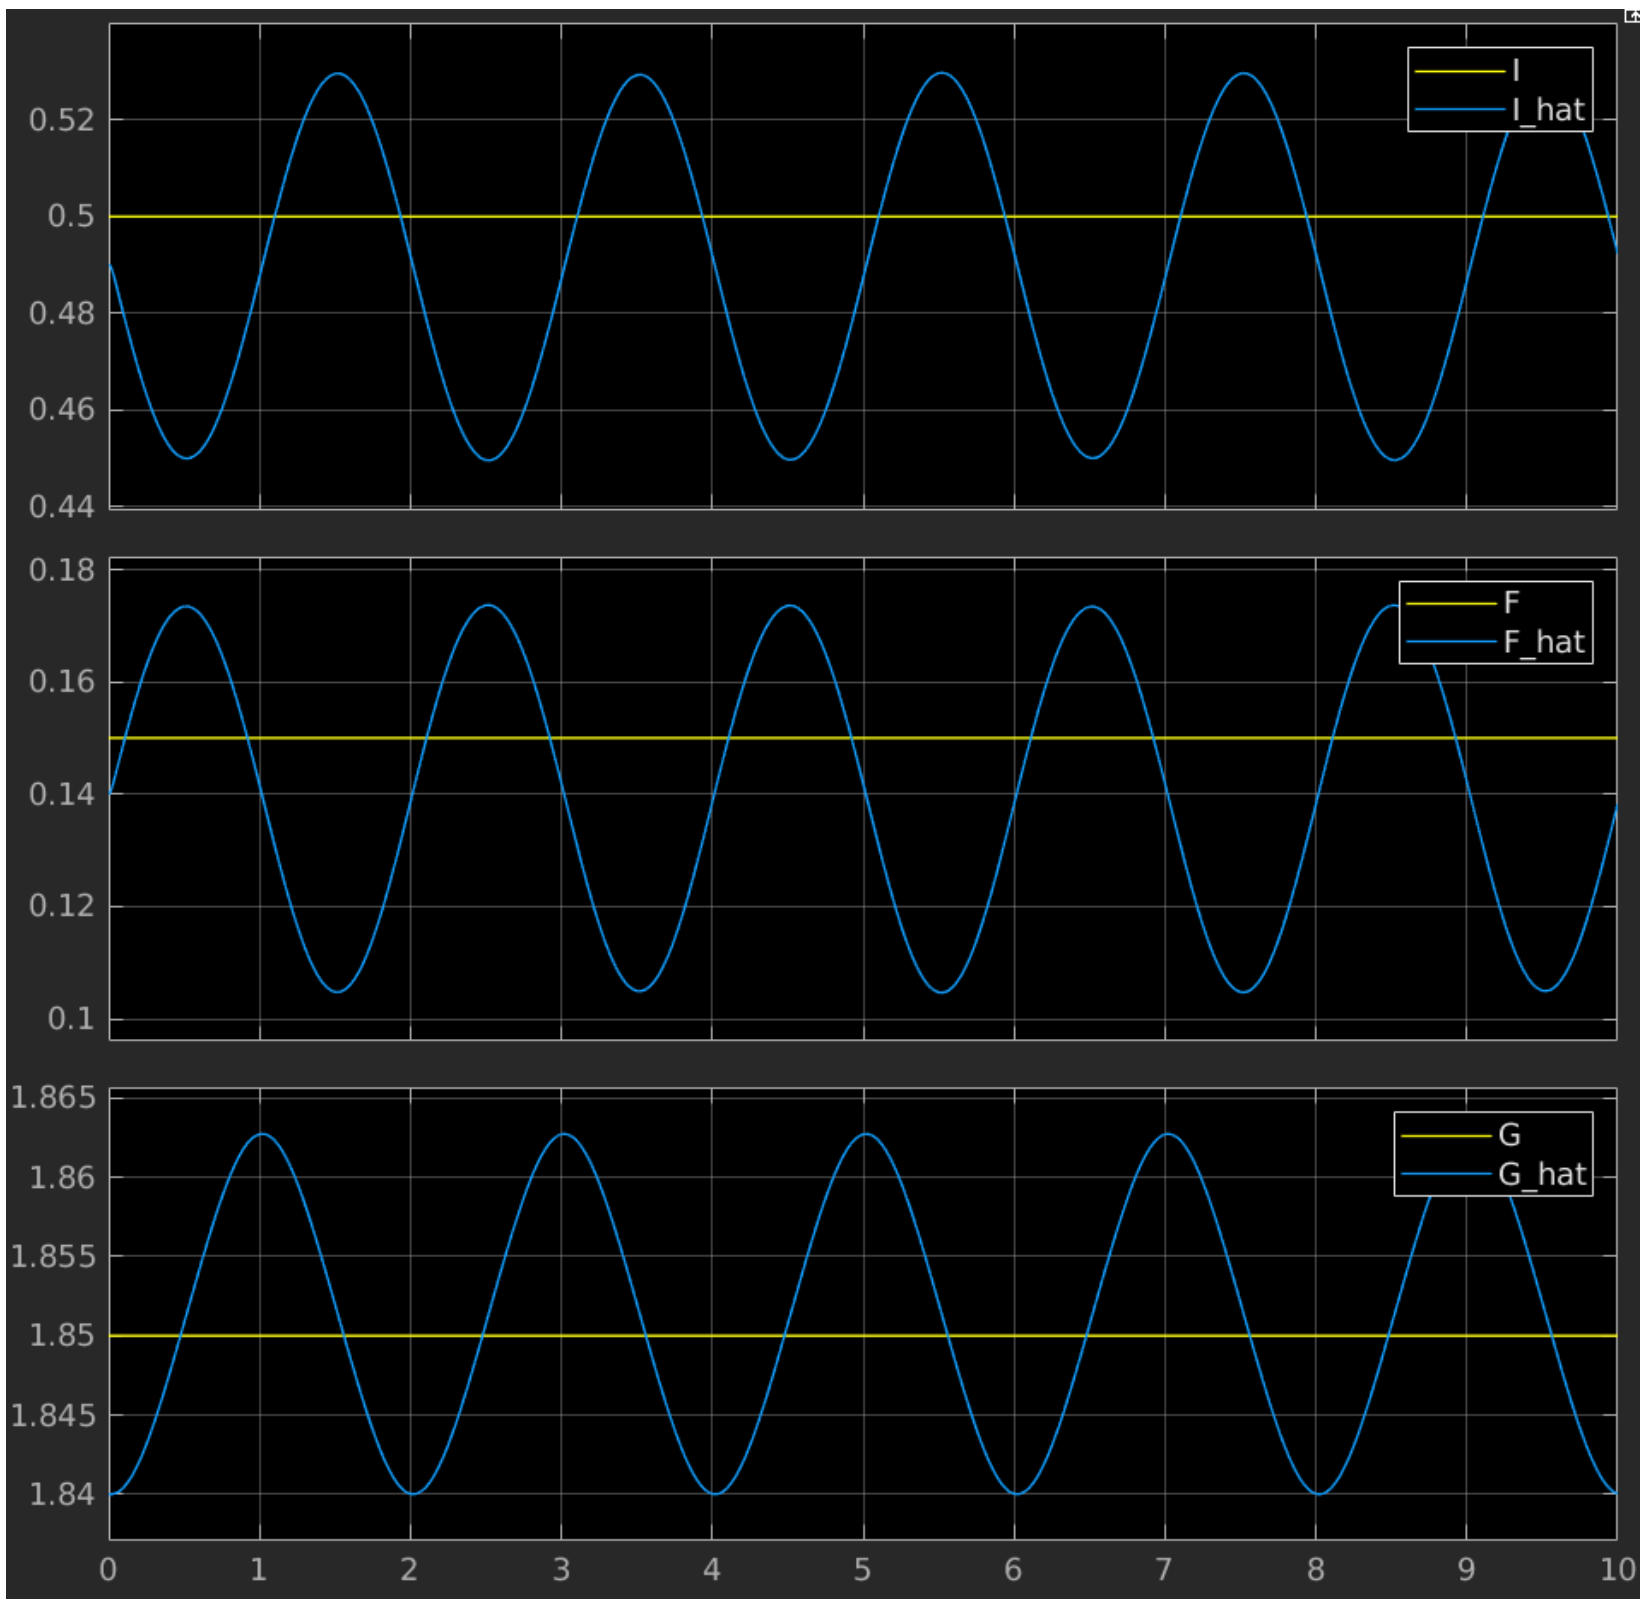

Figure 20: Adaptive control - parameter estimation

9 Assignment 9

9.1 Design the operational space PD control law with gravity compensation

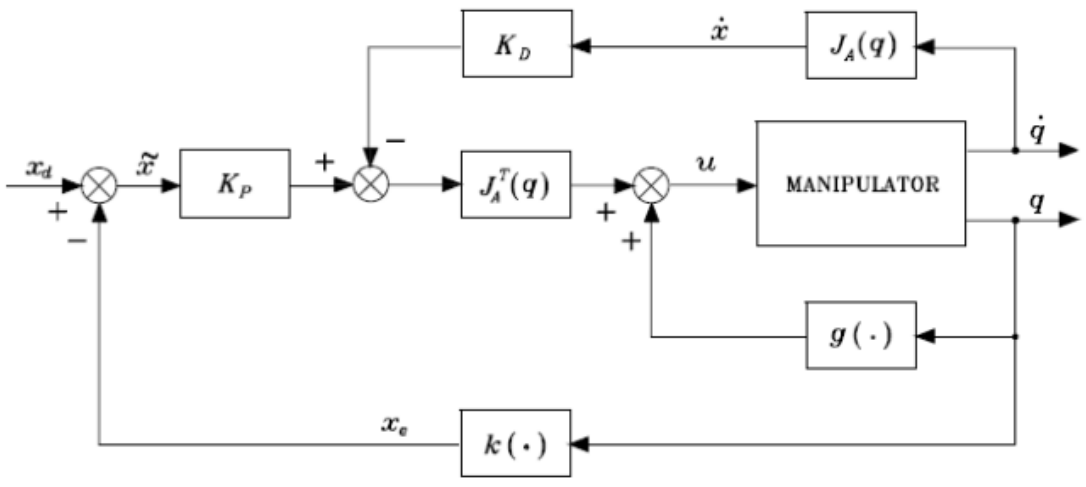

Figure 21: Operational space PD control law with gravity compensation architecture

The operational space PD control law with gravity compensation works exactly the same as the joint space one, except for the transformation of the joint space quantities into the corresponding operational space ones with direct kinematics (i.e. with the use of the transformation matrix T and of the analytical Jacobian JA). The control law parameters are $K_P = 50, K_D = 15$. The architecture was tested with a constant pose reference obtained by applying direct kinematics to the joint configuration $q = \begin{bmatrix} -\pi/3 & -0.1 & \pi/2 \end{bmatrix}$.

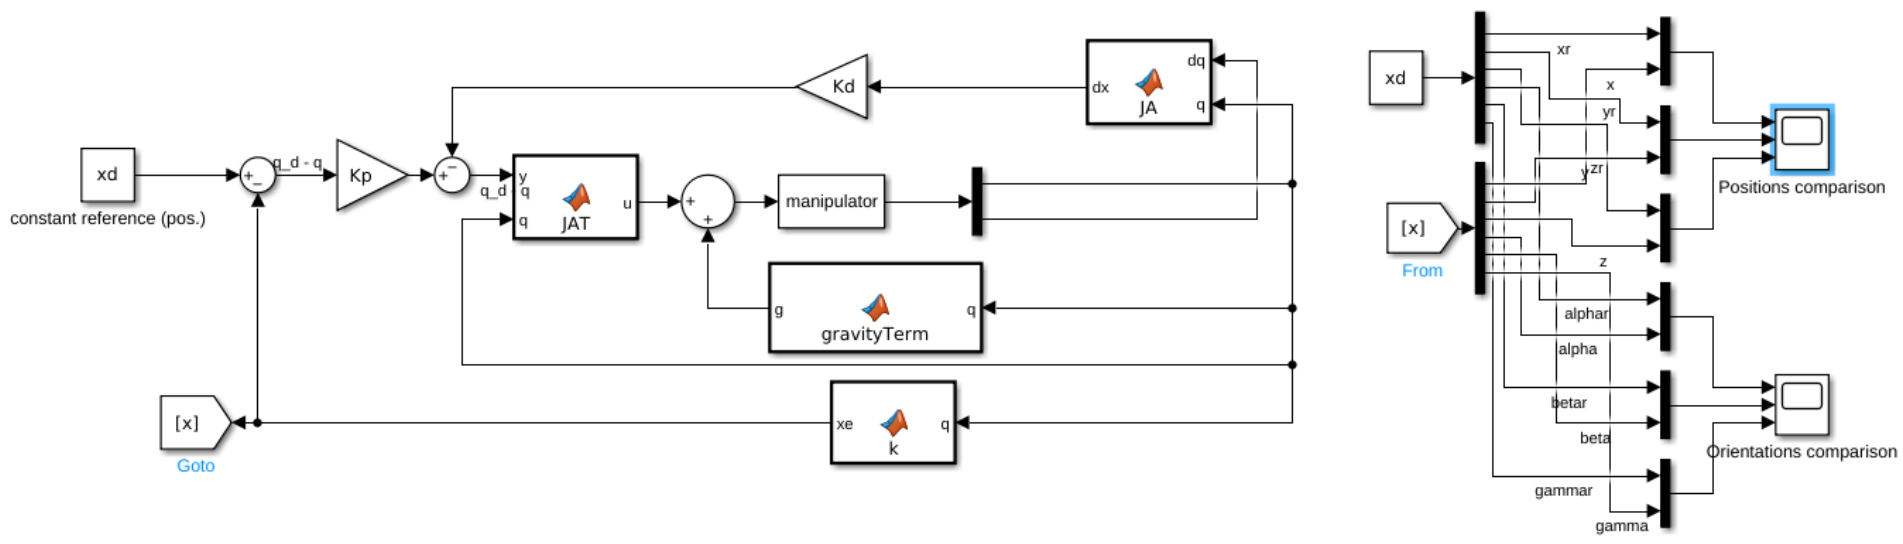

Figure 22: Operational space PD control law with gravity compensation SIMULINK model

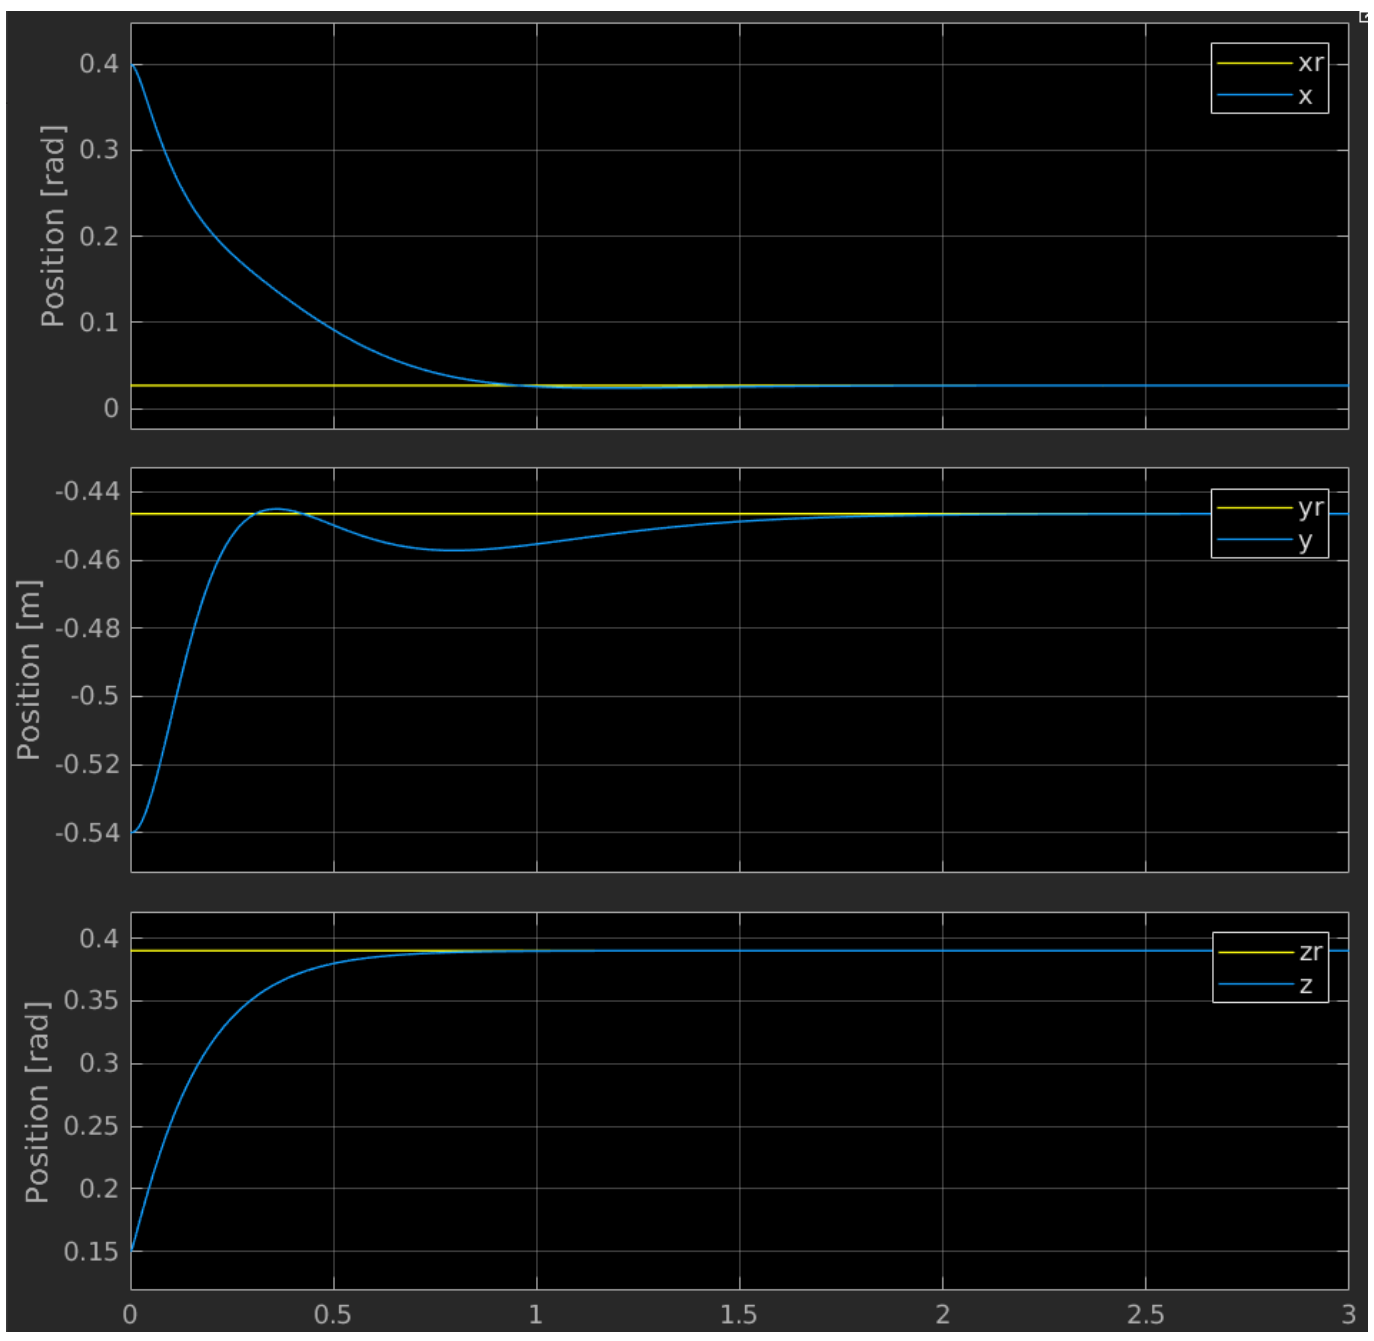

Figure 23: Pose tracking - end-effector xyz coordinates

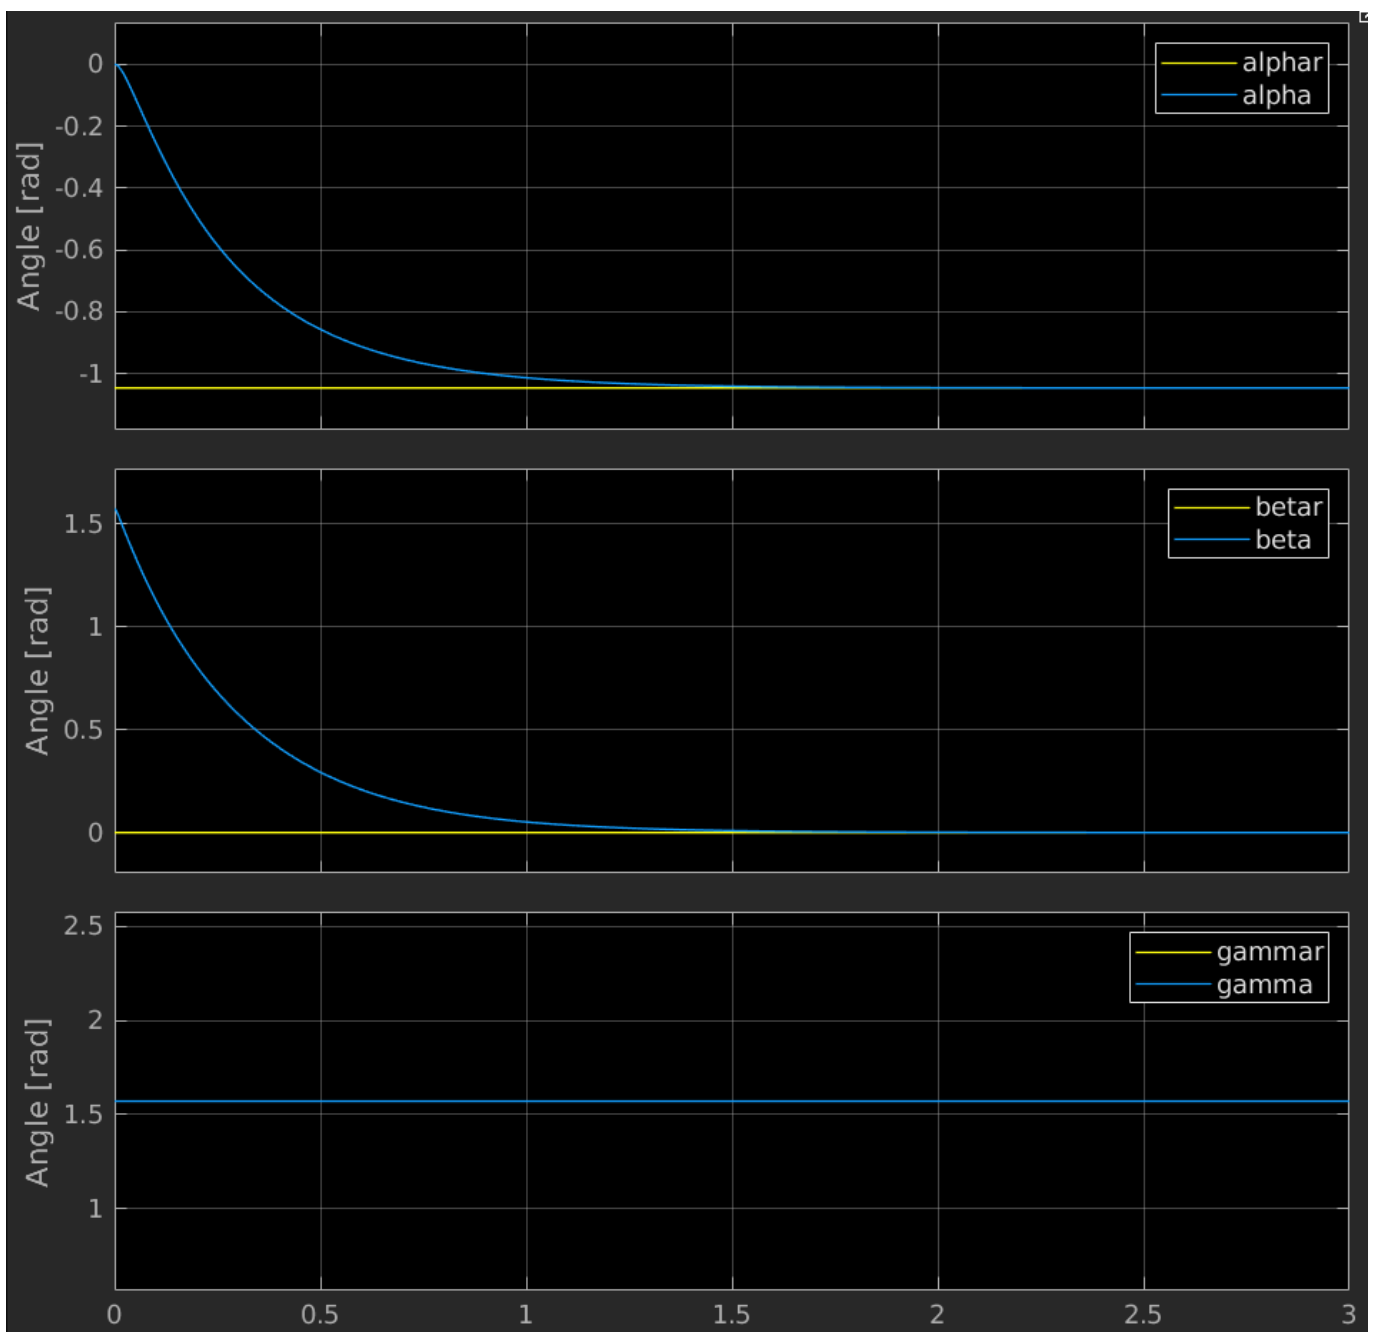

Figure 24: Pose tracking - end-effector $\alpha\beta\gamma$ coordinates

10 Assignment 10

10.1 Design the operational space inverse dynamics control law

11 Assignment 11

11.1 Study the compliance control. Simulate the two "extreme" cases when the end-effector is interacting with the environment (considered as a planar surface)

12 Assignment 12

12.1 Implement the impedance control in the operational space

13 Assignment 13

13.1 Implement the admittance control in the operational space

14 Assignment 14

14.1 Implement the force control with inner position loop

15 Assignment 15

15.1 Implement the parallel force/position control