
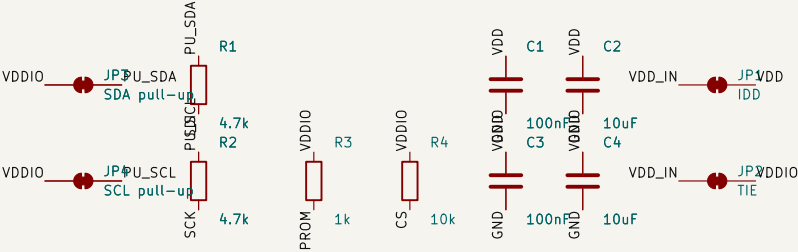




Board A: Bosch Shuttle Board 3.0 to 2.54 mm header, 3.3 V only, never 5 V.
J2 odd pins 1–15 = shuttle GPIO0–7 (on the BME690 8x shuttle these are the eight chip selects).
J2 even pins: 2 VDDIO, 4 VDD, 6 GND, 8 SCK/SCL, 10 SDO, 12 SDI/SDA, 14 CS, 16 PROM_RW (shuttle ID chip).



Solder jumpers, all closed as made:
JP1 IDD: cut it and put a meter across J3 to measure the sensor's VDD current.
JP2 TIE: VDD and VDDIO from one supply. Cut it to feed VDDIO separately on J2–2.
JP3 / JP4: 4.7k I2C pull-ups on SDA / SCL. Cut to remove them (e.g. for SPI or when the host has its own).

R3 1k: PROM_RW pull-up for the DS28E05 1-Wire ID chip. Its datasheet allows 300–1500 ohm at 3.3 V (4.7k is too weak). The DS28E05 talks at 1-Wire overdrive speed only.
R4 10k: CS pull-up so single-sensor shuttles start in I2C mode. Drive CS low for SPI.

github.com/leakydata/bme690-toolkit
Bosch Shuttle Board 3.0 to 2.54 mm header

Sheet: /
File: board_a.kicad_sch

Title: Board A – Shuttle 3.0 breakout

Size: A4 Date: 2026–10–03

KiCad E.D.A. 10.0.6

Rev: 1

Id: 1/1