

## 1. Description


### 1.1. Project

Project Name	KETI_Mobius_EndDiv
Board Name	NUCLEO-F446RE
Generated with:	STM32CubeMX 4.16.1
Date	10/03/2016

### 1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F446
MCU name	STM32F446RETx
MCU Package	LQFP64
MCU Pin number	64

## 2. Pinout Configuration

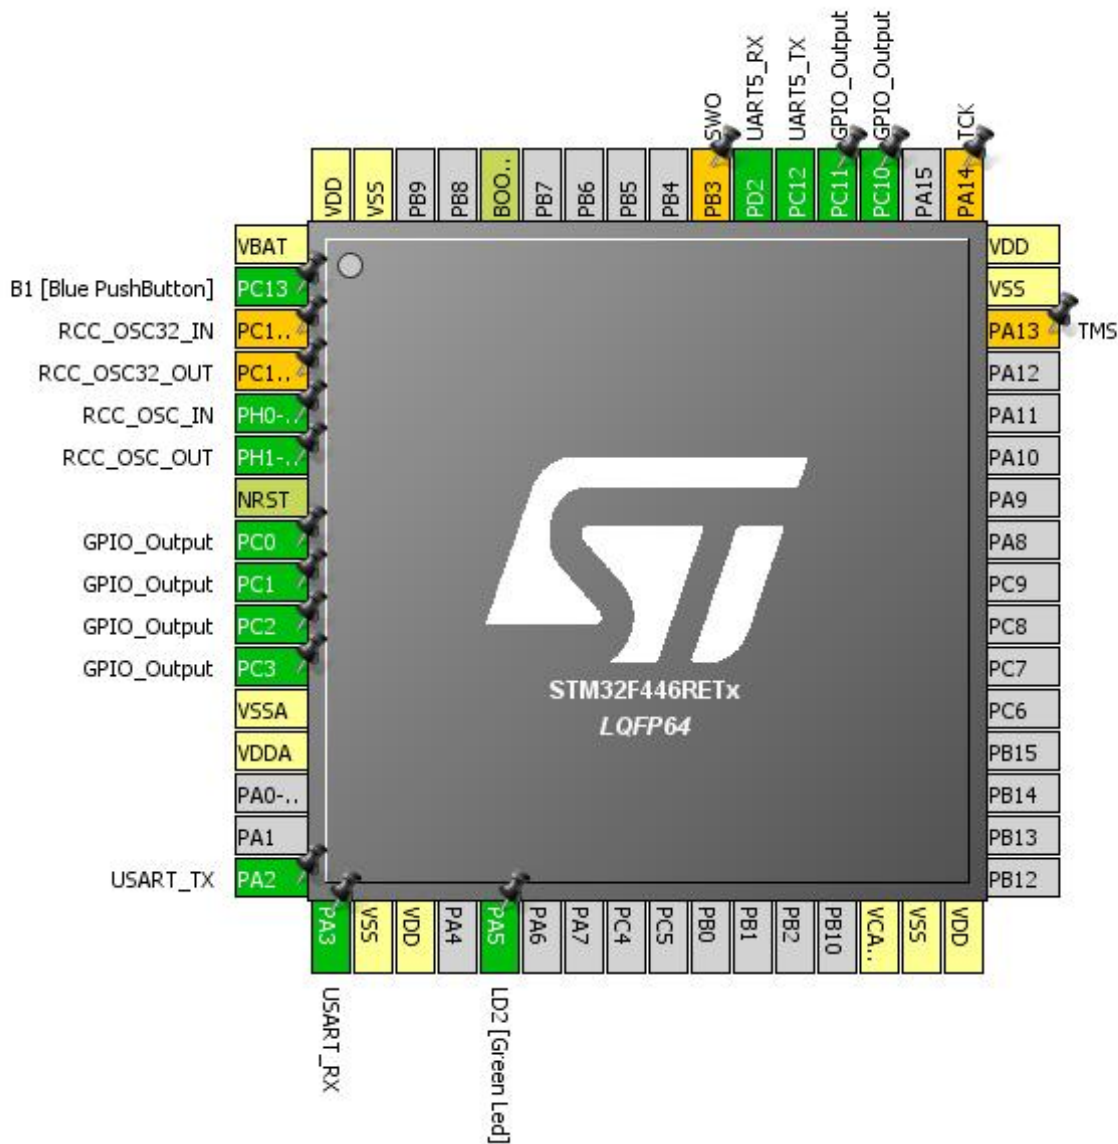

### 3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN *	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT *	I/O	RCC_OSC32_OUT	
5	PH0-OSC_IN	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	PC0 **	I/O	GPIO_Output	
9	PC1 **	I/O	GPIO_Output	
10	PC2 **	I/O	GPIO_Output	
11	PC3 **	I/O	GPIO_Output	
12	VSSA	Power		
13	VDDA	Power		
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 **	I/O	GPIO_Output	LD2 [Green Led]
30	VCAP_1	Power		
31	VSS	Power		
32	VDD	Power		
46	PA13 *	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDD	Power		
49	PA14 *	I/O	SYS_JTCK-SWCLK	TCK
51	PC10 **	I/O	GPIO_Output	
52	PC11 **	I/O	GPIO_Output	
53	PC12	I/O	UART5_TX	
54	PD2	I/O	UART5_RX	
55	PB3 *	I/O	SYS_JTDO-SWO	SWO
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

\*\* The pin is affected with an I/O function

\* The pin is affected with a peripheral function but no peripheral mode is activated



## 5. IPs and Middleware Configuration

### 5.1. RCC

#### High Speed Clock (HSE): Crystal/Ceramic Resonator

##### 5.1.1. Parameter Settings:

###### System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

###### RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

###### Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
Power Over Drive	Enabled

### 5.2. SYS

#### Timebase Source: SysTick

### 5.3. TIM2

#### Clock Source : Internal Clock

##### 5.3.1. Parameter Settings:

###### Counter Settings:

Prescaler (PSC - 16 bits value)	9000 *
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value )	29999 *
Internal Clock Division (CKD)	No Division

#### Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

## 5.4. TIM3

**Clock Source : Internal Clock**

### 5.4.1. Parameter Settings:

#### Counter Settings:

Prescaler (PSC - 16 bits value)	<b>9000 *</b>
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	<b>4999 *</b>
Internal Clock Division (CKD)	No Division

#### Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

## 5.5. TIM4

**mode: Clock Source**

### 5.5.1. Parameter Settings:

#### Counter Settings:

Prescaler (PSC - 16 bits value)	<b>9000 *</b>
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	<b>999 *</b>
Internal Clock Division (CKD)	No Division

#### Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

## 5.6. UART5

## Mode: Asynchronous

### 5.6.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

## 5.7. USART2

## Mode: Asynchronous

### 5.7.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

\* User modified value



## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
UART5	PC12	UART5_TX	Alternate Function Push Pull	Pull-up	Very High *	
	PD2	UART5_RX	Alternate Function Push Pull	Pull-up	Very High *	
USART2	PA2	USART2_TX	Alternate Function Push Pull	Pull-up	Very High *	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	Pull-up	Very High *	USART_RX
Single Mapped Signals	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PC13	GPIO_EXTI13	<b>External Event Mode with Rising edge trigger detection *</b>	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PC0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PC1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PC2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PC3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [Green Led]
	PC10	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PC11	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	

## **6.2. DMA configuration**

nothing configured in DMA service

### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
TIM2 global interrupt	true	0	0
TIM3 global interrupt	true	0	0
TIM4 global interrupt	true	0	0
USART2 global interrupt	true	0	0
UART5 global interrupt	true	0	2
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
FPU global interrupt	unused		

\* User modified value

## ***7. Power Consumption Calculator report***

### 7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F446
MCU	STM32F446RETx
Datasheet	027107_Rev5

### 7.2. Parameter Selection

Temperature	25
Vdd	null

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	KETI_Mobius_EndDiv
Project Folder	C:\Users\sohae\Desktop\STM32F446RET6_HAL\KETI_Mobius_EndDiv
Toolchain / IDE	TrueSTUDIO
Firmware Package Name and Version	STM32Cube FW_F4 V1.13.0

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No