



CSM V3 -- HMI Module 10 -- LED Strip Holder V1.0

Work-area lighting: 150 mm channel for 5 V LED strip, zip-ties to beam

Isometric View

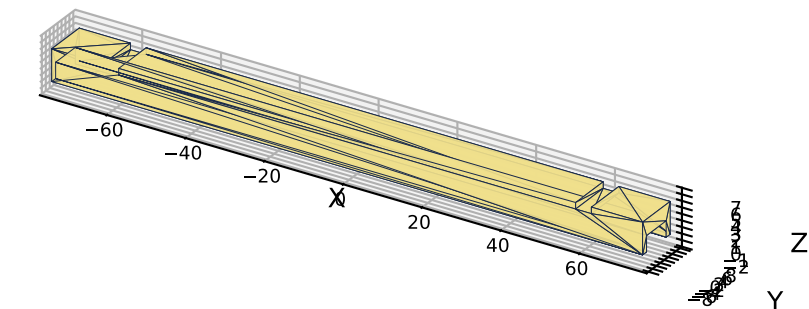


Top View (against beam) -- 2 zip-tie grooves




PART	LED Strip Holder
NUMBER	M10-P09
VERSION	V1.0 (DRAFT)
MODULE	10 -- HMI
QTY	1
MATERIAL	PETG (PA12 prod)
INFILL	100%, 4 walls
LAYER	0.2 mm
MASS	~8.4 g
PRINT	flat, ~25 min
DIMENSIONS (mm)	
Holder	150 x 14 x 5
LED channel	10 wide x 2.5 deep
Channel face	BOTTOM (LED out)
Zip-tie grooves	2x 4 x 1 at X=+/-60
LED strip	5V, 10 x 2-3 mm
Mounts to	beam underside

Bottom View (LED side) -- strip channel

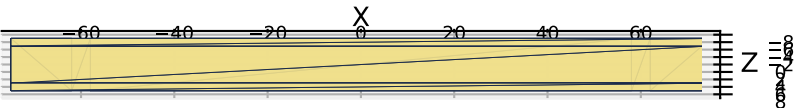

End View -- 14 x 5 mm cross-section

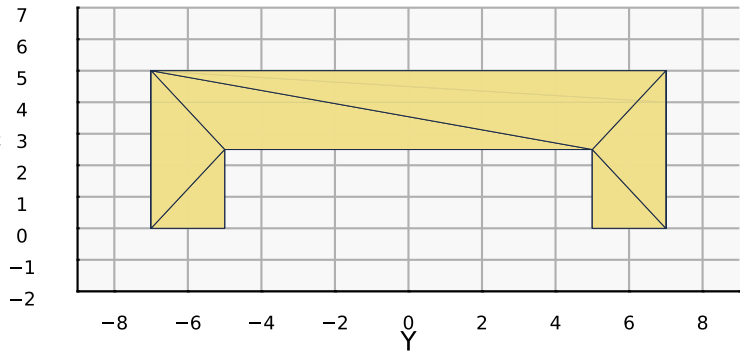

ASSEMBLY

1. Print PETG flat (TOP face down -- clean channel surface)
2. Solder leads to LED strip first (easier than working overhead)
3. Peel adhesive, press strip up into channel; LEDs face out / downward
4. Position against beam underside (clears Pi Carrier in center)
5. Pass 2x 2.5 mm zip-ties UP through grooves, OVER beam top, back down, pull tight; grooves prevent X slide
6. Wire 5 V leads up rear mast face into beam cable channel; connect to:
 - Pi GPIO pin 2/4 (+5V) + 6/14 (GND)
 - or LM2596 buck #2 5V output

WALL CHECK: all 6 OK, min 1.5 mm

NO BOLTS NEEDED -- zip-tie only.
Coexists with Touchscreen Frame and Expansion Plate (uses different mounts).