

Pairwise Consensus Scoring for Robust Kalman Filtering in UWB Indoor Positioning

First Author, Second Author, and Third Author Department of Electronics and Telecommunications
University Name, City, Country

{first.author, second.author, third.author}@university.edu

Abstract—Ultra-wideband (UWB) indoor positioning systems suffer from measurement degradation caused by non-line-of-sight (NLOS) conditions and intermittent anchor failures, severely impairing localization accuracy. This letter proposes a *Pairwise Consensus* (PC) scoring mechanism that adaptively adjusts the measurement noise covariance of Kalman-family filters by evaluating inter-anchor geometric consistency using a heavy-tailed Student- t kernel. The proposed method is generic and can be integrated into any Kalman filter variant—KF, EKF, or UKF—without requiring labeled data, channel models, or machine learning training. Experiments on real UWB ranging data collected in a 8.8×4 m indoor environment with four anchors demonstrate that PC scoring consistently improves all three filter variants, reducing RMSE by 13.5%–32.7% under line-of-sight (LOS) conditions. When integrated with UKF, the proposed PC-UKF achieves the lowest RMSE of 89.0 mm in LOS and 125.0 mm under intermittent anchor failure among all compared methods, including the standard UKF, Huber-UKF, MCC-UKF, and GUKF.

Index Terms—Indoor positioning, ultra-wideband, Kalman filter, robust estimation, pairwise consensus, anchor reliability

I. INTRODUCTION

ULTRA-WIDEBAND (UWB) technology has emerged as a promising solution for centimeter-level indoor positioning due to its fine time resolution and multipath resilience [1]. However, in practical indoor environments, non-line-of-sight (NLOS) conditions—caused by walls, furniture, and human bodies—introduce positive biases in ranging measurements, severely degrading positioning accuracy [2].

Existing approaches to mitigate unreliable UWB measurements broadly fall into three categories: *identification-then-mitigation*, where NLOS measurements are detected and either discarded or corrected [3]; *robust estimation*, which employs heavy-tailed cost functions or smoothing techniques to down-weight outliers [4]–[6], [8]; and *machine learning approaches*, which require large training datasets and may not generalize across environments [7]. A fourth paradigm—*inter-measurement consistency checking*—has been widely adopted in GNSS navigation through Receiver Autonomous Integrity Monitoring (RAIM) [9], [10], which exploits ranging redundancy to detect faulty satellites. However, such consistency-based techniques have seen limited application in UWB indoor positioning.

Robust Kalman filtering variants such as the Huber-UKF [4], Maximum Correntropy Criterion UKF (MCC-UKF) [5], [6], and Gaussian UKF (GUKF) [8] address outliers

by iteratively reweighting innovations or applying Gaussian smoothing to measurements. However, these methods evaluate each measurement independently and do not exploit the geometric consistency among multiple anchors.

In this letter, we propose a *Pairwise Consensus* (PC) scoring mechanism that assesses the reliability of each anchor by comparing its ranging residual against all other anchors using a Student- t kernel. The resulting consensus score is used to adaptively scale the measurement noise covariance R_i for each anchor: trusted anchors receive lower R_i (more influence), while suspicious anchors are penalized with higher R_i . This approach is:

- **Filter-agnostic**: applicable to KF, EKF, and UKF with minimal modification;
- **Label-free**: requires no labeled NLOS data or environment-specific calibration;
- **Lightweight**: adds only $\mathcal{O}(N^2)$ pairwise comparisons per timestep, where N is the number of anchors.

II. SYSTEM MODEL

A. UWB Ranging and Positioning

Consider N anchors at known 2D positions $\mathbf{a}_i = [a_{x,i}, a_{y,i}]^\top$, $i = 1, \dots, N$, mounted at a common height H above the ground plane. The slant-range measurement from anchor i to a ground-level tag at position $\mathbf{p} = [x, y]^\top$ is

$$z_i = \sqrt{(x - a_{x,i})^2 + (y - a_{y,i})^2 + H^2} + n_i + b_i, \quad (1)$$

where $n_i \sim \mathcal{N}(0, \sigma_n^2)$ is measurement noise and $b_i \geq 0$ is a non-negative NLOS bias.

The ground distance is recovered via $d_i = \sqrt{z_i^2 - H^2}$, and the tag position is estimated by least squares (LS) multilateration using anchor 0 as the reference [11]:

$$\hat{\mathbf{p}} = (\mathbf{A}^\top \mathbf{A})^{-1} \mathbf{A}^\top \mathbf{b}, \quad (2)$$

where $\mathbf{A}$ and $\mathbf{b}$ are the linearized geometry matrices.

B. Kalman Filter Variants

We consider a random-walk dynamic model $\mathbf{x}_k = \mathbf{x}_{k-1} + \mathbf{w}_k$, $\mathbf{w}_k \sim \mathcal{N}(\mathbf{0}, q\mathbf{I})$, where the state is the 2D position $\mathbf{x}_k = [x_k, y_k]^\top$.

KF: When applied at the range level, independent 1D Kalman filters smooth each anchor's distance series. The filtered distances are then fed to LS for positioning.

EKF: Operates directly on the 2D state with the nonlinear observation model $h_i(\mathbf{x}) = \sqrt{(x - a_{x,i})^2 + (y - a_{y,i})^2 + H^2}$ and its analytical Jacobian $\mathbf{H}$.

UKF: Uses the unscented transform with sigma points to handle the nonlinearity without requiring Jacobian computation, with parameters $\alpha = 10^{-3}$, $\beta = 2$, $\kappa = 0$.

III. PROPOSED PAIRWISE CONSENSUS SCORING

The core idea is to evaluate each anchor's measurement reliability by comparing its ranging residual with those of other anchors. An anchor whose residual is consistent with the majority is deemed trustworthy; an outlier anchor is penalized.

A. Consensus Score Computation

At each timestep k , given raw ground distances $\mathbf{d}_k = [d_{1,k}, \dots, d_{N,k}]^\top$:

Step 1 — Geometric residuals. Compute a preliminary LS position estimate $\hat{\mathbf{p}}_k$ from $\mathbf{d}_k$ using (2). The residual for anchor i is

$$r_i = |d_{i,k} - \|\hat{\mathbf{p}}_k - \mathbf{a}_i\|_2|. \quad (3)$$

Step 2 — Pairwise comparison. For each anchor pair (i, j) , compute the similarity using a Student- t kernel with ν degrees of freedom:

$$c_{ij} = \left(1 + \frac{(r_i - r_j)^2}{\nu\sigma^2}\right)^{-(\nu+1)/2}, \quad (4)$$

where σ is a bandwidth parameter controlling sensitivity. We set $\nu = 4$ and $\sigma = 300$ mm throughout. The Student- t kernel is preferred over the Gaussian kernel ($\nu \rightarrow \infty$) because its heavier tails provide greater tolerance to moderate residual discrepancies among anchors under normal conditions, while still penalizing large outliers. The choice $\nu = 4$ balances robustness (heavier tails than Gaussian) with sensitivity to genuinely corrupted measurements (lighter tails than the Cauchy kernel, $\nu = 1$).

Step 3 — Consensus score. The score for anchor i is the average pairwise agreement:

$$s_i = \frac{1}{N-1} \sum_{j \neq i} c_{ij}, \quad s_i \in [0, 1]. \quad (5)$$

A score $s_i \approx 1$ indicates that anchor i 's residual is consistent with all others (trusted), while $s_i \approx 0$ flags it as an outlier.

B. Adaptive Measurement Noise

The consensus scores are mapped to per-anchor measurement noise:

$$R_i = R_{\text{base}} \cdot (1 + R_{\text{scale}} \cdot (1 - s_i)). \quad (6)$$

In our experiments, we set $R_{\text{base}} = 50$ mm² and $R_{\text{scale}} = 5$, selected via cross-validation on a held-out LOS run. This construction ensures:

- *Trusted anchor* ($s_i \rightarrow 1$): $R_i \rightarrow R_{\text{base}}$ — the filter fully utilizes the measurement.
- *Outlier anchor* ($s_i \rightarrow 0$): $R_i \rightarrow R_{\text{base}}(1 + R_{\text{scale}}) = 300$ mm² — the measurement is heavily discounted.

Algorithm 1 Pairwise Consensus Kalman Filter (PC-KF/EKF/UKF)

Require: Raw distances $\mathbf{d}_k$, filter state $\hat{\mathbf{x}}_{k-1}$, $\mathbf{P}_{k-1}$

Ensure: Updated state $\hat{\mathbf{x}}_k$, $\mathbf{P}_k$, scores $\mathbf{s}_k$

```

1:  $\hat{\mathbf{p}}_k \leftarrow \text{LS}(\mathbf{d}_k)$  {Preliminary position}
2: for  $i = 1$  to  $N$  do
3:    $r_i \leftarrow |d_{i,k} - \|\hat{\mathbf{p}}_k - \mathbf{a}_i\||$  {Residual}
4: end for
5: for  $i = 1$  to  $N$  do
6:    $s_i \leftarrow \frac{1}{N-1} \sum_{j \neq i} \left(1 + \frac{(r_i - r_j)^2}{\nu\sigma^2}\right)^{-\frac{\nu+1}{2}}$ 
7: end for
8: for  $i = 1$  to  $N$  do
9:    $R_i \leftarrow R_{\text{base}} \cdot (1 + R_{\text{scale}} \cdot (1 - s_i))$ 
10: end for
11:  $\mathbf{R}_k \leftarrow \text{diag}(R_1, \dots, R_N)$ 
12: Perform KF/EKF/UKF predict step
13: Perform KF/EKF/UKF update with  $\mathbf{R}_k$ 
14: return  $\hat{\mathbf{x}}_k$ ,  $\mathbf{P}_k$ ,  $\mathbf{s}_k$ 

```

C. Integration with Kalman Filter Variants

PC-KF: Each anchor has an independent 1D KF with adaptive R_i from (6). The predict-update equations are:

$$P_{i,k|k-1} = P_{i,k-1} + Q, \quad (7)$$

$$K_i = \frac{P_{i,k|k-1}}{P_{i,k|k-1} + R_i}, \quad (8)$$

$$\hat{d}_{i,k} = \hat{d}_{i,k-1} + K_i(d_{i,k} - \hat{d}_{i,k-1}). \quad (9)$$

The filtered distances are then passed to LS for 2D positioning.

PC-EKF: The adaptive R_i values form a diagonal matrix $\mathbf{R}_k = \text{diag}(R_1, \dots, R_N)$ used in the standard EKF update:

$$\mathbf{S}_k = \mathbf{H}_k \mathbf{P}_{k|k-1} \mathbf{H}_k^\top + \mathbf{R}_k, \quad (10)$$

$$\mathbf{K}_k = \mathbf{P}_{k|k-1} \mathbf{H}_k^\top \mathbf{S}_k^{-1}, \quad (11)$$

$$\hat{\mathbf{x}}_k = \hat{\mathbf{x}}_{k|k-1} + \mathbf{K}_k(\mathbf{z}_k - h(\hat{\mathbf{x}}_{k|k-1})). \quad (12)$$

PC-UKF: Identical to PC-EKF but the Jacobian-based linearization is replaced by the unscented transform. The adaptive $\mathbf{R}_k$ is incorporated into the measurement covariance:

$$\mathbf{P}_{\mathbf{z}\mathbf{z},k} = \sum_{i=0}^{2n} W_i^{(c)} (\mathbf{z}_i - \hat{\mathbf{z}}_k)(\mathbf{z}_i - \hat{\mathbf{z}}_k)^\top + \mathbf{R}_k. \quad (13)$$

The overall algorithm is summarized in Algorithm 1.

IV. EXPERIMENTAL RESULTS

A. Setup

The experimental testbed consists of four DW1000-based UWB anchors mounted at height $H = 1400$ mm at the corners of an 8800×4000 mm rectangular room, with coordinates $\mathbf{a}_1 = [8800, 0]$, $\mathbf{a}_2 = [8800, 4000]$, $\mathbf{a}_3 = [0, 4000]$, and $\mathbf{a}_4 = [0, 0]$ (mm). The tag is moved along a rectangular path with waypoints A(400, 3200) $\rightarrow$ B(400, 1000) $\rightarrow$ C(8000, 1000) $\rightarrow$ D(8000, 3200) $\rightarrow$ A at an approximate speed of 200 mm/s, yielding a total path length of 19,600 mm. Ground truth positions are obtained by linear interpolation

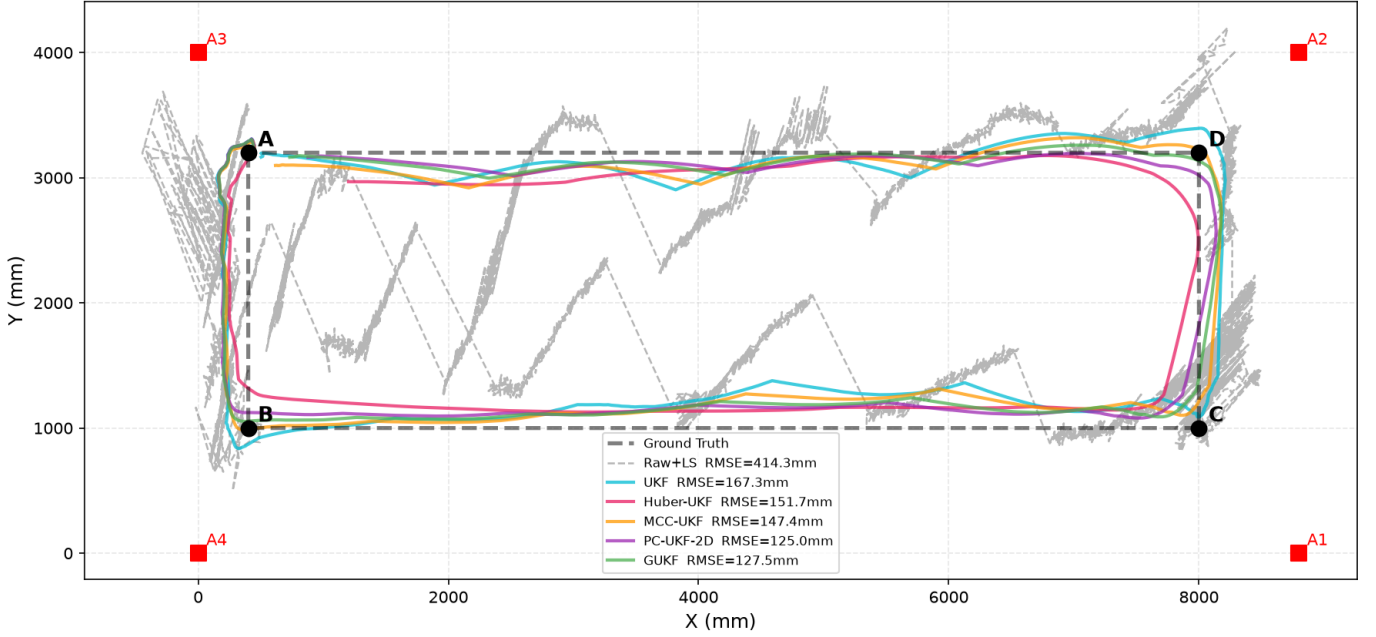


Fig. 1: Intermittent anchor failure case study

along the nominal rectangular path at the recorded timestamps; positioning errors are thus measured relative to the intended trajectory.

The process noise is set to $q = 0.001$ for all Kalman filter variants. Data is collected in two scenarios: (i) **LOS**: eight independent runs where all four anchors maintain line-of-sight to the tag, with ranging at approximately 60 Hz; and (ii) **Degraded anchor**: one run where a single anchor experiences intermittent ranging failures—alternating between valid measurements and dropouts.

B. PC Enhancement Across Filter Variants

Table I presents the LOS positioning accuracy (averaged across eight independent runs) of each baseline filter and its PC-enhanced counterpart. The PC mechanism consistently improves all metrics across all three filter variants:

- **KF** → **PC-KF**: RMSE reduced from 285.6 to 192.3 mm (−32.7%);
- **EKF** → **PC-EKF**: RMSE reduced from 112.4 to 97.2 mm (−13.5%);
- **UKF** → **PC-UKF**: RMSE reduced from 106.5 to 89.0 mm (−16.4%).

The improvement is most pronounced for the KF variant, which operates at the range level and directly benefits from per-anchor noise adaptation. The 2D filters (EKF, UKF) already capture geometric constraints, yet PC scoring still provides meaningful gains by further down-weighting unreliable anchor measurements.

C. Comparison with Other Robust Filters

Table II compares the proposed PC-UKF against state-of-the-art robust UKF variants under LOS conditions. All

TABLE I: LOS Positioning Accuracy: Baseline vs. PC-Enhanced Filters (mm)

Method	RMSE	MAE	CEP50	P95	MAX
Raw + LS	342.1	241.7	169.6	748.4	1713.2
KF + LS	285.6	212.8	160.0	668.9	852.1
PC-KF + LS	192.3	148.6	117.7	389.8	542.6
<i>Improvement</i>	32.7%	30.2%	26.4%	41.7%	36.3%
EKF-2D	112.4	88.2	71.3	229.2	317.2
PC-EKF-2D	97.2	76.2	64.9	202.6	304.1
<i>Improvement</i>	13.5%	13.6%	9.0%	11.6%	4.1%
UKF-2D	106.5	83.7	66.5	218.6	309.6
PC-UKF-2D	89.0	68.7	55.5	193.6	260.1
<i>Improvement</i>	16.4%	17.9%	16.5%	11.4%	16.0%

TABLE II: LOS Comparison with Robust UKF Methods (mm)

Method	RMSE	MAE	CEP50	P95	MAX
Raw + LS	342.1	241.7	169.6	748.4	1713.2
Standard UKF	106.5	83.7	66.5	218.6	309.6
Huber-UKF [4]	106.9	83.5	68.4	221.4	362.3
MCC-UKF [5]	96.8	77.0	63.0	208.0	308.9
GUKF [8]	100.5	79.0	63.8	217.1	299.0
PC-UKF (proposed)	89.0	68.7	55.5	193.6	260.1

methods use the same UKF core with individually tuned hyperparameters.

The proposed PC-UKF achieves the best performance across all metrics with an RMSE of 89.0 mm, reducing error by 16.4% over the standard UKF, 16.7% over Huber-UKF, 8.1% over MCC-UKF, and 11.4% over GUKF. The key advantage of PC-UKF is its *pairwise* evaluation strategy: rather than assessing each measurement in isolation (as Huber, MCC, and GUKF do), it exploits geometric redundancy by cross-

TABLE III: Degraded Anchor Scenario (mm)

Method	RMSE	MAE	CEP50	P95	MAX
Raw + LS	414.3	326.0	252.7	890.4	1099.1
Standard UKF	167.3	145.4	154.0	295.4	378.2
Huber-UKF [4]	151.7	136.8	144.9	246.6	277.1
MCC-UKF [5]	147.4	129.2	121.1	252.7	312.3
GUKF [8]	127.5	111.3	107.0	207.1	242.0
PC-UKF (proposed)	125.0	112.2	111.0	202.2	237.5

checking inter-anchor consistency.

D. Case Study: Intermittent Anchor Failure

To evaluate robustness under adverse conditions, we consider a scenario where one anchor experiences intermittent ranging failures—alternating between valid measurements and dropouts—while the remaining three anchors operate normally. Fig. 1 illustrates the resulting trajectories.

Table III summarizes the positioning accuracy under this condition. The degraded anchor’s intermittent dropouts cause its ranging residual to deviate sharply from the other anchors, which the pairwise consensus mechanism naturally detects and penalizes via a low consensus score.

PC-UKF achieves the lowest RMSE of 125.0 mm—a 25.3% improvement over the standard UKF (167.3 mm), 15.2% over MCC-UKF (147.4 mm), and 2.0% over GUKF (127.5 mm). While GUKF attains slightly better MAE and CEP50 through its Gaussian smoothing approach, PC-UKF maintains a lower RMSE, P95, and MAX error, indicating better control of large outliers. Compared to the LOS scenario (Table II), the relative advantage of PC-UKF over the standard UKF increases from 16.4% to 25.3%, demonstrating that the pairwise consensus mechanism is particularly effective when one anchor provides degraded measurements. All robust methods substantially outperform the standard UKF, confirming the need for adaptive measurement noise handling in practical deployments.

We note that the pairwise consensus mechanism relies on a preliminary LS position estimate to compute geometric residuals (Step 1 in Algorithm 1). When a majority of anchors simultaneously suffer from large NLOS biases, the LS estimate itself may be corrupted, potentially causing the consensus scores to misclassify clean anchors as outliers. In the tested scenarios—where at most one out of four anchors is degraded—this limitation does not manifest, as the remaining three anchors provide sufficient geometric redundancy for a reliable LS estimate.

V. CONCLUSION

This letter presented a Pairwise Consensus scoring mechanism for adaptive measurement noise covariance in Kalman-family filters applied to UWB indoor positioning. By leveraging inter-anchor residual consistency through a Student- t kernel, the proposed method reliably identifies and down-weights unreliable measurements without requiring labeled data or channel models. Experimental results on real UWB data demonstrated consistent improvements across KF, EKF, and UKF variants. Under LOS conditions, PC-UKF achieves

89.0 mm RMSE, outperforming Huber-UKF by 16.7%, MCC-UKF by 8.1%, and GUKF by 11.4%. Under intermittent anchor failure, the advantage is even more pronounced: PC-UKF reduces RMSE by 25.3% over standard UKF, 15.2% over MCC-UKF, and 2.0% over GUKF (125.0 vs. 167.3, 147.4, and 127.5 mm, respectively).

Several limitations should be noted. The evaluation is conducted in a single rectangular indoor environment with four anchors; generalization to diverse room geometries, anchor configurations, and larger anchor counts remains to be validated. The random-walk dynamic model does not capture tag velocity, which may limit performance under fast or variable-speed motion. Additionally, the consensus mechanism assumes that a majority of anchors provide reliable measurements—under simultaneous multi-anchor NLOS, the approach may degrade. Future work will address these limitations by extending evaluation to multiple environments, incorporating velocity-augmented state models, and exploring integration with inertial measurement units.

REFERENCES

- [1] A. Alarifi *et al.*, “Ultra wideband indoor positioning technologies: Analysis and recent advances,” *Sensors*, vol. 16, no. 5, p. 707, 2016.
- [2] S. Marano, W. M. Gifford, H. Wymeersch, and M. Z. Win, “NLOS identification and mitigation for localization based on UWB experimental data,” *IEEE J. Sel. Areas Commun.*, vol. 28, no. 7, pp. 1026–1035, Sep. 2010.
- [3] I. Guvenc, C.-C. Chong, F. Watanabe, and H. Inamura, “NLOS identification and weighted least-squares localization for UWB systems using multipath channel statistics,” *EURASIP J. Adv. Signal Process.*, vol. 2008, pp. 1–14, 2008.
- [4] Y. Huang, Y. Zhang, Z. Wu, N. Li, and J. Chambers, “A novel adaptive Kalman filter with inaccurate process and measurement noise covariance matrices,” *IEEE Trans. Autom. Control*, vol. 63, no. 2, pp. 594–601, Feb. 2018.
- [5] B. Chen, X. Liu, H. Zhao, and J. C. Principe, “Maximum correntropy Kalman filter,” *Automatica*, vol. 76, pp. 70–77, Feb. 2017.
- [6] Y. Huang, B. Cao, and A. Wang, “Design a novel algorithm for enhancing UWB positioning accuracy in GPS denied environments,” *Sci. Rep.*, vol. 14, no. 1, art. 23895, Oct. 2024.
- [7] A. Poulou and D. S. Han, “UWB indoor localization using deep learning LSTM networks,” *Appl. Sci.*, vol. 10, no. 18, p. 6290, 2020.
- [8] D. Sun *et al.*, “A Gaussian unscented Kalman filter algorithm for indoor positioning system using ultra wide band measurement,” *IET Radar Sonar Navig.*, vol. 19, no. 1, e12682, Dec. 2024.
- [9] R. G. Brown, “A baseline GPS RAIM scheme and a note on the equivalence of three RAIM methods,” *Navigation*, vol. 39, no. 3, pp. 301–316, Fall 1992.
- [10] M. Joerger, F. C. Chan, and B. Pervan, “Solution separation versus residual-based RAIM,” *Navigation*, vol. 61, no. 4, pp. 273–291, 2014.
- [11] Y. Chan and K. Ho, “A simple and efficient estimator for hyperbolic location,” *IEEE Trans. Signal Process.*, vol. 42, no. 8, pp. 1905–1915, Aug. 1994.