

POWER: USB/LiPo auto path -> LP5907 3.0 V LDO -> +3V0_A

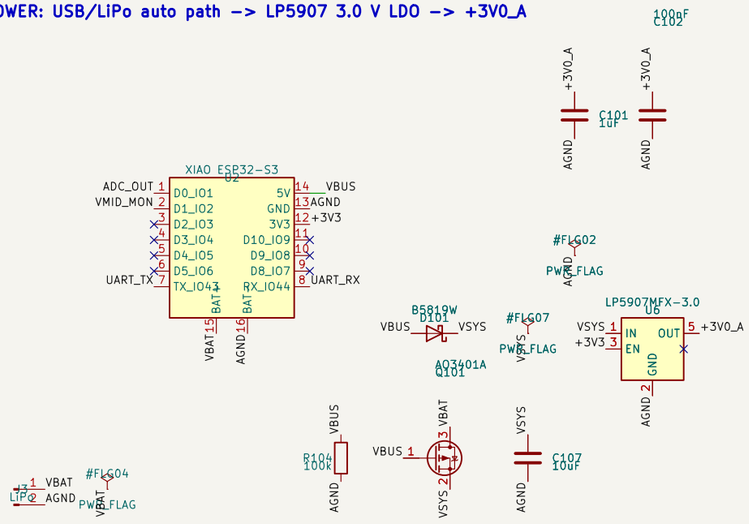

LiPo: J3 wires to the XIAO underside BAT+/BAT− pads (U2 pins 15/16). XIAO is hand-soldered, not JLC assembled.

VMID = 1.5 V: divider, U3A buffer, 47R + 1uF. INA REF from VMID_BUF

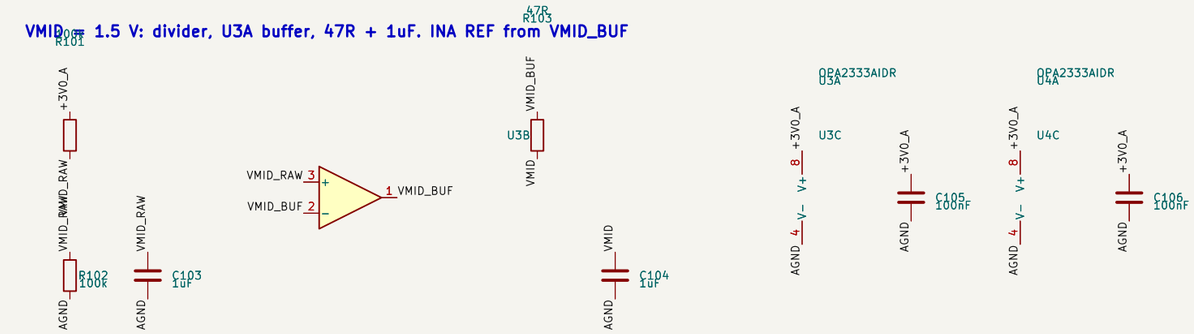


TEST POINTS




DEBUG: USB serial over the XIAO USB-C is the default.
U5/J2 isolated UART is optional and DNP. Populate U5, C701, C702, J2 if needed;
J2 side is powered by the USB-UART adapter (3.3 or 5 V).

ELECTRODE INPUT: 100k series, 10M bias to VMID, RFI filter. D201/D202 clamps DNP

INA333 G1 = 6

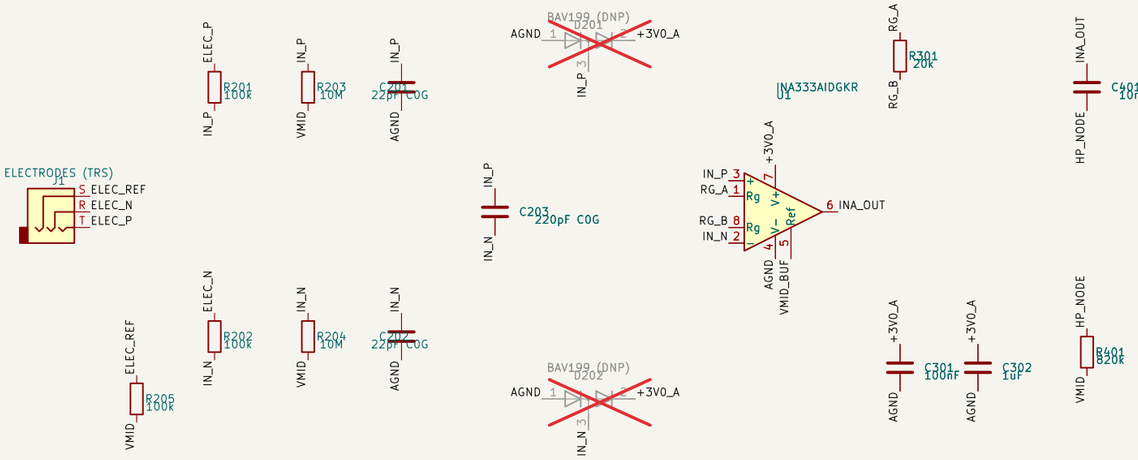


HPF 19.4 Hz, U3B gain: JP401 1-2 = 100k (G2 11, total 66), 2-3 = 390k (G2 40, total 240)

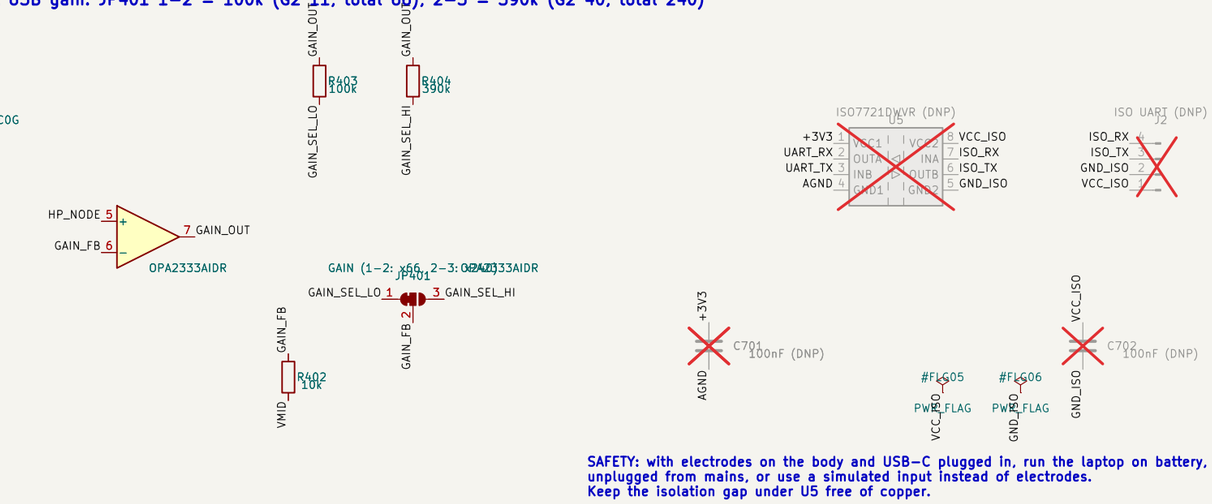


SAFETY: with electrodes on the body and USB-C plugged in, run the laptop on battery,
unplugged from mains, or use a simulated input instead of electrodes.
Keep the isolation gap under U5 free of copper.

ANTI-ALIAS: 4th-order Butterworth Sallen-Key, fc ~480 Hz. R x10, C /10 vs README so all caps are 0603 C0G

Stage A Q 0.55 fc 485 Hz | Stage B Q 1.30 fc 480 Hz

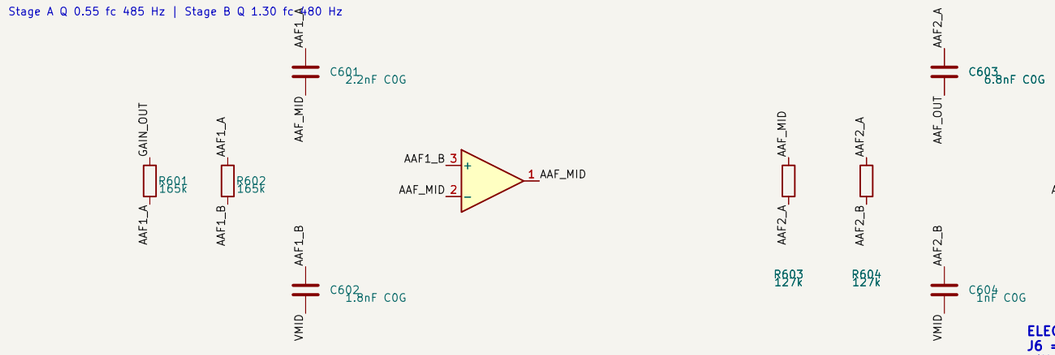

ADC: 1k + 15nF C0G (10.6 kHz) into D0. VMID_MON into D1, subtract in firmware

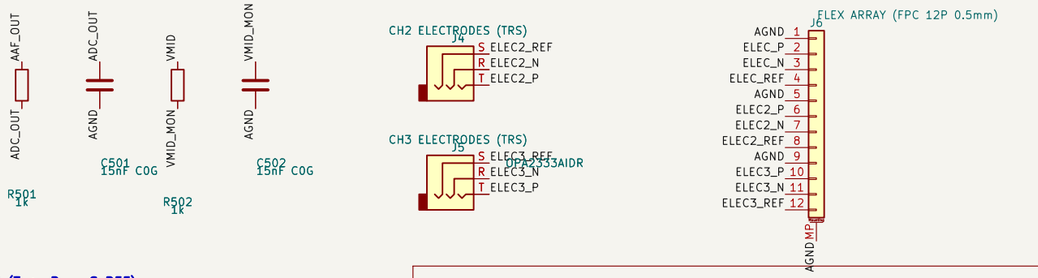

ELECTRODES: J1/J4/J5 TRS per channel (T +, R −, S REF).
J6 = 2 mm flip-lock FPC for a future flex array, in parallel
with the TRS jacks: use one or the other. J6 1/5/9 + MP = AGND guards.
CH2/CH3 join the front end once the ADC choice is made.

Spec: emg_headband/hardware/emg_afe/README.md
Single-channel 3.3 V surface EMG, XIAO ESP32-S3, JLCPCB assembly

Sheet: /
File: emg_wearable_revA.kicad_sch

Title: EMG wearable AFE

Size: A3	Date: 2026-10-11	**Rev: A**
KiCad E.D.A. 10.0.7		Id: 1/1