Ex:no:03

27/7/26

CISCO PACKET TRACER

Analyse the behavior of network device using CISCO PACKET TRACER simulation.

1. From the network component bar, click & drag and drop the below components.
   a. 4 Generic PCs & One HUB
   b. 4 Generic PCs & One Switch


2. Click on computer
   * click on copper straight - through cable
   * Select one of the PC and connect it to HUB using the cable. The link LED should glow in green, indicating the link is up. Simarly connect the remaining 3PCs to the HUB
   * similarly connect 4 PCs to the switch using copper straight through cable.


3. Click on the PCs connected to hub, go to the desktop tab, click on IP configuration and enter an IPaddress and subnet mask. Here the default gateway and DNS server information is not needed as there are only two end device is the network.


4. click on the PDU from the common tool bar
   a. Drag & drop it on the PC and it on another PC connected to the HUB.

5. Observe the flow of PDU from source PC to destination PC by selecting the realtime mode of simulation.

6. Repeat step #3 to step #5 for the PCs connected to the switch.

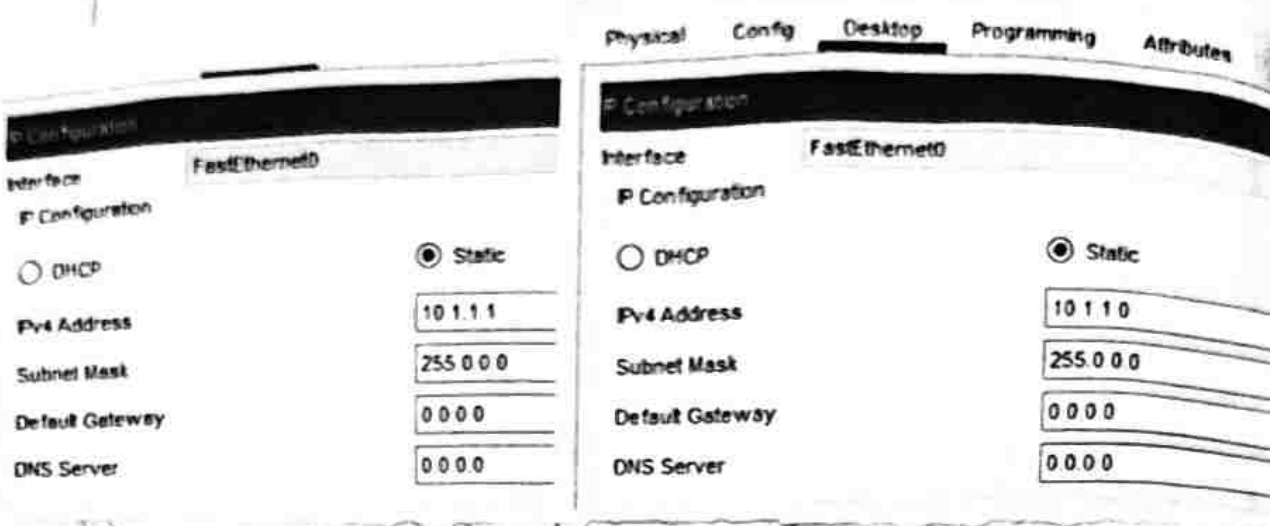

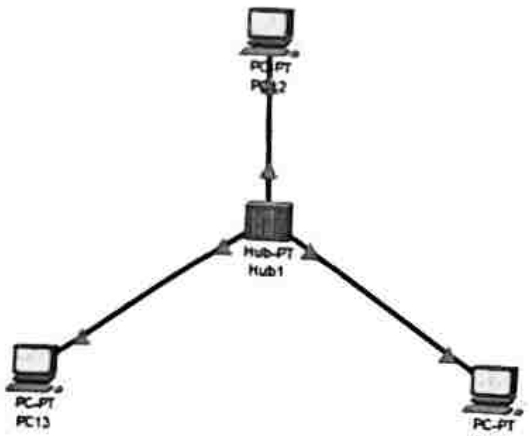

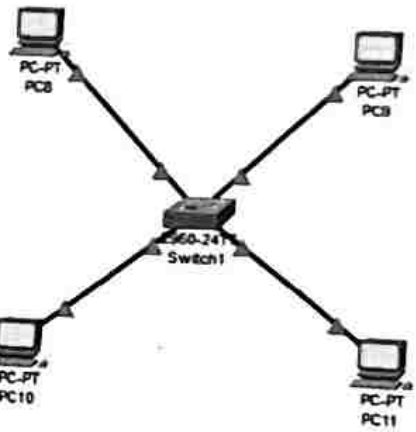

Result:

CISCO PACKET TRACER are learned & executed successfully