

AIM:

To study and practise the various network commands used in Linux and Windows operating systems.

ALGORITHM / PROCEDURE:

1. Open the Terminal in Linux and the Command Prompt (cmd) in Windows.
2. Use hostname to see the name of the computer.
3. Use ifconfig (Linux) and ipconfig (Windows) to see the IP address, subnet mask and MAC address.
4. Use ping to check whether the remote system is reachable. Note the packet loss and the time taken.
5. Use traceroute (Linux) and tracert (Windows) to see the path taken by the packets.
6. Use nslookup and dig to find the IP address of a domain name.
7. Use netstat to see the active connections and open ports.
8. Use arp -a to see the IP address to MAC address table.
9. Use route (Linux) and route print (Windows) to see the routing table.
10. Note down the output of each command.

Commands used:

<i>Purpose</i>	<i>Linux</i>	<i>Windows</i>
Host name	hostname	hostname
IP configuration	ifconfig / ip addr	ipconfig /all
Check connectivity	ping -c 4 google.com	ping google.com
Trace the route	traceroute google.com	tracert google.com
DNS lookup	nslookup / dig	nslookup
Active connections	netstat -tuln	netstat -an
ARP table	arp -a	arp -a
Routing table	route -n	route print
MAC address	ip link	getmac

DIAGRAM:

Fig 1: Network commands and the layers they work in


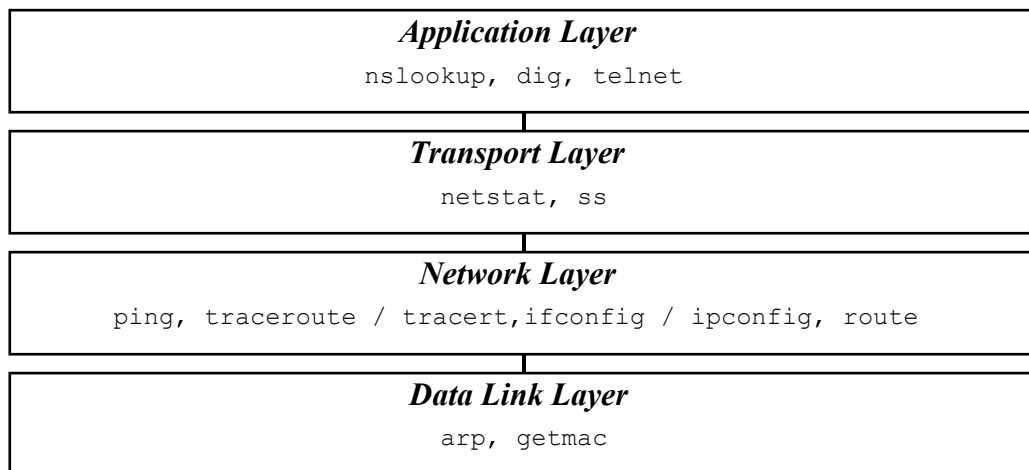


Fig 2: Working of ping command

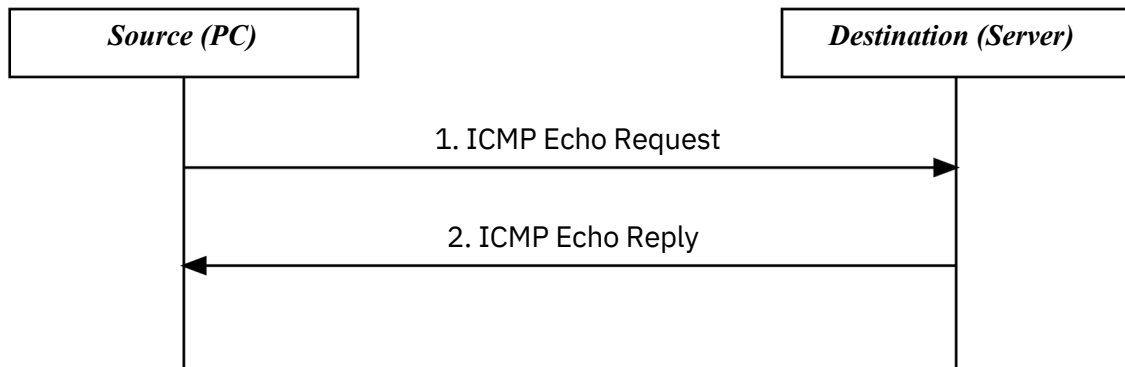

OUTPUT:

Linux:

```
UusSeErR@UusSeErR-VirtualBox: ~
UusSeErR@UusSeErR-VirtualBox:~$ hostname
-UusSeErR-VirtualBox
UusSeErR@UusSeErR-VirtualBox: ~
UusSeErR@UusSeErR-VirtualBox:~$ ifconfig
enp0s3: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.1.10 netmask 255.255.255.0 broadcast 192.168.1.255
    inet6 fe80::a00:27ff:fe4e:66a1 prefixlen 64 scopeid 0x20<link>
    ether 08:00:27:4e:66:a1 txqueuelen 1000 (Ethernet)
    RX packets 2543 bytes 2154321 (2.1 MB)
    TX packets 1987 bytes 312456 (312.4 KB)

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
```

```
UusSeEr@UusSeEr-VirtualBox: ~
```

```
UusSeEr@UusSeEr-VirtualBox:~$ ping -c 4 google.com
PING google.com (142.250.195.78) 56(84) bytes of data.
64 bytes from maa03s45-in-f14.1e100.net (142.250.195.78): icmp_seq=1 ttl=117 time=14.2 ms
64 bytes from maa03s45-in-f14.1e100.net (142.250.195.78): icmp_seq=2 ttl=117 time=14.8 ms
64 bytes from maa03s45-in-f14.1e100.net (142.250.195.78): icmp_seq=3 ttl=117 time=13.9 ms
64 bytes from maa03s45-in-f14.1e100.net (142.250.195.78): icmp_seq=4 ttl=117 time=15.2 ms

--- google.com ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3005ms
rtt min/avg/max/mdev = 13.904/14.525/15.230/0.512 ms
```

```
UusSeEr@UusSeEr-VirtualBox: ~
```

```
UusSeEr@UusSeEr-VirtualBox:~$ traceroute google.com
traceroute to google.com (142.250.195.78), 30 hops max, 60 byte packets
 1 _gateway (192.168.1.1) 1.102 ms 1.045 ms 0.987 ms
 2 10.20.0.1 (10.20.0.1) 4.321 ms 4.287 ms 4.410 ms
 3 172.16.5.9 (172.16.5.9) 8.765 ms 8.801 ms 8.730 ms
 4 72.14.215.85 (72.14.215.85) 12.543 ms 12.498 ms 12.610 ms
 5 maa03s45-in-f14.1e100.net (142.250.195.78) 14.230 ms 14.187 ms 14.301 ms
```

```
UusSeEr@UusSeEr-VirtualBox: ~
```

```
UusSeEr@UusSeEr-VirtualBox:~$ nslookup google.com
Server:          192.168.1.1
Address:         192.168.1.1#53

Non-authoritative answer:
Name:   google.com
Address: 142.250.195.78
```

```
UusSeEr@UusSeEr-VirtualBox: ~
```

```
UusSeEr@UusSeEr-VirtualBox:~$ dig google.com +short
142.250.195.78
```

```
UusSeEr@UusSeEr-VirtualBox: ~
```

```
UusSeEr@UusSeEr-VirtualBox:~$ netstat-tuln
Active Internet connections (onlyservers)
Proto Recv-Q Send-Q Local Address           Foreign Address         State
tcp        0      0 0.0.0.0:22              0.0.0.0:*               LISTEN
tcp        0      0 127.0.0.1:631           0.0.0.0:*               LISTEN
tcp6       0      0 :::80                  :::*                    LISTEN
udp        0      0 0.0.0.0:68             0.0.0.0:*
```

```
UusSeEr@UusSeEr-VirtualBox: ~
```

```
UusSeEr@UusSeEr-VirtualBox:~$ arp -a
_gateway (192.168.1.1) at c4:e9:84:2a:5b:10 [ether] on enp0s3
? (192.168.1.12) at 3c:52:82:7d:11:9e [ether] on enp0s3
```

```
UusSeEr@UusSeEr-VirtualBox: ~
```

```
UusSeEr@UusSeEr-VirtualBox:~$ route -n
Kernel IP routing table
Destination Gateway      Genmask         Flags Metric Ref    Use Iface
0.0.0.0     192.168.1.1  0.0.0.0         UG    100    0      0 enp0s3
192.168.1.0 0.0.0.0     255.255.255.0   U     100    0      0 enp0s3
```

Windows:

Command Prompt

```
C:\Users\UusSeErR>hostname  
DESKTOP-UusSeErR
```

Command Prompt

```
C:\Users\UusSeErR>ipconfig /all
```

Windows IP Configuration

```
Host Name . . . . . : DESKTOP-UusSeErR  
Primary Dns Suffix . . . . . :  
Node Type . . . . . : Hybrid  
IP Routing Enabled. . . . . : No
```

Ethernet adapter Ethernet:

```
Physical Address. . . . . : 00-1A-2B-3C-4D-5E  
DHCP Enabled. . . . . : Yes  
IPv4 Address. . . . . : 192.168.1.25 (Preferred)  
Subnet Mask . . . . . : 255.255.255.0  
Default Gateway . . . . . : 192.168.1.1  
DHCP Server . . . . . : 192.168.1.1  
DNS Servers . . . . . : 8.8.8.8
```

Command Prompt

```
C:\Users\UusSeErR>ping google.com
```

```
Pinging google.com [142.250.195.78] with 32 bytes of data:  
Reply from 142.250.195.78: bytes=32 time=15ms TTL=117 Reply  
from 142.250.195.78: bytes=32 time=14ms TTL=117 Reply from  
142.250.195.78: bytes=32 time=14ms TTL=117 Reply from  
142.250.195.78: bytes=32 time=16ms TTL=117
```

Ping statistics for 142.250.195.78:

```
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
Minimum = 14ms, Maximum = 16ms, Average = 14ms
```

Command Prompt

```
C:\Users\UusSeErR>tracert google.com
```

```
Tracing route to google.com [142.250.195.78]  
over a maximum of 30 hops:
```

1	<1ms	<1ms	<1ms	192.168.1.1
2	4ms	4ms	4ms	10.20.0.1
3	9ms	8ms	9ms	172.16.5.9
4	13ms	12ms	12ms	72.14.215.85
5	14ms	14ms	15ms	142.250.195.78

```
Trace complete.
```

Command Prompt

```
C:\Users\UusSeErR>nslookup google.com
```

```
Server: dns.google  
Address: 8.8.8.8
```

Non-authoritative answer:

```
Name: google.com  
Address: 142.250.195.78
```

Command Prompt					
C:\Users\UusSeErR>netstat -an					
Active Connections					
Proto	Local	Address	Foreign	Address	State
TCP	0.0.0.0:135		0.0.0.0:0		LISTENING
TCP	0.0.0.0:445		0.0.0.0:0		LISTENING
TCP	192.168.1.25:50234		142.250.195.78:443		ESTABLISHED
UDP	0.0.0.0:5353		*.*		

Command Prompt					
C:\Users\UusSeErR>arp -a					
Interface: 192.168.1.25 --- 0x8					
Internet Address		Physical Address		Type	
192.168.1.1		c4-e9-84-2a-5b-10		dynamic	
192.168.1.255		ff-ff-ff-ff-ff-ff		static	

Command Prompt					
C:\Users\UusSeErR>route print					
IPv4 Route Table					
=====					
Active Routes:					
Network Destination	Netmask	Gateway	Interface	Metric	
0.0.0.0	0.0.0.0	192.168.1.1	192.168.1.25	25	
127.0.0.0	255.0.0.0	On-link	127.0.0.1	331	
192.168.1.0	255.255.255.0	On-link	192.168.1.25	281	

Command Prompt					
C:\Users\UusSeErR>getmac					
Physical Address		Transport Name			
=====		=====			
00-1A-2B-3C-4D-5E		\Device\NPF{8F3A21B0-5C6D-4E7F-9A1B-2C3D4E5F6A7B}			

RESULT:

Thus the various network commands used in Linux and Windows were studied and executed successfully.